
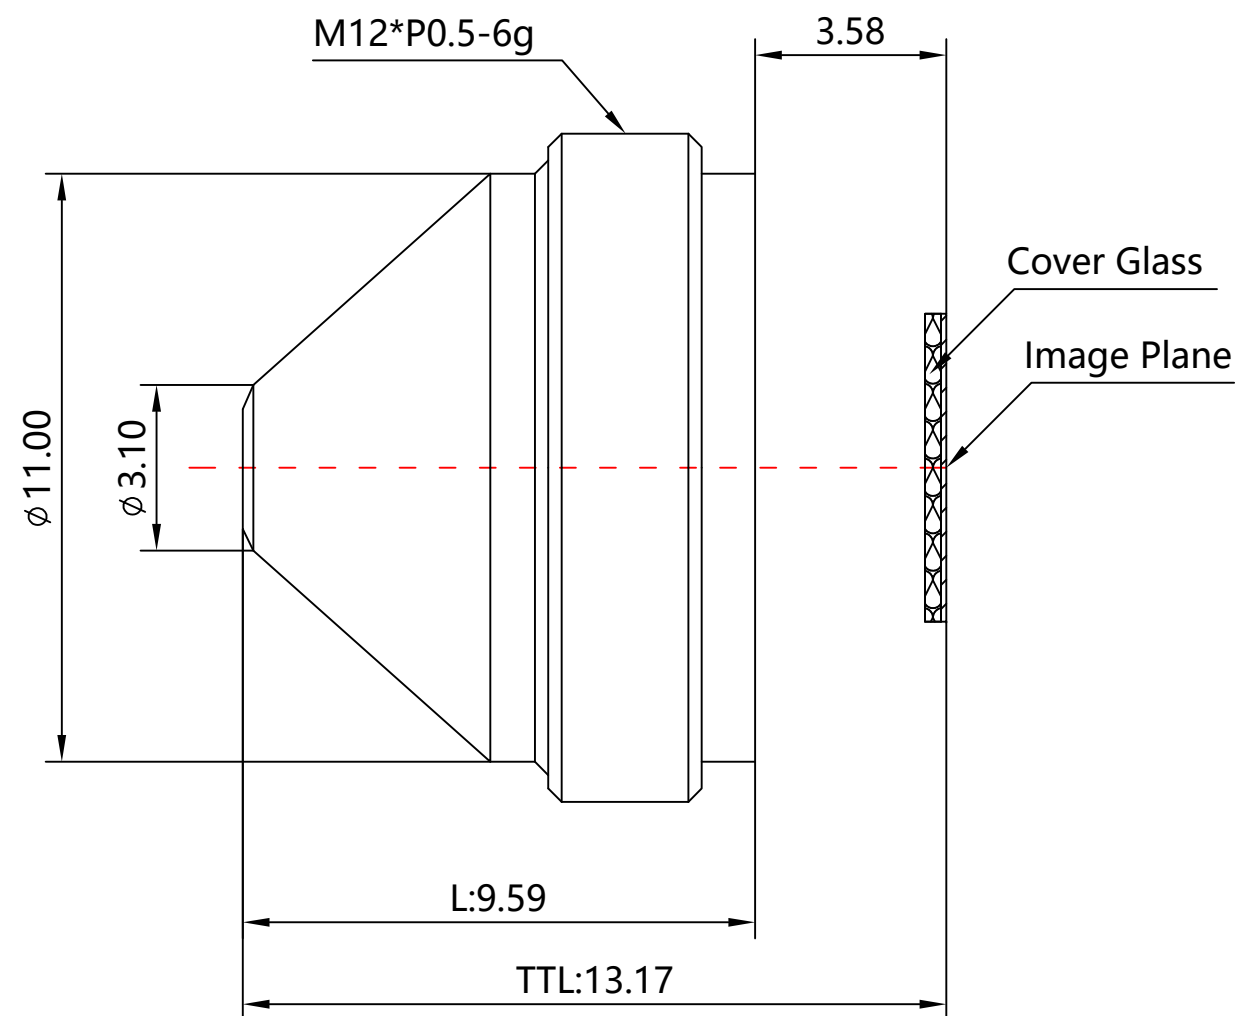


1	Type	Pinhole Lens	
2	Resolution	MP	
3	Image Format	1/3"	
4	Image Circle	φ6.2mm(MAX)	
5	EFL	3.7mm	
6	TTL	13.17mm	
7	F/NO.	2.5	
8	FFL (M)	3.58mm	
9	BFL (O)	4.55mm	
10	For Sensor	1/3"	
11	F.O.V	Horizontal	90°
12		Vertical	70°
13		Diagonal	110°
14	TV Distortion	<-13%	
15	Relative Ill.	>55%	
16	Chief Ray Angle	<20°	
17	M.O.D	0.1m~∞	
18	Mount Type	M12*P0.5-6g	
19	Dimension Figure	φ12.00*L9.59mm	
20	Lens Structure	6pcs Glass Lens	
21	IR-Filter	T=50%&IR650±10nm	
22	Weight	1.4g	
23	Iris Operation	Fixed	
24	Zoom Operation	Fixed	
25	Focus Operation	Manual	
26	Operating Temperature	-20° ~+85°	
27	Storage Temperature	-20° ~+85°	

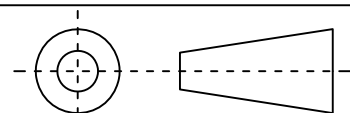

Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
5: 1	X	± 0.2	2019-05-12	CH1926PB Rev1.0		
	X.0	± 0.15				
Units	X.00	± 0.10	Design	Linda	2017-01-15	 3D Angle Projection
	X.000	± 0.001	Checked	Anna	2017-03-19	
mm	Angle	± 0.5°	Approval	Sanmu	2017-03-27	