
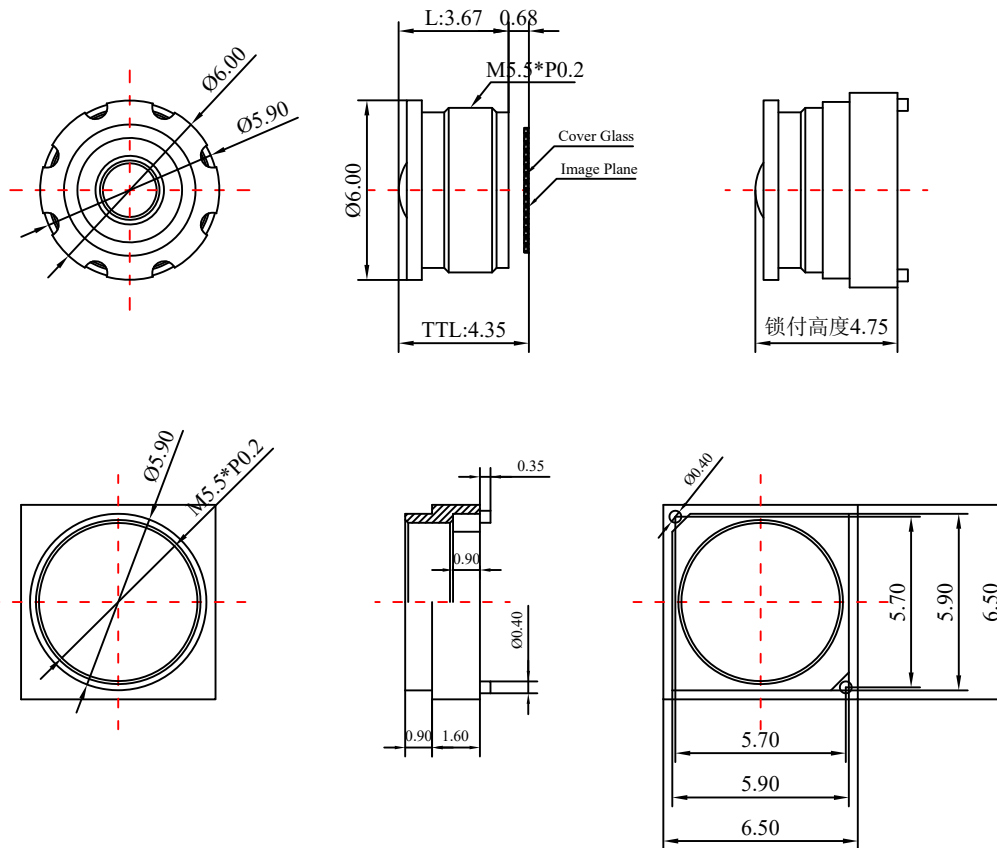


1	Type		M5.5 Lens
2	Resolution		MP
3	Image Format		1/6"
4	Image Circle		φ3.3mm(MAX)
5	EFL		1.36mm
6	TTL		4.35mm
7	F/NO.		F2.4
8	FFL (M)		0.68mm
9	BFL (O)		0.79mm
10	For Sensor		1/6" SC031GS
11	F.O.V	Horizontal	99.2°
12		Vertical	73.4°
13		Diagonal	132.7°
14	TV Distortion		<-10%
15	Relative Ill.		>55%
16	Chief Ray Angle		<32.6°
17	M.O.D		0.005m~∞
18	Mount Type		M5.5*P0.2
19	Dimension Figure		φ6.0*L3.67mm
20	Lens Structure		4P
21	IR-Filter		IR650nm
22	Waterproof		No
23	Weight		---
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-15° ~+45°
28	Storage Temperature		-15° ~+45°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2023-06-28	CH2035AB Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2023-04-27	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2023-05-16	
mm	Angle	±0.5°	Approval	Sanmu	2023-05-23	