



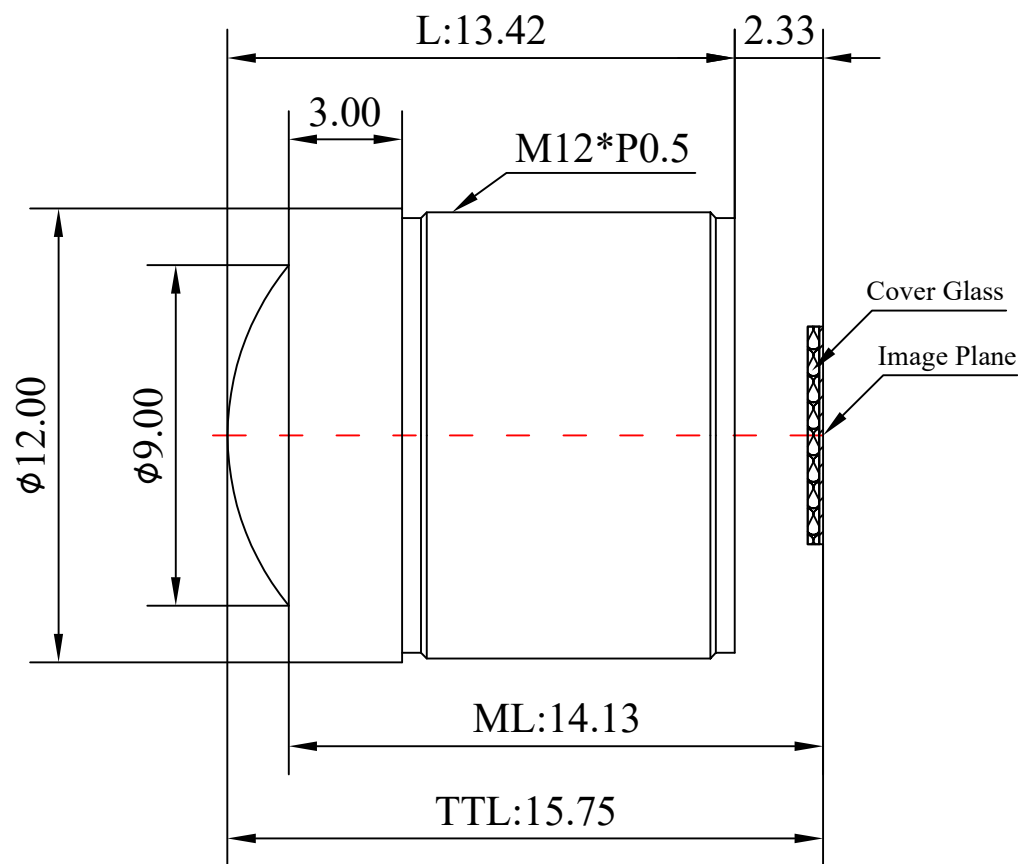

PRODUCT: CH3559K

1	Type		Low Distortion Lens
2	Resolution		MP
3	Image Format		1/2.7"
4	Image Circle		φ7.0mm(MAX)
5	EFL		2.96mm
6	TTL		15.75mm
7	F/NO.		2.5
8	FFL (M)		2.33mm
9	BFL (O)		3.26mm
10	For Sensor		OV2710
11	F.O.V	Horizontal	88.3°
12		Vertical	57.1°
13		Diagonal	98°
14	TV Distortion		<-1%
15	Relative Ill.		>60%
16	Chief Ray Angle		<15.6°
17	M.O.D		0.1m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		φ12.0*L13.42mm
20	Lens Structure		4G2P(PM)
21	IR-Filter		T=50% & 650±10nm
22	Waterproof		No
23	Weight		3g
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-20° ~+85°
28	Storage Temperature		-20° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2019-05-22	CH3559K Rev1.0		
4:1	X.0	±0.15				
Untis	X.00	±0.10	Design	Linda	2018-05-26	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2018-07-20	
mm	Angle	±0.5°	Approval	Sanmu	2018-07-20	