
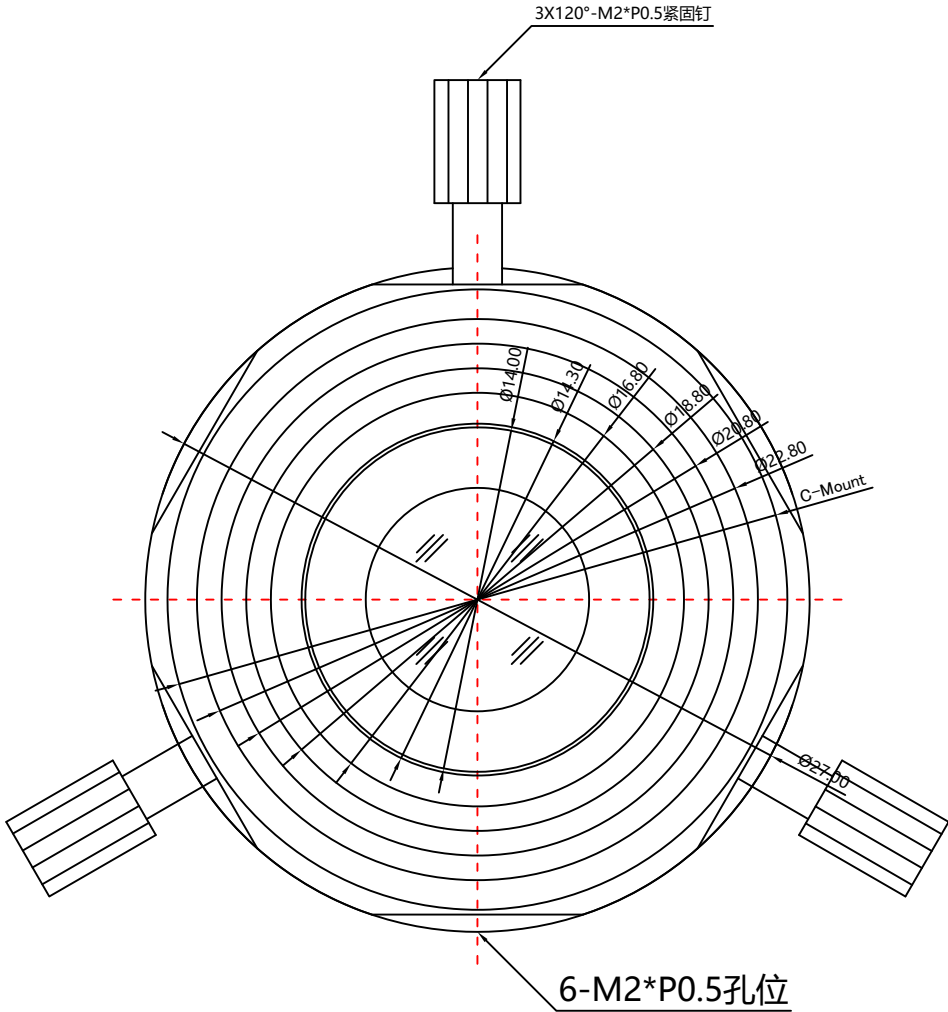
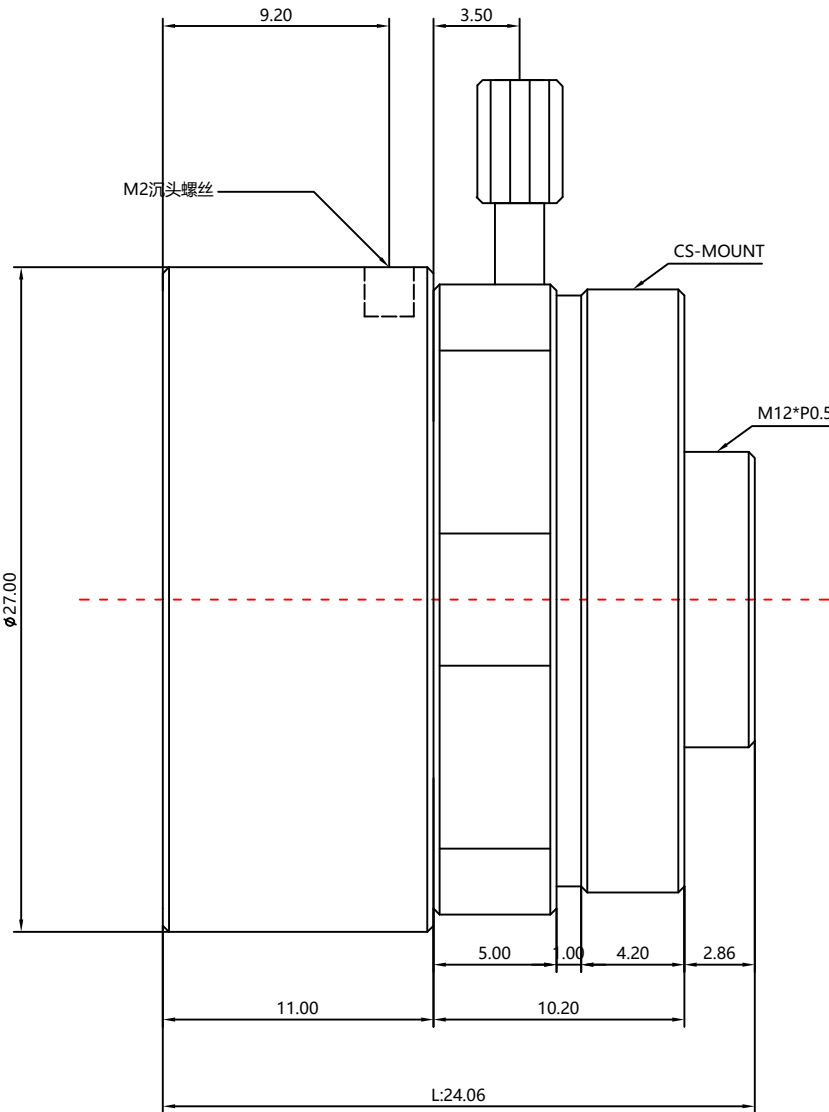


1	Sensor		Low Distortion Lens
2	Resolution		4K
3	Image Format		1/2.3"
4	Image Circle		φ8.00mm(MAX)
5	EFL		4.55mm
6	TTL		22.3mm
7	F/NO.		3.2
8	FFL (M)		4.87mm
9	BFL (O)		5.03mm
10	For Sensor		MT9J003&OV14810
11	F.O.V	Horizontal	71°
12		Vertical	50°
13		Diagonal	82°
14	TV Distortion		<-0.5%
15	Relative Ill.		>69%
16	Chief Ray Angle		14°
17	M.O.D		0.1m~∞
18	Mount Type		CS-Mount
19	Dimension Figure		φ27.0*L24.06mm
20	Lens Structure		3G2P
21	IR-Filter		T=50%@650nm±20nm
22	Weight		25.7g
23	Iris Operation		Fixed
24	Zoom Operation		Fixed
25	Focus Operation		Manual
26	Operating Temperature		-20° ~+45°
27	Storage Temperature		-20° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	± 0.2	2020-05-13	CH3645AB Rev1.0		
4: 1	X.0	± 0.15				
Units	X.00	± 0.10	Design	Linda	2017-03-09	 3D Angle Projection
	X.000	± 0.001	Checked	Anna	2017-06-10	
mm	Angle	± 0.5°	Approval	Sanmu	2017-06-10	