
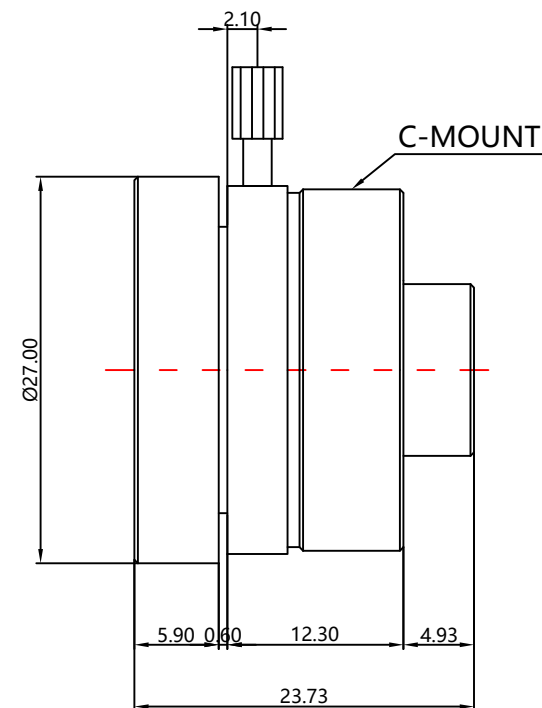
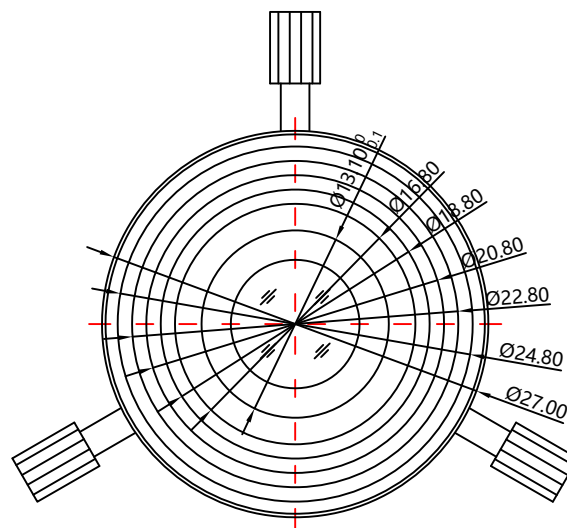


1	Sensor	Low Distortion Lens
2	Resolution	4K
3	Image Format	1/2.3"
4	Image Circle	φ8.00mm(MAX)
5	EFL	4.55mm
6	TTL	22.3mm
7	F/NO.	3.2
8	FFL (M)	4.87mm
9	BFL (O)	5.03mm
10	For Sensor	MT9J003&OV14810
11	F.O.V	Horizontal 71°
12		Vertical 50°
13		Diagonal 82°
14	TV Distortion	<-0.5%
15	Relative Ill.	>69%
16	Chief Ray Angle	14°
17	M.O.D	0.1m~∞
18	Mount Type	C-Mount
19	Dimension Figure	φ27.0*L23.73mm
20	Lens Structure	3G2P
21	IR-Filter	T=50%@650nm±20nm



22	Weight	20.8g	Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
23	Iris Operation	Fixed		4: 1	X	± 0.2	2020-10-12	CH3645AC Rev1.0	
24	Zoom Operation	Fixed	X.0		± 0.15				
25	Focus Operation	Manual	Units	X.00	± 0.10	Design	Linda	2017-03-09	 3D Angle Projection
26	Operating Temperature	-20° ~+45°		X.000	± 0.001	Checked	Anna	2017-06-10	
27	Storage Temperature	-20° ~+85°	mm	Angle	± 0.5 °	Approval	Sanmu	2017-06-10	