



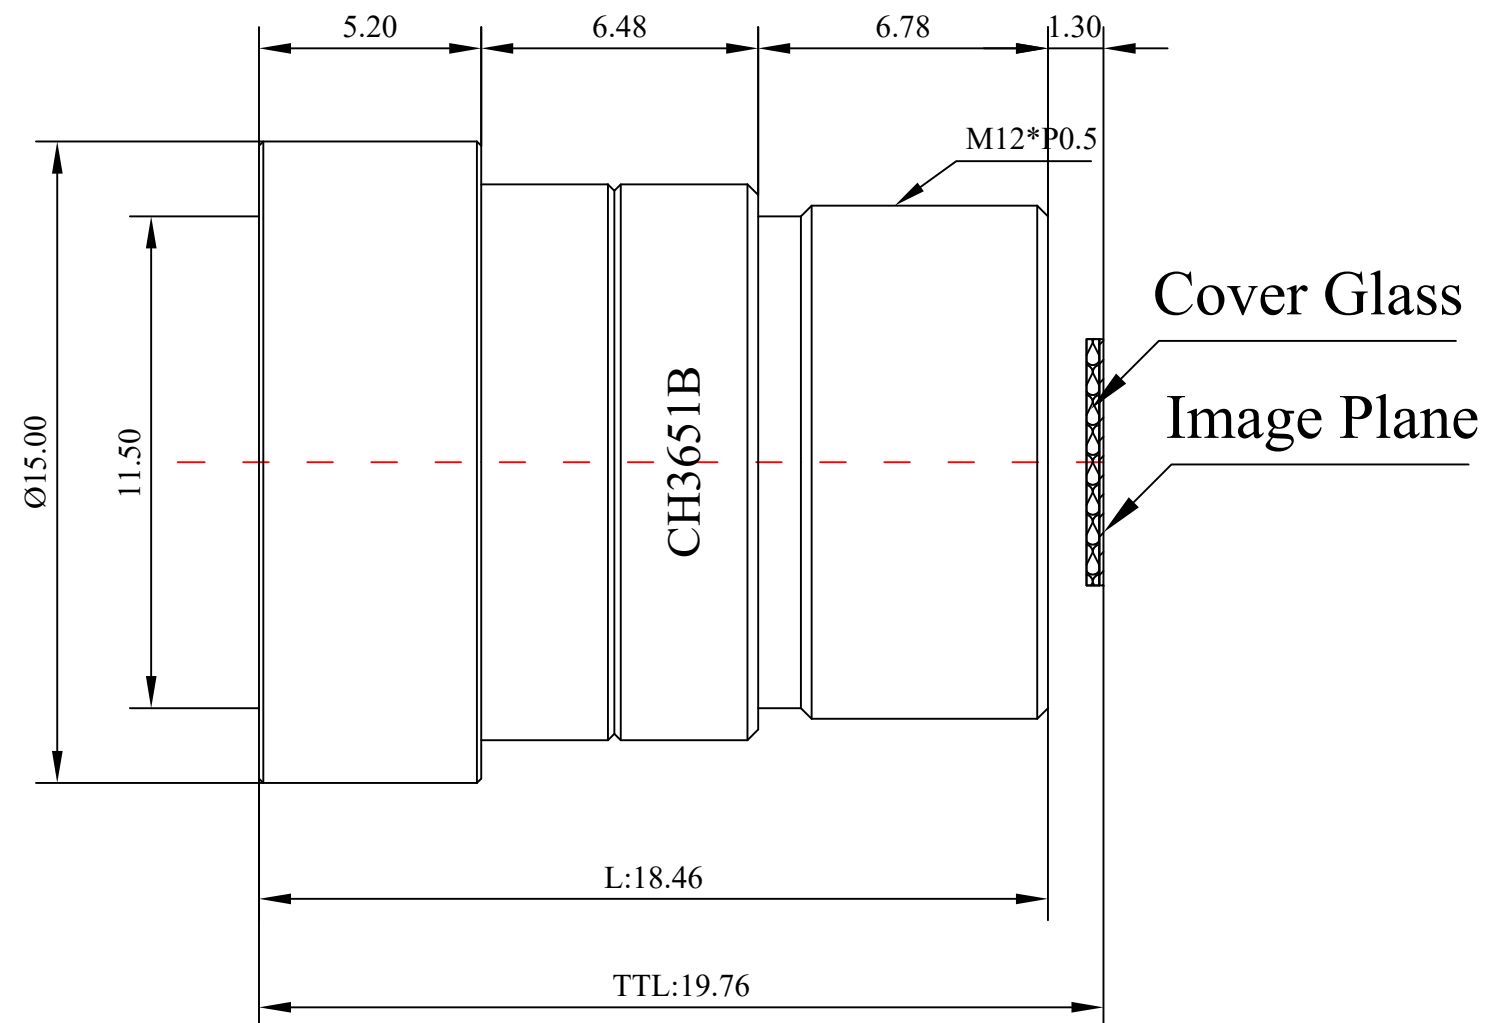

1	Type			TOF Lens		
2	Resolution			MP		
3	Image Format			1/2"		
4	Image Circle			φ8.5mm(MAX)		
5	EFL			3.6mm		
6	TTL			19.76mm		
7	F/NO.			1.2		
8	FFL (M)			1.30mm		
9	BFL (O)			2.91mm		
10	For Sensor	MLX75027	MLX75023	OPT8241	epc635	OPT8320
11	Horizontal	109.4°	78.7°	78.7°	51.3°	38.2°
12	Vertical	78.7°	57.9°	57.9°	19.1°	28.6°
13	Diagonal	150.9°	101.2°	101.2°	54.9°	48°
14	TV Distortion	<26.2%	<10.9%	<-10.9%	<-3%	<-2.2%
15	Relative Ill.	>65.6%	>89.1%	>89.1%	>96.6%	>97.4%
16	C.R.A	<15°	<12.5°	<12.5°	<7.8°	<6.9°
17	M.O.D			0.1m~∞		
18	Mount Type			M12*P0.5		
19	Dimension Figure			φ15.00*L18.46mm		
20	Lens Structure			3G+2GM		
21	IR-Filter			IR850nm		
22	Waterproof			No		
23	Weight			6.7g		
24	Iris Operation			Fixed		
25	Zoom Operation			Fixed		
26	Focus Operation			Manual		
27	Operating Temperature			-20° ~+85°		
28	Storage Temperature			-20° ~+85°		



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2021-10-18	CH3651B Rev1.1		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2019-05-26	 3D Angle Projection
mm	X.000	±0.001	Checked	Anna	2019-07-20	
	Angle	±0.5°	Approval	Sanmu	2019-07-29	