
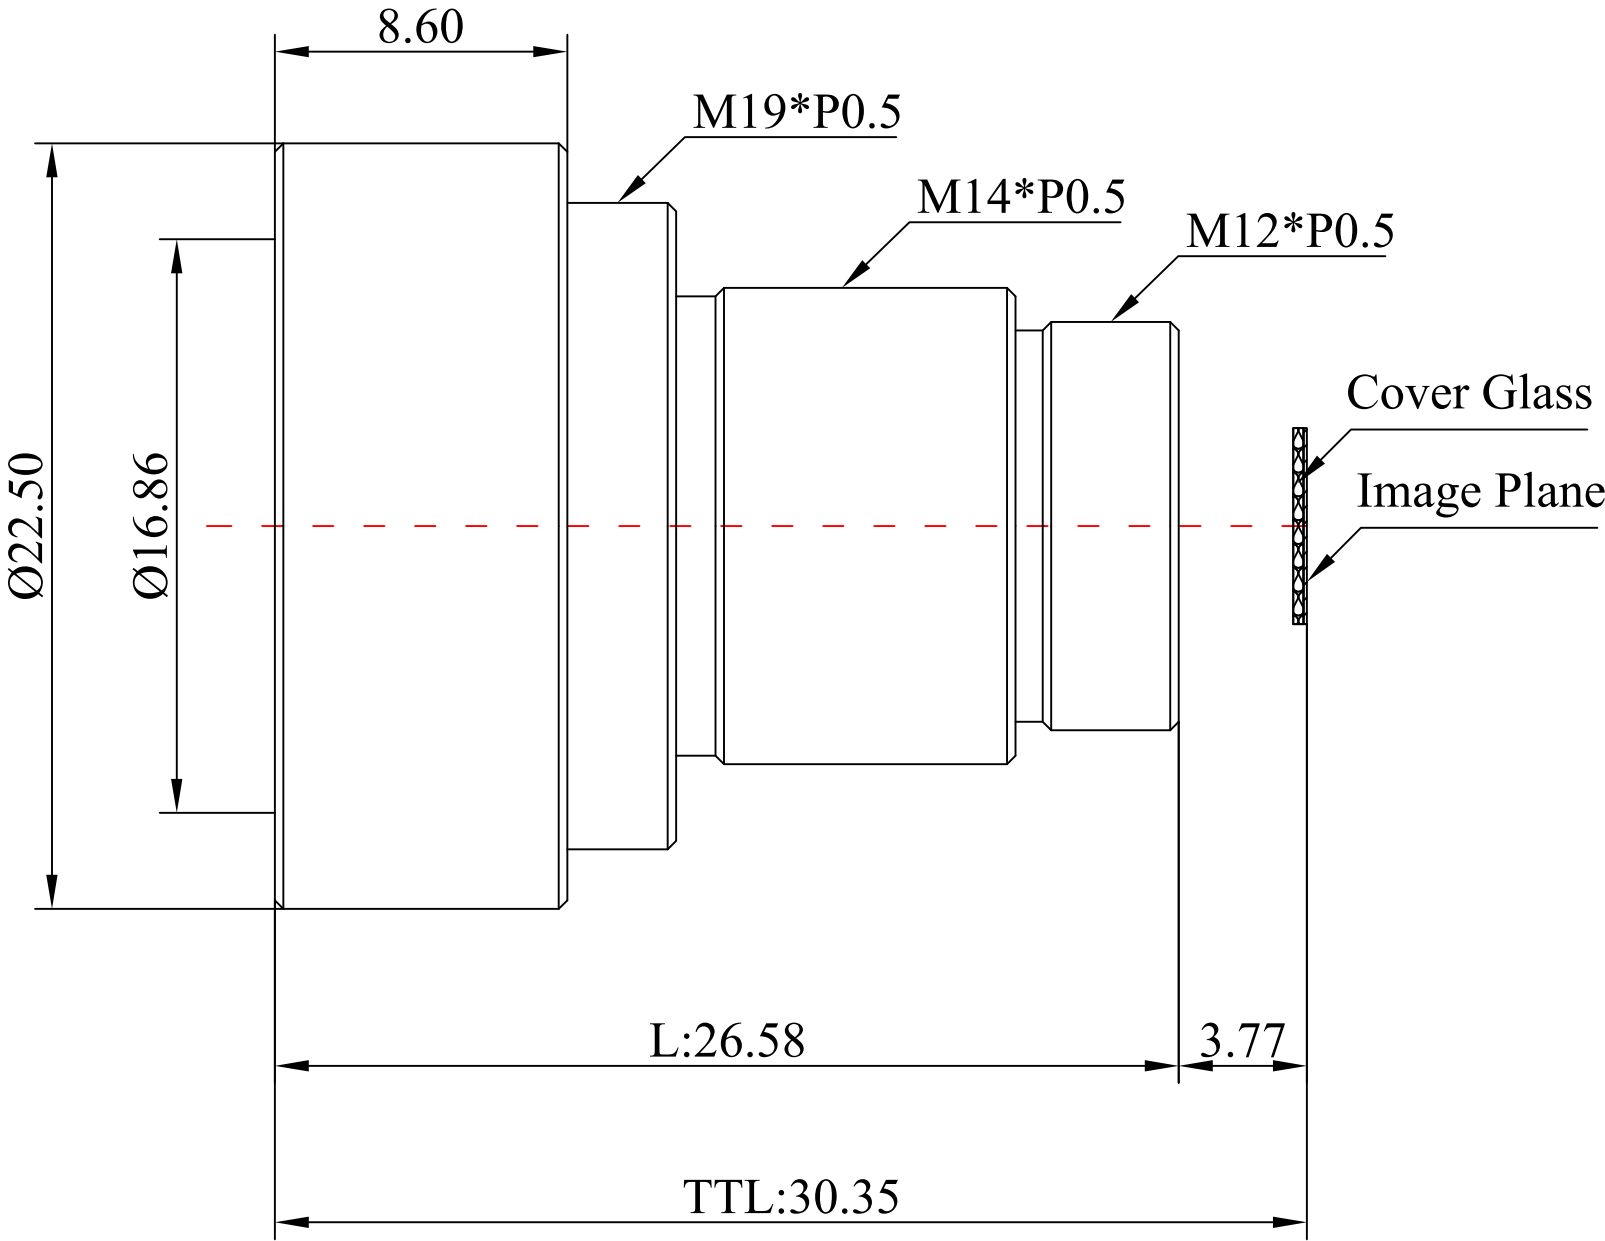


1	Type		ToF Lens		
2	Resolution		MP		
3	Image Format		1/3"		
4	Image Circle		φ6.0mm(MAX)		
5	EFL		3.3mm		
6	TTL		30.35mm		
7	F/NO.		1.1		
8	FFL (M)		3.89mm		
9	BFL (O)		7.83mm		
10	For Sensor	MLX75023	OPT8241	epc635	OPT8320
11	Horizontal	89.1°	89.1°	56.9°	42.1°
12	Vertical	64.6°	64.6°	20.8°	31.4°
13	Diagonal	117.6°	117.6°	61°	53.1°
14	TV Distortion	<-15.6%	<-15.6%	<-4.2%	<-3.1%
15	Relative Ill.	>72.1%	>72.1%	>91.1°	>93.4°
16	C.R.A	<10.3°	<10.3°	<6.5°	<5.9°
17	M.O.D		0.1m~∞		
18	Mount Type		M12*P0.5/M14*P0.5		
19	Dimension Figure		φ22.50*L26.46mm		
20	Lens Structure		1G2P		
21	IR-Filter		IR940nm		
22	Waterproof		No		
23	Weight		11.6g		
24	Iris Operation		Fixed		
25	Zoom Operation		Fixed		
26	Focus Operation		Manual		
27	Operating Temperature		-20° ~+85°		
28	Storage Temperature		-20° ~+85°		



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2020-05-09	CH3652C Rev1.0		
	4:1	X.0	±0.15			
Units	X.00	±0.10	Design	Linda	2019-05-26	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2019-07-20	
mm	Angle	±0.5°	Approval	Sanmu	2019-07-29	