
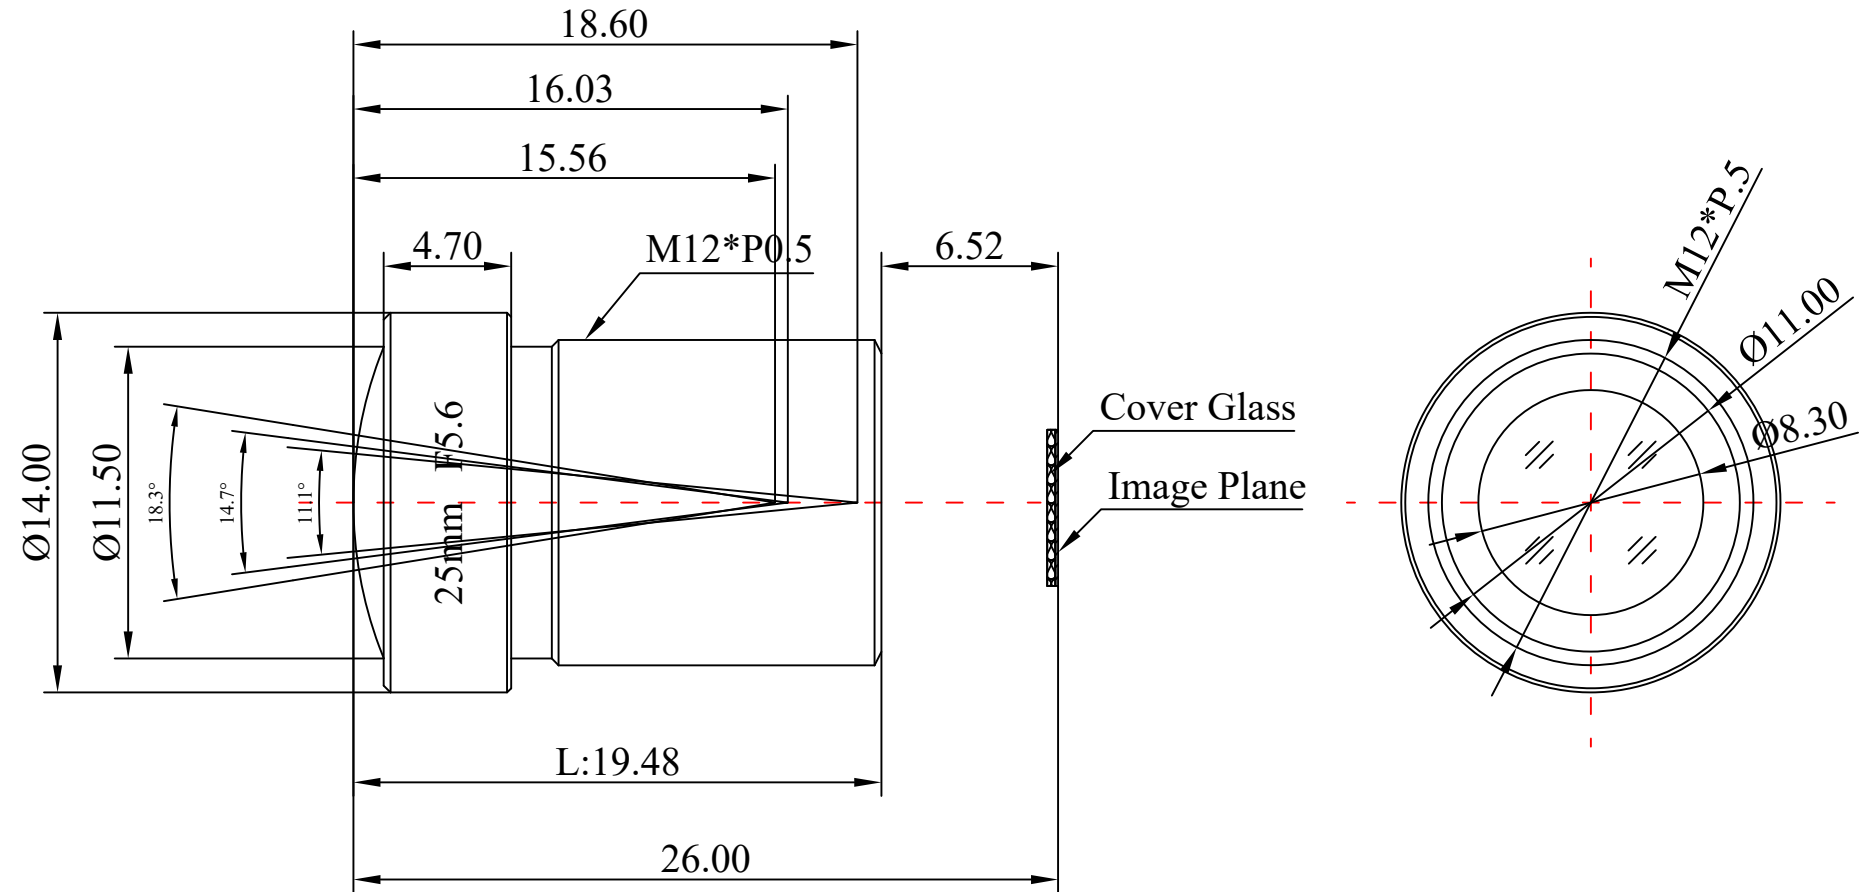


| | | | | | |
|----|-----------------------|-----------------|---------|---------|-------|
| 1 | Type | Board Lens | | | |
| 2 | Resolution | 5MP | | | |
| 3 | Image Format | 1/2" | | | |
| 4 | Image Circle | φ8.0mm(MAX) | | | |
| 5 | EFL | 25mm | | | |
| 6 | TTL | 26.00mm | | | |
| 7 | F/NO. | 5.6 | | | |
| 8 | FFL (M) | 6.52mm | | | |
| 9 | BFL (O) | 11.98mm | | | |
| 10 | For Sensor | 1/2" | 1/3" | 1/4" | |
| 11 | F.O.V | Horizontal | 14.7° | 11.1° | 8.3° |
| 12 | | Vertical | 11.1° | 8.3° | 6.3° |
| 13 | | Diagonal | 18.3° | 13.8° | 10.4° |
| 14 | OPT Distortion | <-1.13% | <-0.64% | <-0.36% | |
| 15 | Relative Ill. | >55% | | | |
| 16 | Chief Ray Angle | <7.4° | | | |
| 17 | M.O.D | 0.3m~∞ | | | |
| 18 | Mount Type | M12*P0.5 | | | |
| 19 | Dimension Figure | φ14.00*L19.48mm | | | |
| 20 | Lens Structure | 4G | | | |
| 21 | IR-Filter | Non-IR | | | |
| 22 | Waterproof | No | | | |
| 23 | Weight | 5.0g | | | |
| 24 | Iris Operation | Fixed | | | |
| 25 | Zoom Operation | Fixed | | | |
| 26 | Focus Operation | Manual | | | |
| 27 | Operating Temperature | -20° ~+85° | | | |
| 28 | Storage Temperature | -20° ~+85° | | | |

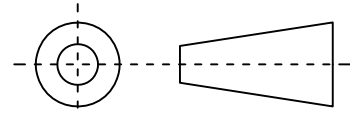

Remark:有刻字

| Scale | Remark | Tolerances | Date | Revised | | 福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD |
|-------|--------|------------|------------|----------------|------------|--|
| 4:1 | X | ±0.2 | 2020-06-11 | CH3664B Rev1.0 | | |
| | X.0 | ±0.15 | | | | |
| Units | X.00 | ±0.10 | Design | Linda | 2016-05-26 |  3D Angle Projection |
| | X.000 | ±0.001 | Checked | Anna | 2016-07-20 | |
| mm | Angle | ±0.5° | Approval | Sanmu | 2016-07-20 | |