
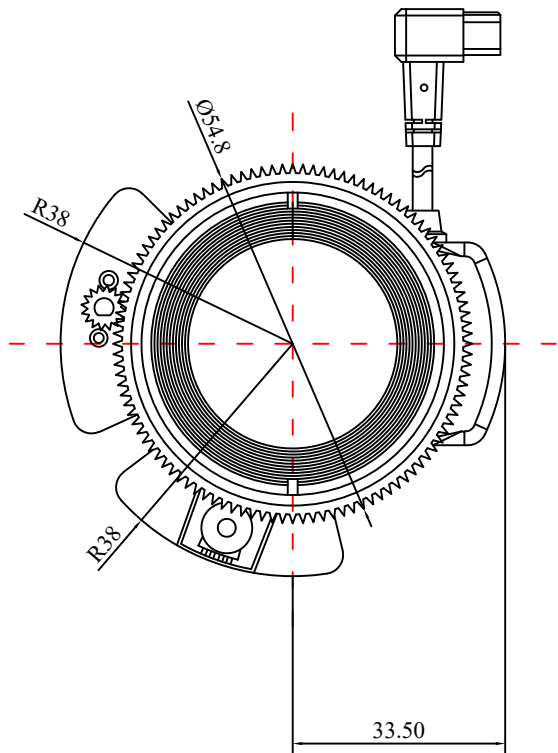
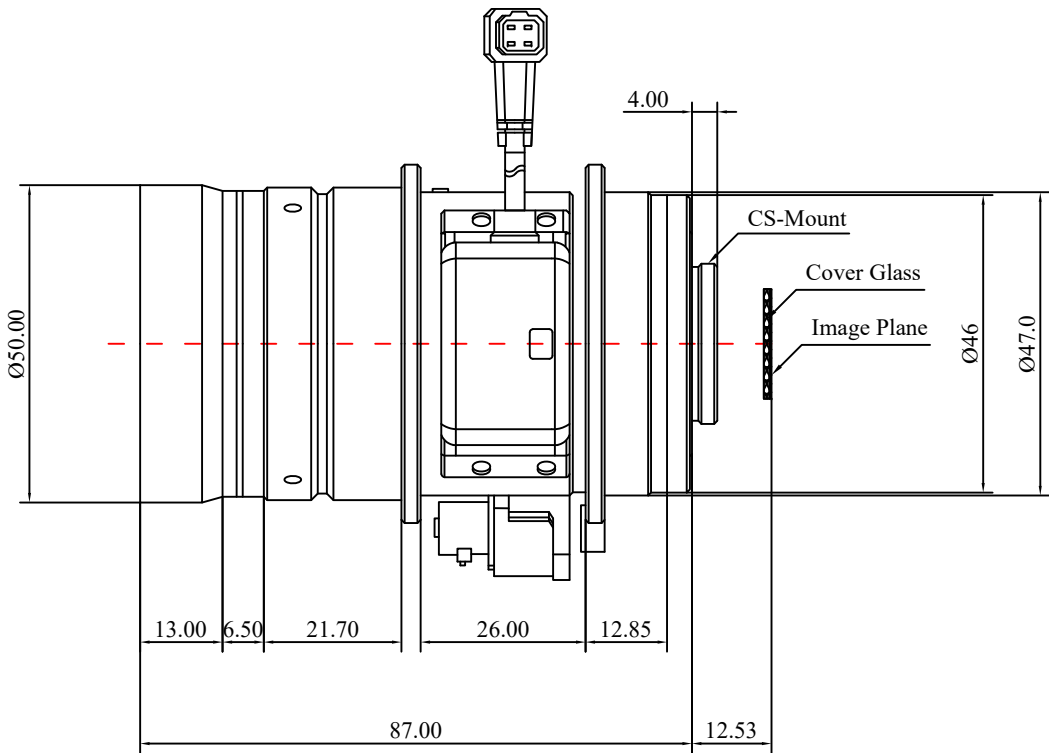


1	Type		Vari-Focal Lens				
2	Resolution		8MP				
3	Image Format		1/1.7"				
4	Image Circle		φ9.5mm(MAX)				
5	EFL		11~50mm				
6	F/NO.		F1.4				
7	FFL (M)		>6.95mm				
8	BFL (O)		>8.26mm				
9	For Sensor	1/1.7"(4:3)	1/1.7"(16:9)		1/2"(4:3)		
10	F.O.V (H*V*D)	W	T	W	T	W	T
11		27.2°	8.8°	38.1°	9°	31.2°	7.5°
12		36.9°	6.6°	21°	5.1°	23.1°	5.6°
13		47°	10.9°	44.2°	10.4°	39.5°	9.4°
14	Coating Range		400-900nm				
15	OPT Distortion		-10.7~0.07%(1/1.7")				
16	Relative Ill.		---				
17	Chief Ray Angle		---				
18	M.O.D		1.5m~∞				
19	Mount Type		CS-Mount				
20	Dimension Figure		φ50.0*L87.0mm				
21	IR Correction		Yes				
22	Waterproof		No				
23	Weight		267g				
24	Iris Operation		P-Iris				
25	Zoom Operation		Motorized				
26	Focus Operation		Motorized				
27	Operating Temperature		-25° ~+85°				
28	Storage Temperature		-25° ~+85°				



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2024-01-11	CH3693A Rev1.0		
	4:1	X.0	±0.15			
Units	X.00	±0.10	Design	Linda	2020-03-26	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2020-04-20	
mm	Angle	±0.5°	Approval	Sanmu	2020-05-13	