


1	Type	Low Distortion Lens			
2	Resolution	5MP			
3	Image Format	1/1.8"			
4	Image Circle	φ9.0mm(MAX)			
5	EFL	6mm			
6	TTL	23.11mm			
7	F/NO.	F2.8			
8	FFL (M)	6.96mm			
9	BFL (O)	7.56mm			
10	For Sensor	1/1.8"	1/2.5"	1/2.7"	
11	F.O.V	Horizontal	60°	49.8°	47.4°
12		Vertical	40°	38.7°	31.0°
13		Diagonal	78°	60°	54.5°
14	TV Distortion	<-0.82%	<-0.80%	<-0.78%	
15	Relative Ill.	>74.8%	>83%	>86%	
16	Chief Ray Angle	<11.1°	<9.5°	<8.6°	
17	M.O.D	0.1m~∞			
18	Mount Type	M12*P0.5			
19	Dimension Figure	φ16.0*L16.41mm			
20	Lens Structure	5E			
21	IR-Filter	T=50%&IR650±10nm			



22	Weight	---	Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
23	Iris Operation	Fixed		4: 1	X	± 0.2	2021-10-20	CH3755AB Rev1.0	
24	Zoom Operation	Fixed	Units		X.0	± 0.15			
25	Focus Operation	Manual		mm	X.00	± 0.10	Design	Linda	2021-09-17
26	Operating Temperature	-15° ~+65°	X.000		± 0.001	Checked	Anna	2021-10-18	
27	Storage Temperature	-15° ~+65°	Angle		± 0.5°	Approval	Sanmu	2021-10-23	

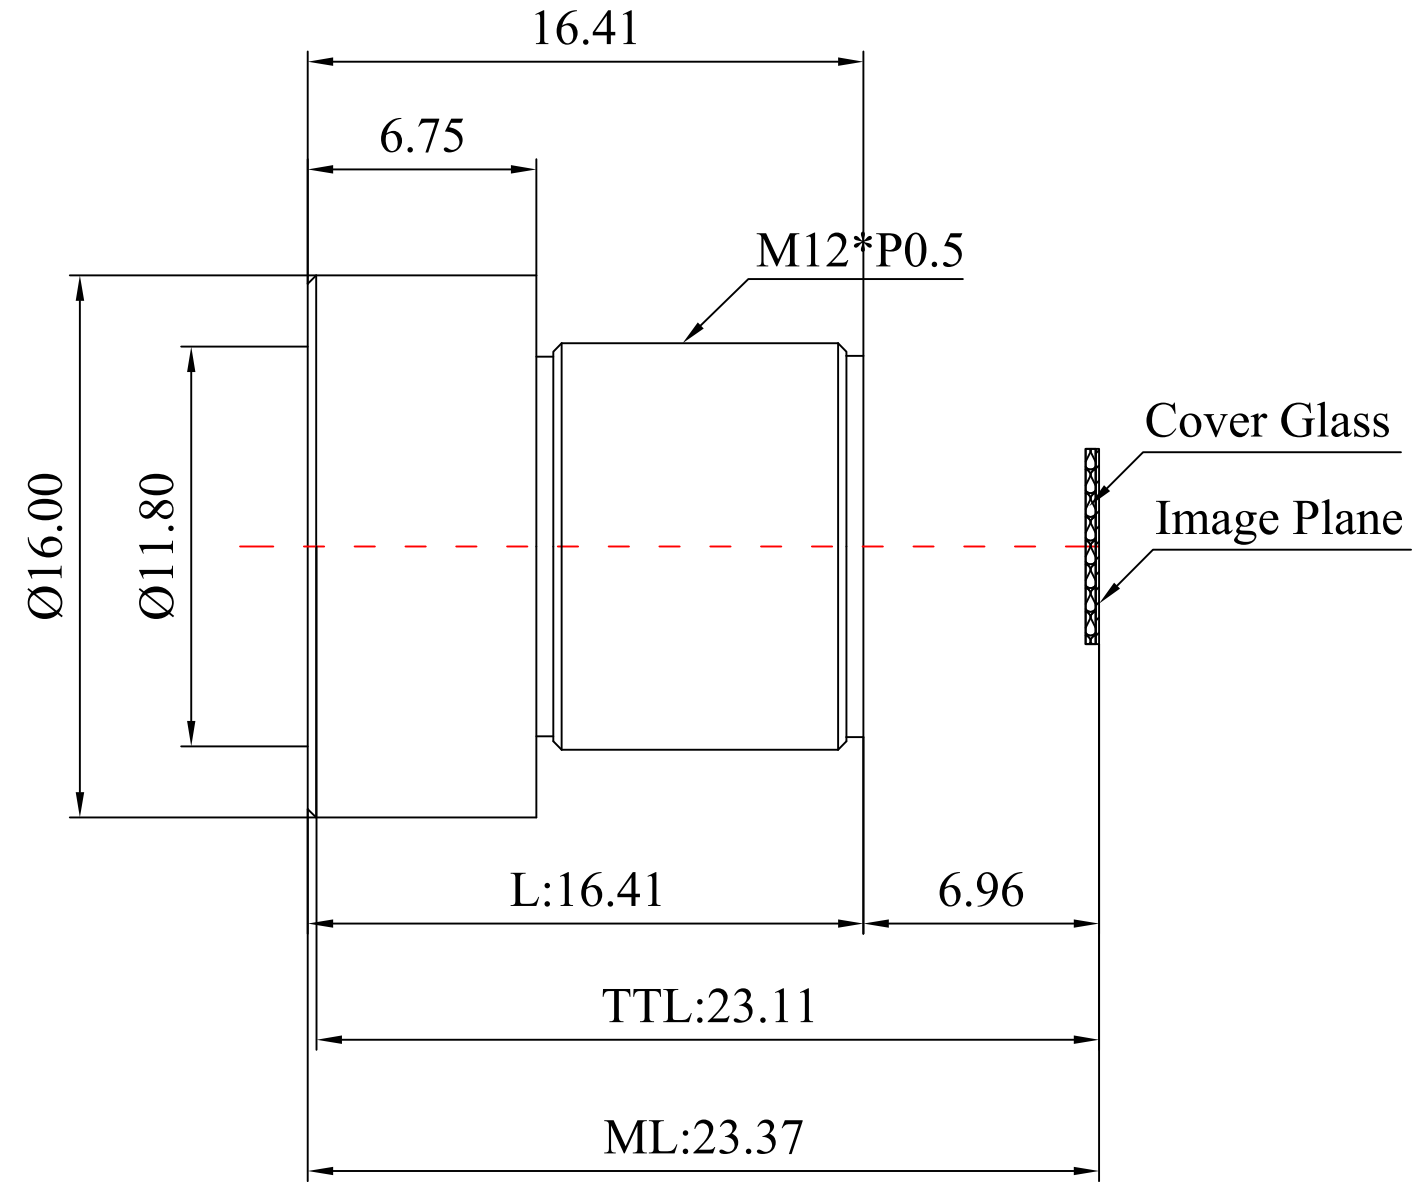