
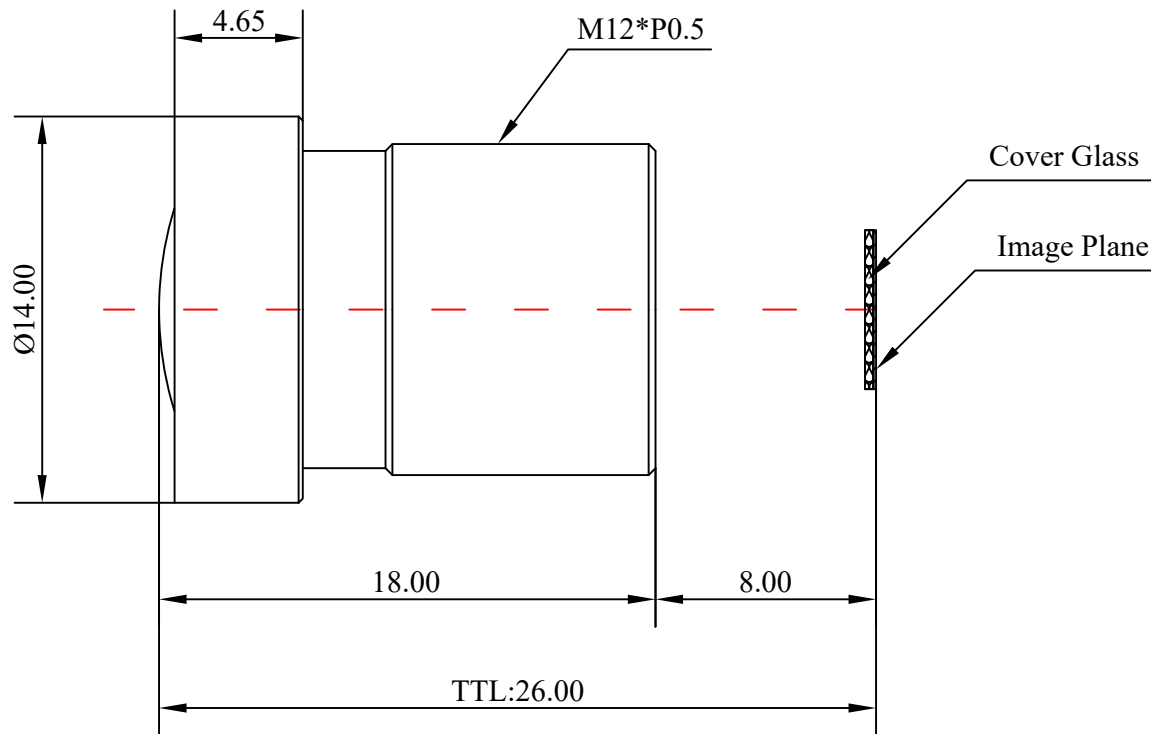


1	Type		Low Distortion Lens		
2	Resolution		16MP		
3	Image Format		1/1.8"		
4	Image Circle		φ9.2mm(MAX)		
5	EFL		12mm		
6	TTL		26.00mm		
7	F/NO.		5.6		
8	FFL (M)		8.00mm		
9	BFL (O)		9.86mm		
10	For Sensor		1/1.8"	1/2.3"	1/2.8"
11	F.O.V	Horizontal	35°	28.8°	26.1°
12		Vertical	20.4°	21.6°	14.8°
13		Diagonal	40°	35.4°	29.6°
14	OPT Distortion		<-0.01%		
15	Relative Ill.		>80%		
16	Chief Ray Angle		<14°		
17	M.O.D		0.1m~∞		
18	Mount Type		M12*P0.5		
19	Dimension Figure		φ14.00*L18.00mm		
20	Lens Structure		6G		
21	IR-Filter		Non-IR		
22	Waterproof		No		
23	Weight		5.6g		
24	Iris Operation		Fixed		
25	Zoom Operation		Fixed		
26	Focus Operation		Manual		
27	Operating Temperature		-45° ~+85°		
28	Storage Temperature		-45° ~+85°		



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2025-01-16	CH3773B Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2024-11-13	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2024-11-26	
mm	Angle	±0.5°	Approval	Sanmu	2022-12-05	