
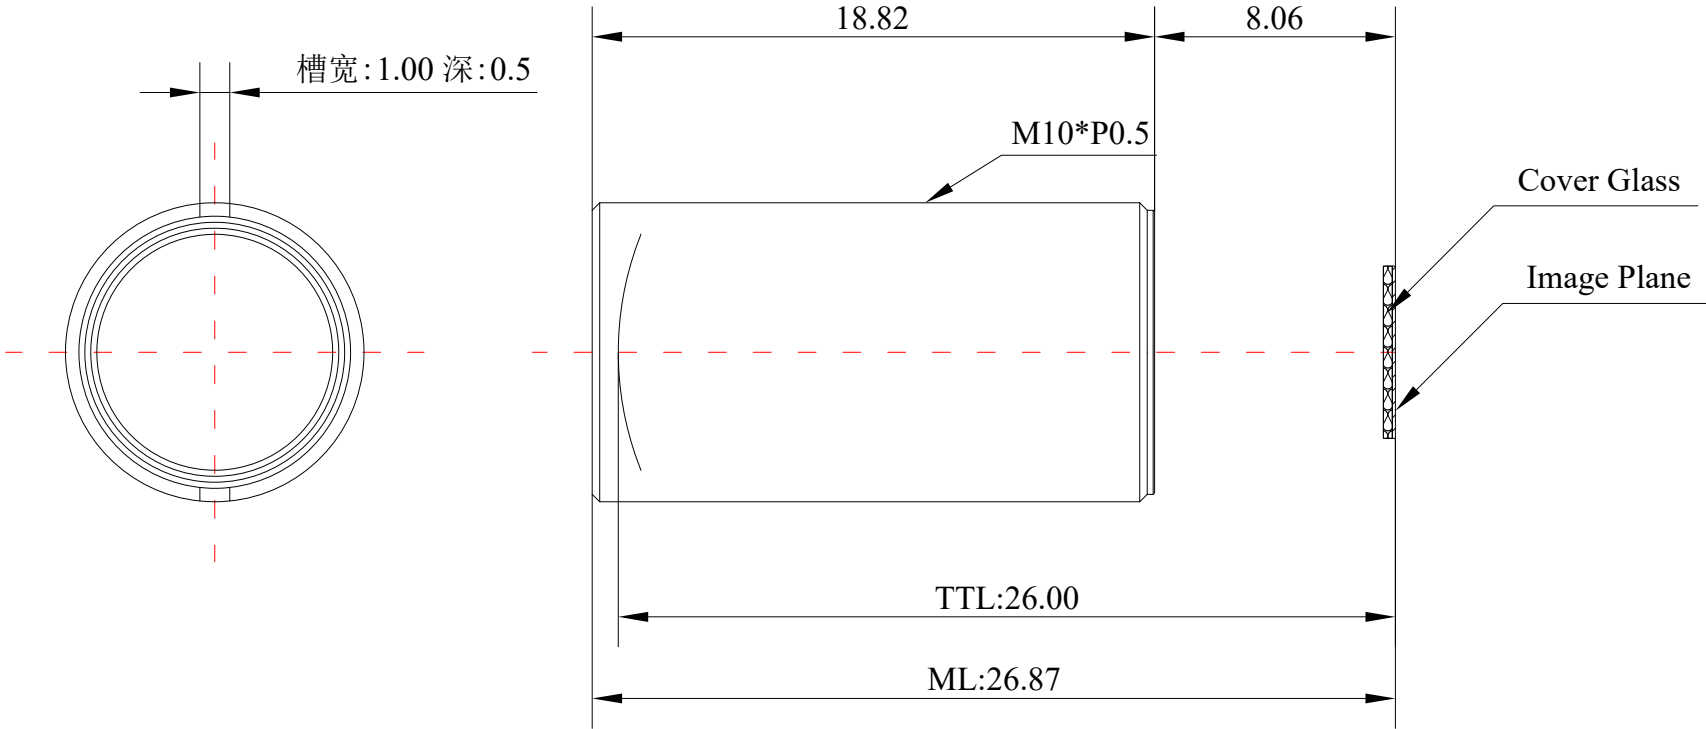


1	Type		Low Distortion Lens
2	Resolution		8MP
3	Image Format		1/2.5"
4	Image Circle		φ7.4mm(MAX)
5	EFL		12mm
6	TTL		26.00mm
7	F/NO.		F5.6
8	FFL (M)		8.06mm
9	BFL (O)		9.86mm
10	For Sensor		IMX274
11	F.O.V	Horizontal	28.7°
12		Vertical	16.4°
13		Diagonal	32.7°
14	OPT Distortion		<-0.01%
15	Relative Ill.		>80%
16	Chief Ray Angle		<14°
17	M.O.D		0.1m~∞
18	Mount Type		M10*P0.5
19	Dimension Figure		φ10.00*L18.82mm
20	Lens Structure		6G
21	IR-Filter		IR650nm
22	Waterproof		No
23	Weight		6.0g
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-45° ~+85°
28	Storage Temperature		-45° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2026-05-19	CH3773HA Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2024-11-13	 3D Angle Projection
mm	X.000	±0.001	Checked	Anna	2024-11-26	
	Angle	±0.5°	Approval	Sanmu	2022-12-05	