
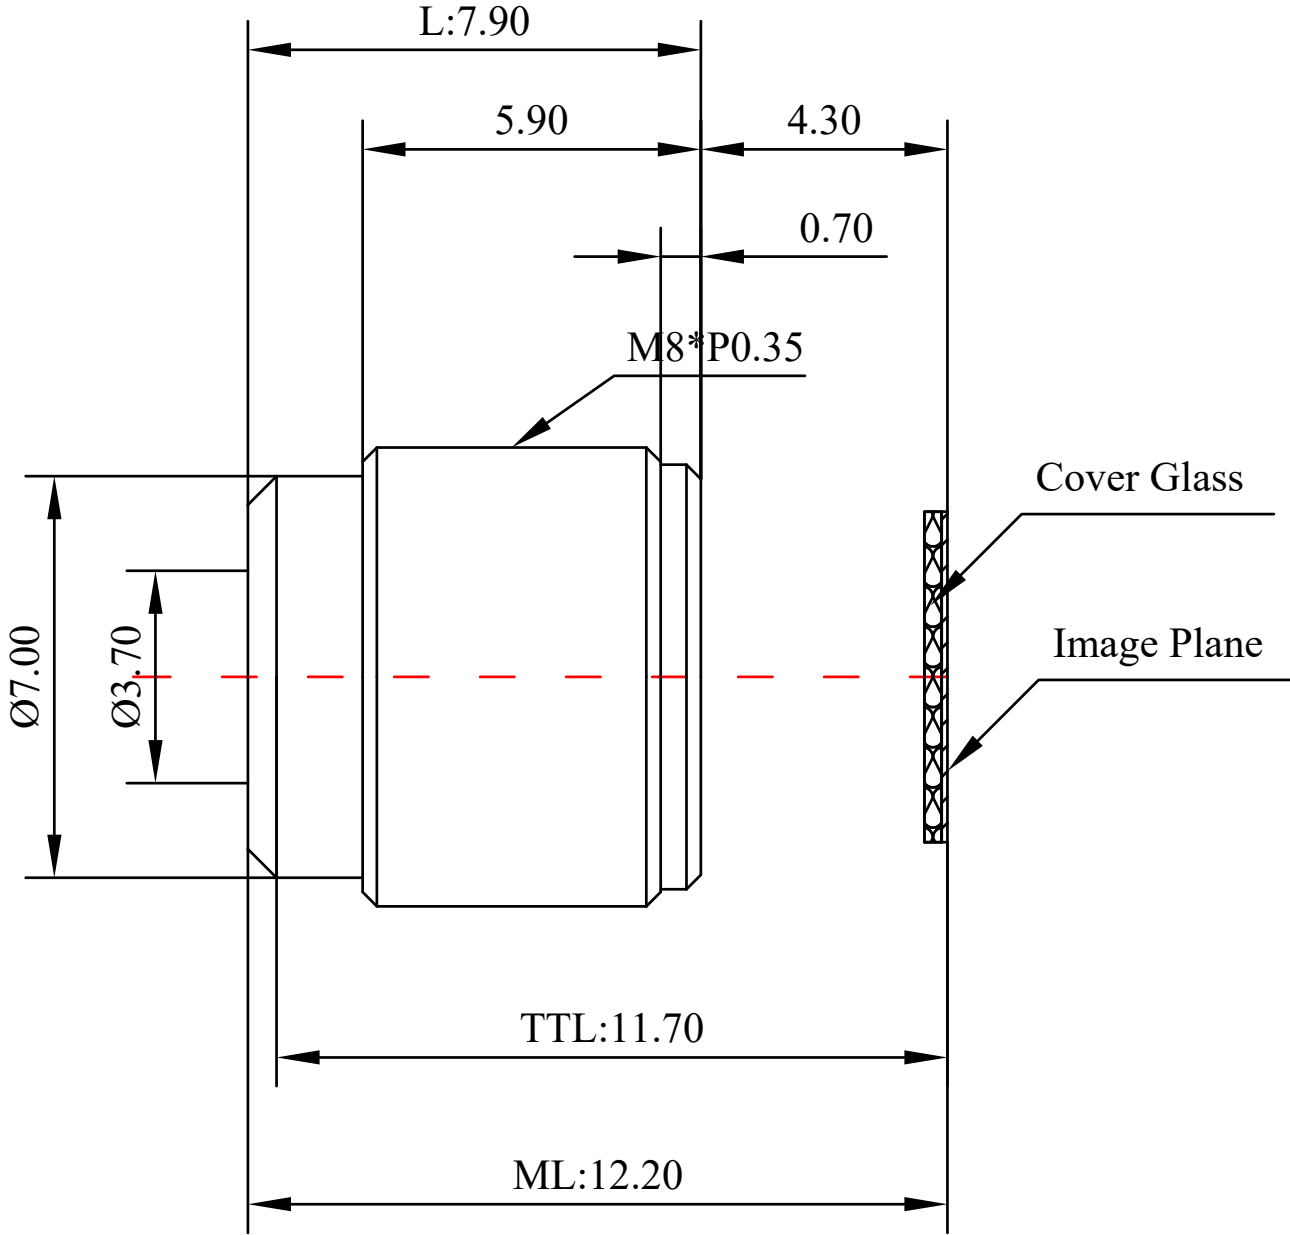


1	Type		M8 Lens
2	Resolution		MP
3	Image Format		1/2.5"
4	Image Circle		φ6.5mm(MAX)
5	EFL		7.5mm
6	TTL		11.70mm
7	F/NO.		F2.8
8	FFL (M)		4.30mm
9	BFL (O)		5.00mm
10	For Sensor		1/2.5"
11	F.O.V	Horizontal	40.6°
12		Vertical	31.2°
13		Diagonal	49.6°
14	OPT Distortion		<-1.7%
15	Relative Ill.		>57%
16	Chief Ray Angle		<20.6°
17	M.O.D		0.1m~∞
18	Mount Type		M8*P0.35
19	Dimension Figure		φ8.00*L7.90mm
20	Lens Structure		6G
21	IR-Filter		IR650nm
22	Waterproof		No
23	Weight		---
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-20° ~+85°
28	Storage Temperature		-20° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2023-07-19	CH3901AB Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2023-05-23	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2023-06-06	
mm	Angle	±0.5°	Approval	Sanmu	2023-06-29	