


1	Type	Low Distortion Lens	
2	Resolution	8MP	
3	Image Format	2/3"	
4	Image Circle	Ø11.4mm(MAX)	
5	EFL	6.5mm	
6	TTL	30.15mm	
7	F/NO.	F5.6	
8	FFL (M)	2.50mm	
9	BFL (O)	3.40mm	
10	For Sensor	2/3"	
11	F.O.V	Horizontal	67.2°
12		Vertical	58.1°
13		Diagonal	81.2°
14	OPT Distortion	<-1.7%	
15	Relative Ill.	>42%	
16	Chief Ray Angle	<20°	
17	M.O.D	0.1m~∞	
18	Mount Type	M16*P0.5	
19	Dimension Figure	Ø25.0*L27.77mm	
20	Lens Structure	10G	
21	IR-Filter	IR650nm	
22	Waterproof	No	
23	Weight	/	
24	Iris Operation	Fixed	
25	Zoom Operation	Fixed	
26	Focus Operation	Manual	
27	Operating Temperature	-25° ~+85°	
28	Storage Temperature	-25° ~+85°	



Scale	Remark	Tolerances	Date	Revsied		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4: 1	X	±0.2	2026-04-02	CH3906LB Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2025-07-08	
	X.000	±0.001	Checked	Anna	2025-09-21	
mm	Angle	±0.05°	Approval	Sanmu	2025-10-25	

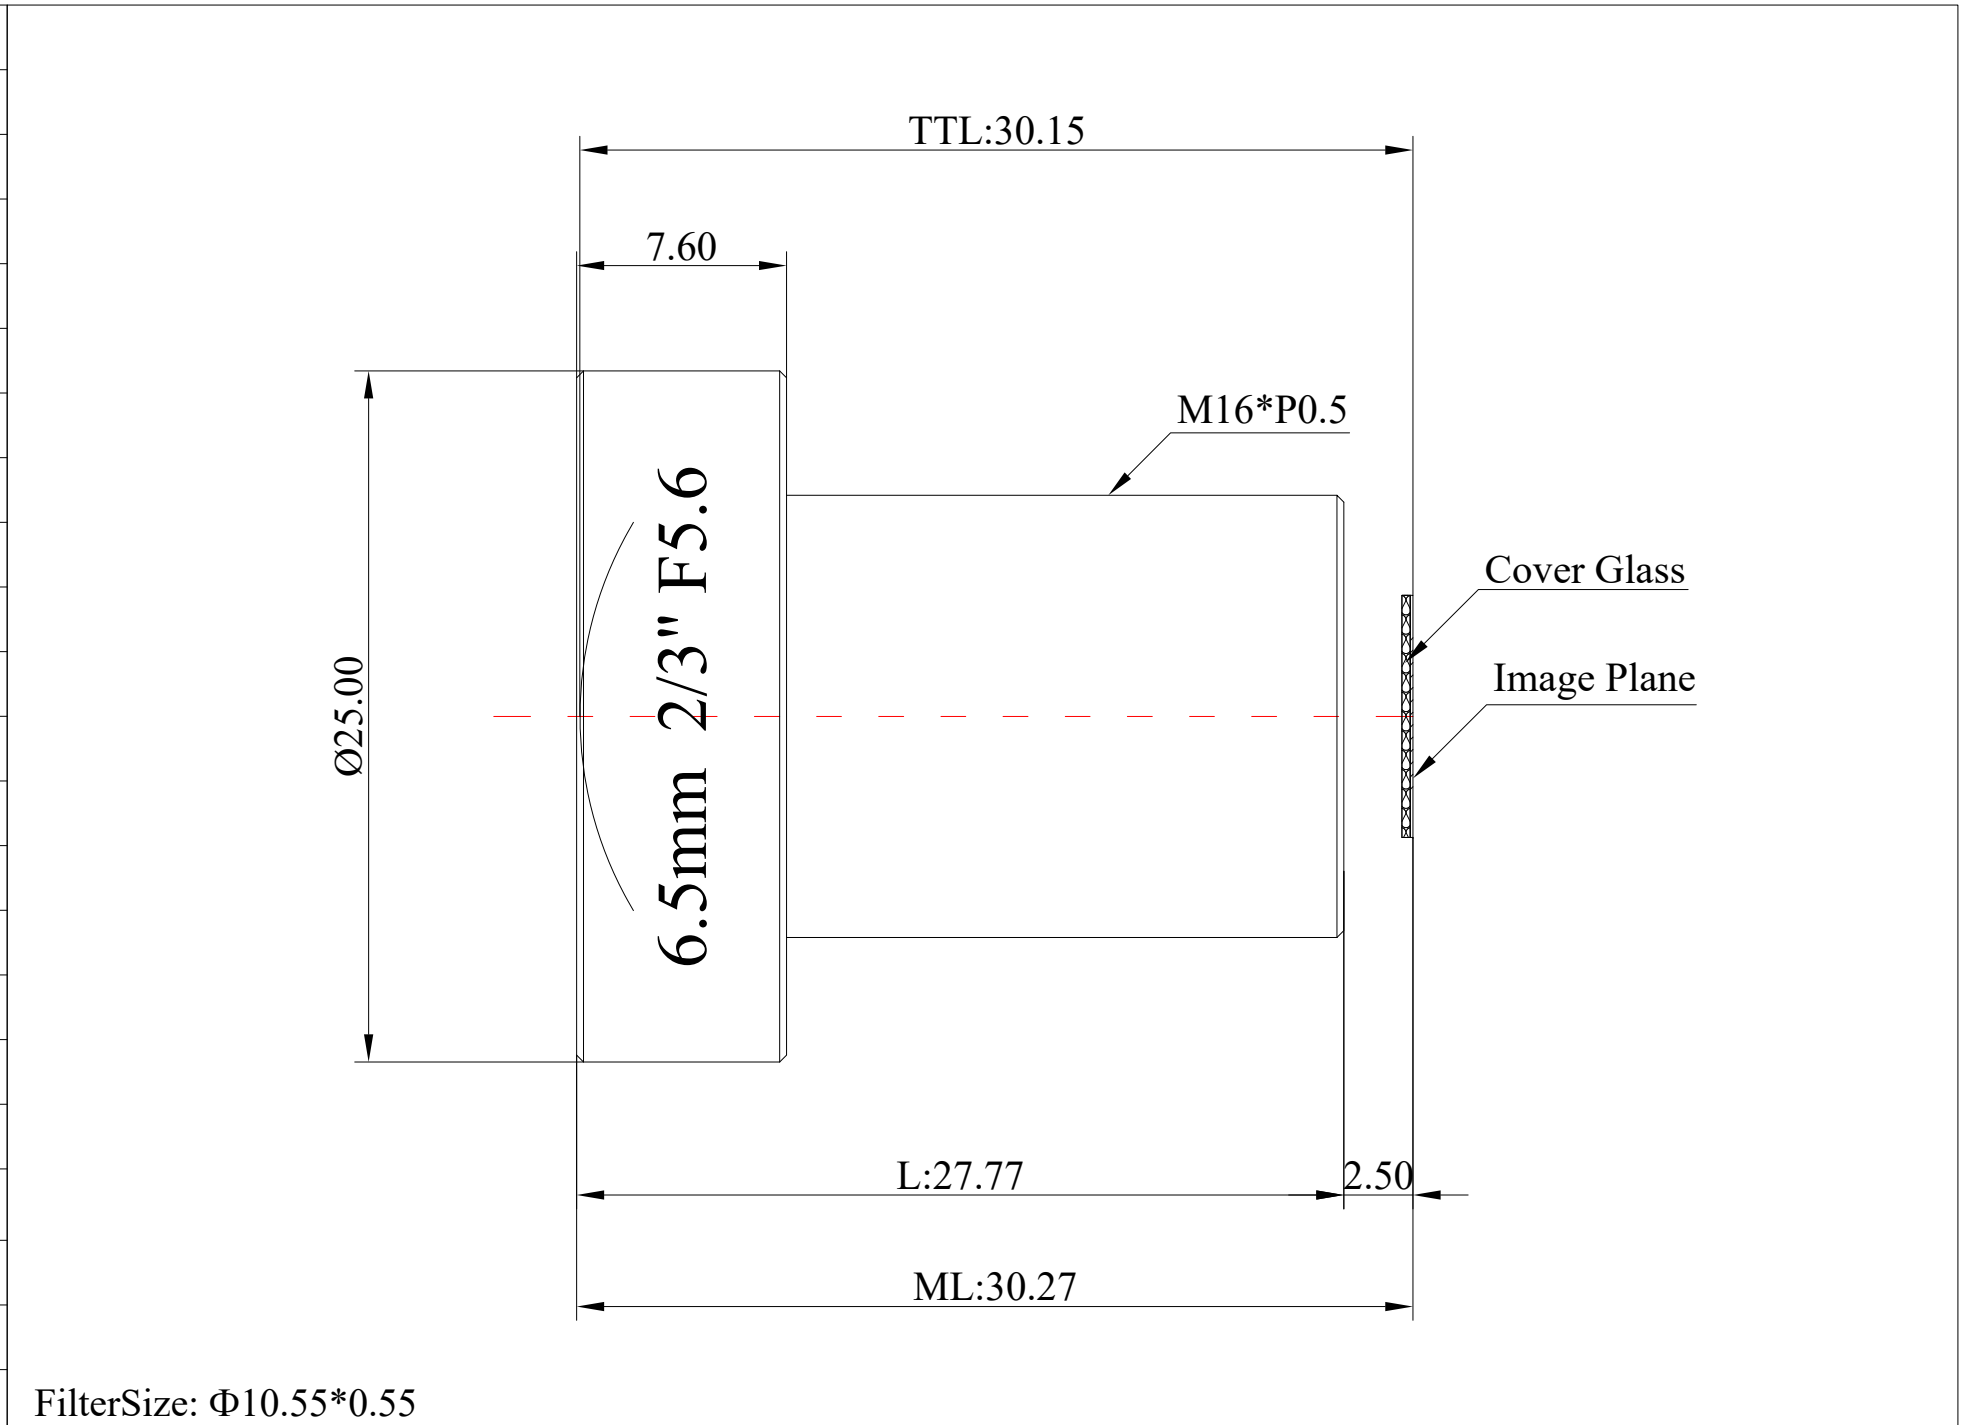