


1	Type	M12 Lens			
2	Resolution	10MP			
3	Image Format	2/3"			
4	Image Circle	φ10.7mm(MAX)			
5	EFL	12mm			
6	TTL	16.48mm			
7	F/NO.	F2.5			
8	FFL (M)	6.30mm			
9	BFL (O)	6.53mm			
10	For Sensor	2/3"	1/2"	1/3"	
11	F.O.V	Horizontal	40.6°	29.86°	22.62°
12		Vertical	31°	22.62°	17.06°
13		Diagonal	49.8°	36.87°	28.07°
14	TV Distortion	<-1.0%			
15	Relative Ill.	>67%			
16	Chief Ray Angle	<21.1°			
17	M.O.D	0.1m~∞			
18	Mount Type	M12*P0.5			
19	Dimension Figure	φ14.00*L11.80mm			
20	Lens Structure	6G			
21	IR-Filter	Non-IR			
22	Waterproof	No			
23	Weight	3.2g			
24	Iris Operation	Fixed			
25	Zoom Operation	Fixed			
26	Focus Operation	Manual			
27	Operating Temperature	-20° ~+85°			
28	Storage Temperature	-20° ~+85°			



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2017-04-15	CH3908A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2017-03-23	
	X.000	±0.001	Checked	Anna	2017-04-12	
mm	Angle	±0.5°	Approval	Sanmu	2017-04-13	

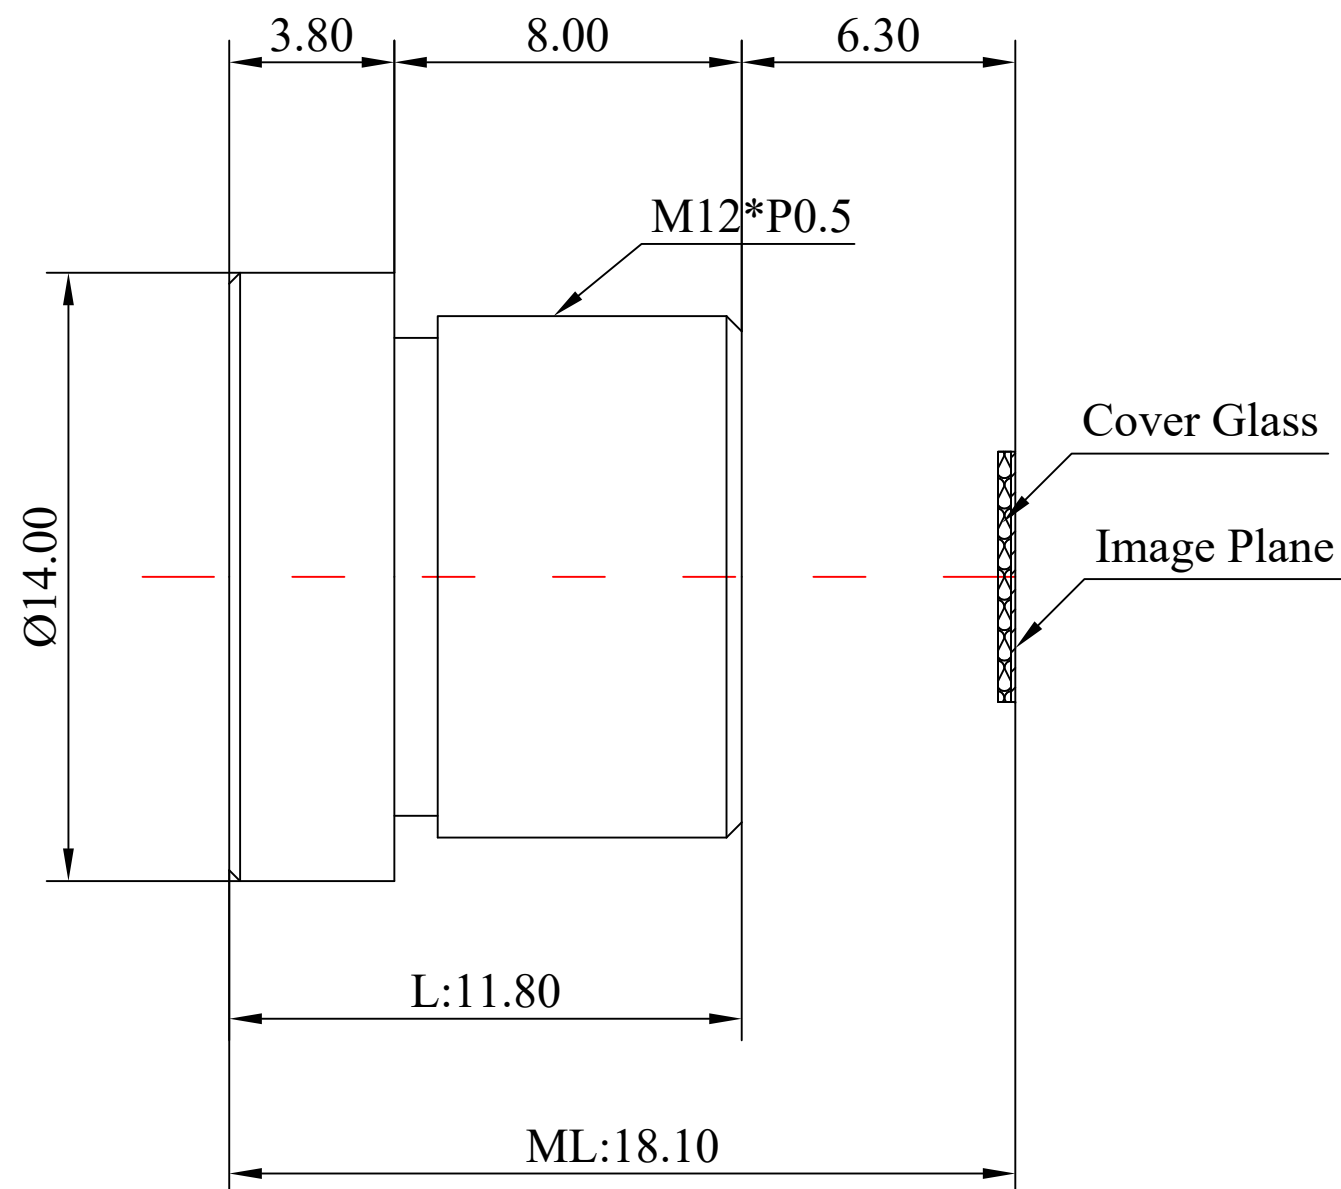