


1	Type	M12 Lens			
2	Resolution	5MP			
3	Image Format	2/3"			
4	Image Circle	φ10.6mm(MAX)			
5	EFL	50mm			
6	TTL	37.70mm			
7	F/NO.	2.8			
8	FFL (M)	5.50mm			
9	BFL (O)	7.26mm			
10	For Sensor	2/3"	1/2"	1/3"	
11	F.O.V	Horizontal	10.06°	7.32°	5.49°
12		Vertical	7.55°	5.49°	4.12°
13		Diagonal	12.56°	9.15°	6.86°
14	TV Distortion	<-1.0%			
15	Relative Ill.	>50%			
16	Chief Ray Angle	<18°			
17	M.O.D	0.5m~∞			
18	Mount Type	M12*P0.5			
19	Dimension Figure	φ22.00*L32.20mm			
20	Lens Structure	6G			
21	IR-Filter	Non-IR			
22	Waterproof	No			
23	Weight	14g			
24	Iris Operation	Fixed			
25	Zoom Operation	Fixed			
26	Focus Operation	Manual			
27	Operating Temperature	-20° ~+85°			
28	Storage Temperature	-20° ~+85°			



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
2.5:1	X	±0.2	2017-07-08	CH175A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2017-06-16	
	X.000	±0.001	Checked	Anna	2017-09-03	
mm	Angle	±0.5°	Approval	Sanmu	2017-09-05	

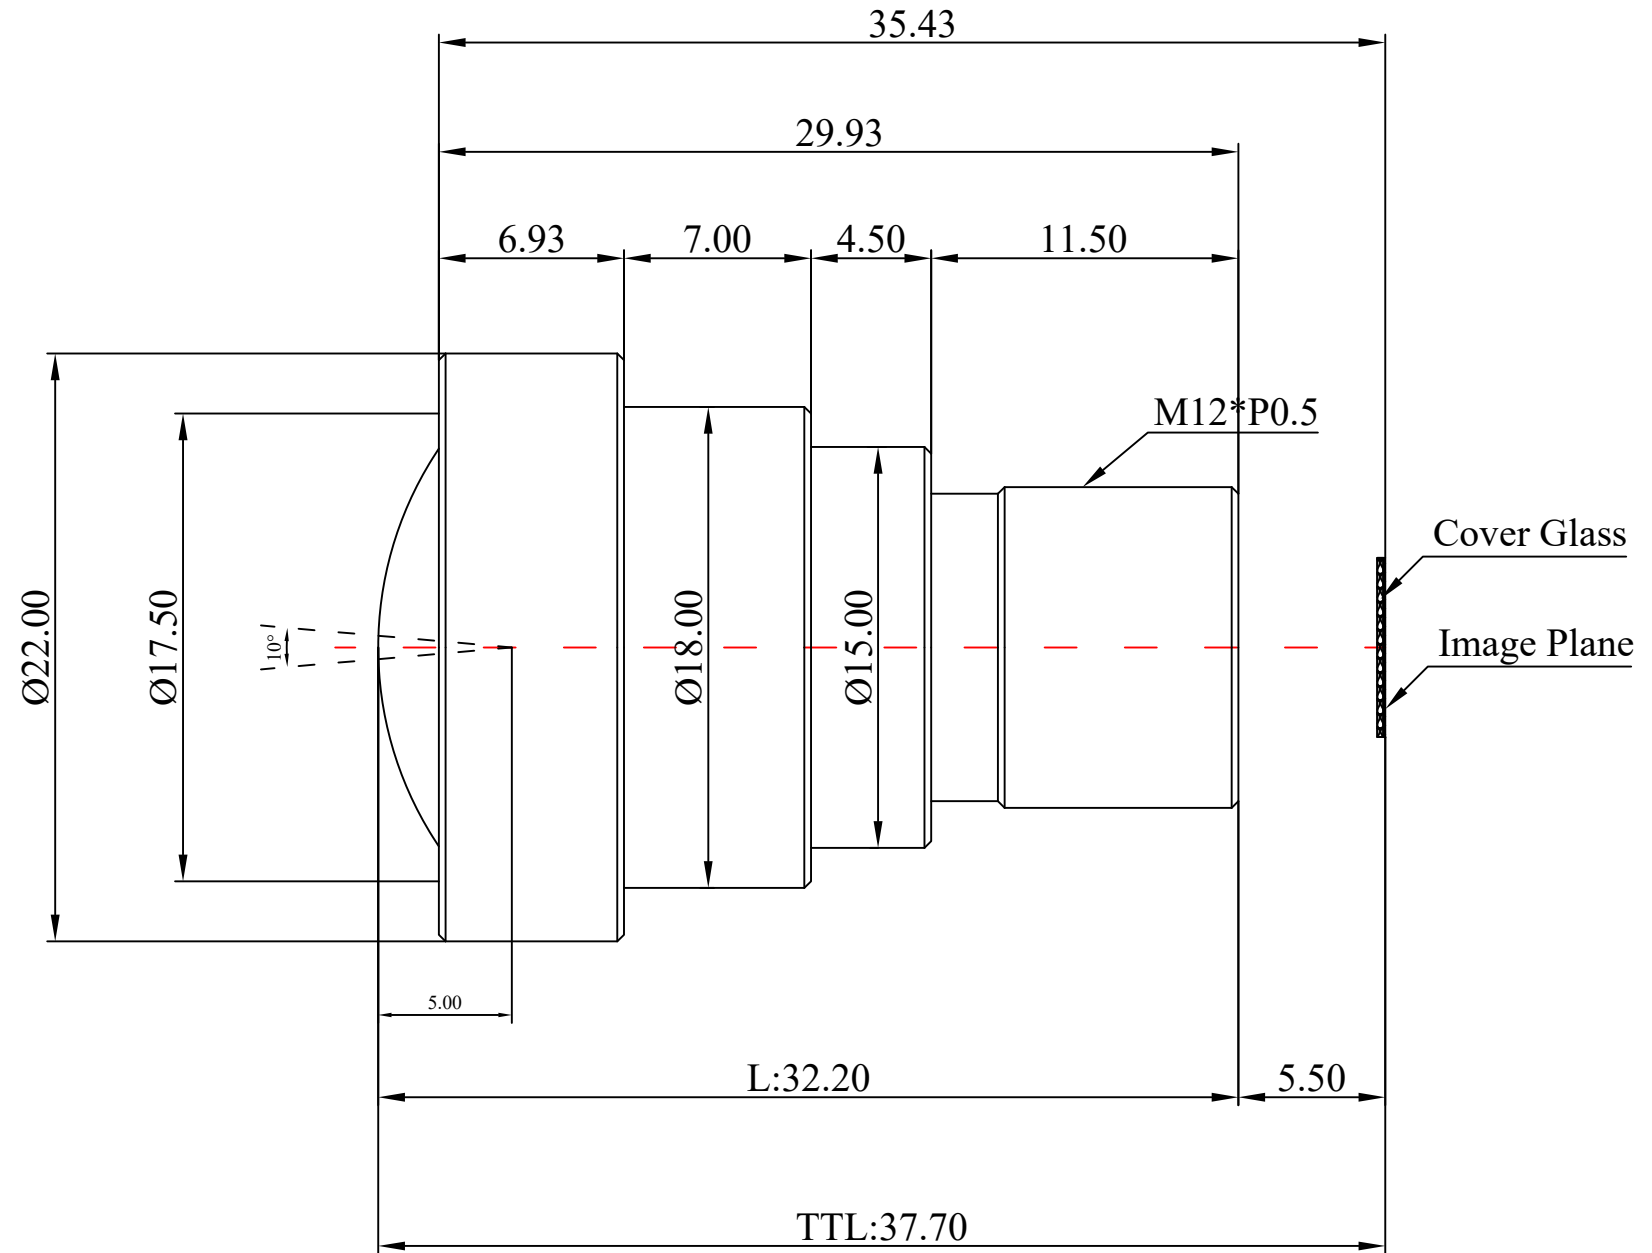