
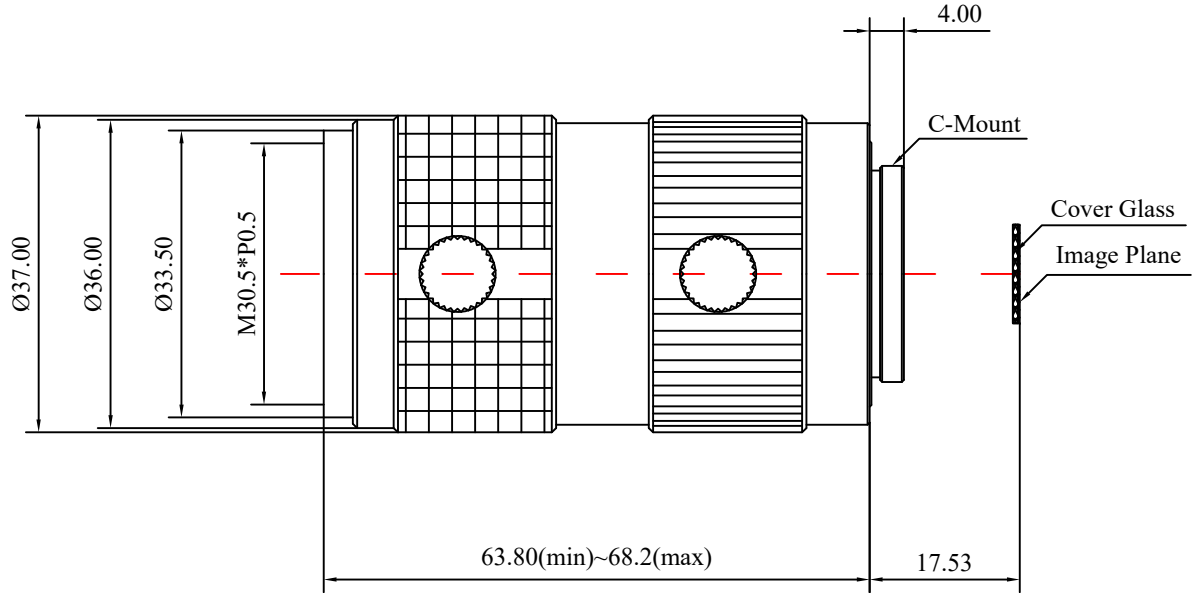


EFL		25mm	
F/No.		F2.8-22	
For Sensor		1.1" 14.1x10.6mm	1" 12.8x9.6mm
		2/3" 8.8x6.6mm	
F.O.V	H	31.6°	28.8°
	V	24.2°	22.1°
	D	38.6°	35.4°
Object Dimension at 450mm	H	255.9mm	232.3mm
	V	192.4mm	174.2mm
	D	319.4mm	290.4mm
TV Distortion		<0.1%	<0.01%
M.O.D		0.1m~∞	
FFL		17.53mm	
BFL		13.5mm	
Filter Size		M30.5*P0.5	
Mount Type		C-Mount	
Operating Temperature		-20°C~+85°C	
Storage Temperature		-20°C~+85°C	
Working Distance(mm)	Optical Magnification	1.1" F.O.V H*V(mm)	
5000	0.005X	2820	2120
2000	0.0125X	1128	848
1000	0.0249X	566.3	425.7
900	0.0276X	510.8	384
800	0.0311X	453.4	340.8
700	0.0355X	397.2	298.6
600	0.0414X	340.6	256
550	0.0451X	312.6	235
500	0.050X	282	212
450	0.0551X	255.9	192.4
400	0.0619X	278.8	171.2
350	0.0706X	199.7	150.1
300	0.0822X	171.5	128.9
250	0.0984X	143.3	107.7
200	0.1225X	115.1	86.5
150	0.162X	87	65.4
100		58.8	44.1



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	4:1	X	±0.2	2024-04-07	CH666A Rev1.0	
Units	X.0	±0.15				 3D Angle Projection
	X.00	±0.10	Design	Linda	2024-01-02	
mm	X.000	±0.001	Checked	Anna	2024-02-01	
	Angle	±0.5°	Approval	Sanmu	2024-03-18	