
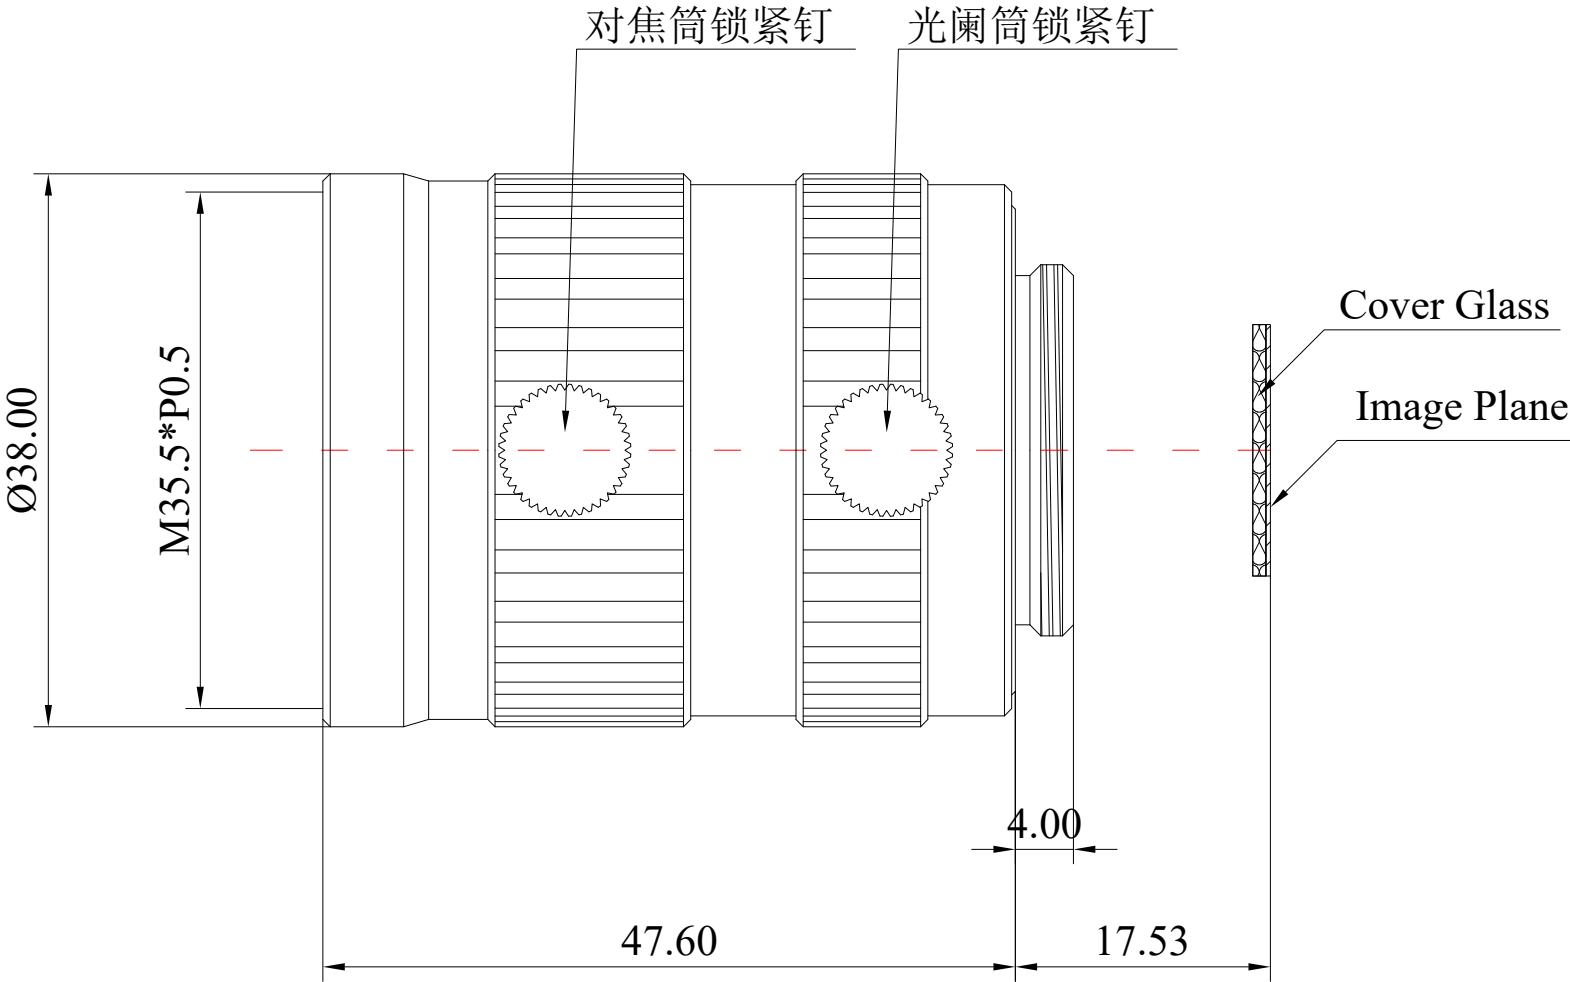


EFL		35mm		
F/No.		F2.8-22		
For Sensor		4/3"	1"	2/3"
F.O.V	H	27.9°	20.6°	14.3°
	V	20.9°	15.45°	10.7°
	D	34.9°	25.75°	17.86°
Object Dimension at 200mm	H	97.7mm	71mm	48.8mm
	V	73.3mm	53.3mm	36.6mm
	D	122.16mm	88.8mm	88.8mm
TV Distortion		<0.04%	<0.02%	<0.01%
M.O.D		0.2m		
FFL		17.526mm		
BFL		22.9mm		
Filter Size		M35.5*P0.5		
Front/ Rear Effective Dia		Ø23mm/Ø19.1mm		
Mount Type		C-Mount		
Operating Temperature		-20°C~+85°C		
Storage Temperature		-20°C~+85°C		
Working Distance(mm)	Optical Magnificationi	4/3" F.O.V (H*V mm)		
5000	0.0069X	2560.8	1923.0	
2000	0.0174X	1010.5	759.1	
1000	0.0349X	627.8	378	
900	0.0388X	452.6	339.9	
800	0.0437X	401.9	301.8	
700	0.05X	351.2	263.7	
600	0.0585X	300.6	225.6	
550	0.0639X	275.3	206.6	
500	0.0703X	250	187.6	
450	0.0783X	224.7	168.7	
400	0.0882X	199.5	149.7	
350	0.101X	173.0	130.0	
300	0.1181X	149.2	111.9	
250	0.1421X	124.1	93	
200	0.1805X	97.7	73.2	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2024-05-08	CH706A Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2024-03-16	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2024-03-21	
mm	Angle	±0.5°	Approval	Sanmu	2024-04-26	