
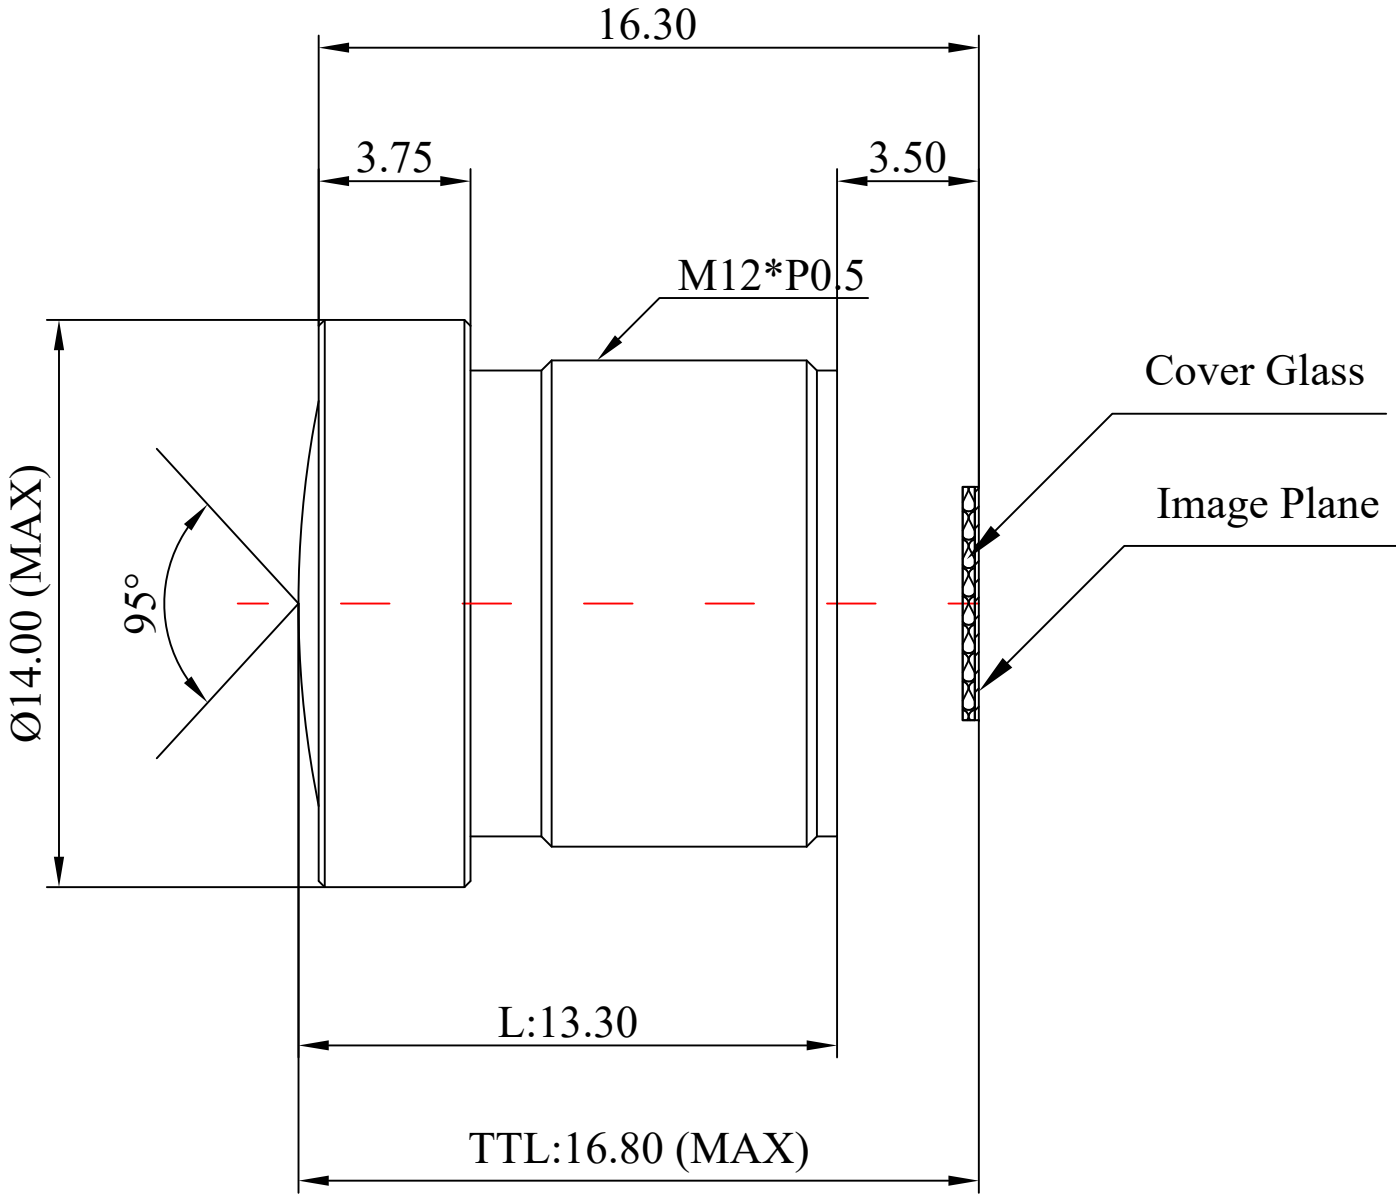


1	Type		ToF Lens
2	Resolution		MP
3	Image Format		1/2"
4	Image Circle		φ8.4mm(MAX)
5	EFL		5.3mm
6	TTL		16.80mm
7	F/NO.		1.3
8	FFL (M)		3.50mm
9	BFL (O)		3.65mm
10	For Sensor		EPC660
11	F.O.V	Horizontal	75°
12		Vertical	55°
13		Diagonal	95°
14	OPT Distortion		<-30%
15	Relative Ill.		>76%
16	Chief Ray Angle		<20°
17	M.O.D		0.3m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		φ14.00*L13.30mm
20	Lens Structure		6G
21	IR-Filter		IR850nm
22	Waterproof		No
23	Weight		---
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-25° ~+85°
28	Storage Temperature		-25° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2022-12-19	CH8048AB Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2022-12-01	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2022-12-07	
mm	Angle	±0.5°	Approval	Sanmu	2021-12-17	