
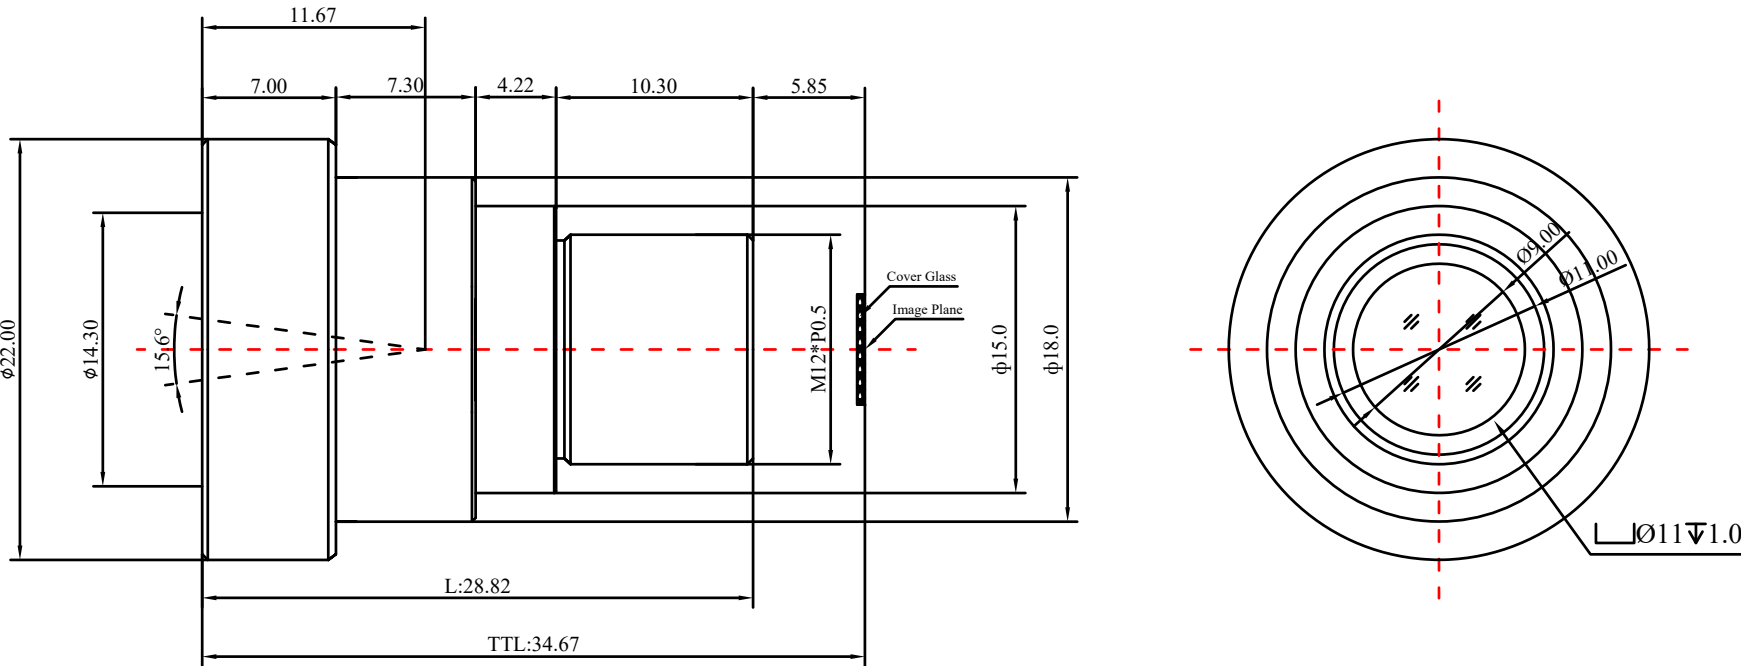


1	Type		Low Distortion Lens
2	Resolution		12MP
3	Image Format		1/1.8"
4	Image Circle		φ9.2mm(MAX)
5	EFL		35mm
6	TTL		34.67mm
7	F/NO.		F2.4
8	FFL (M)		5.85mm
9	BFL (O)		7.6mm
10	For Sensor		1/1.8"
11	F.O.V	Horizontal	11.2°
12		Vertical	10°
13		Diagonal	15.6°
14	TV Distortion		<-2%
15	Relative Ill.		>60%
16	Chief Ray Angle		<10.2°
17	M.O.D		0.3m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		Φ22.0*L28.82mm
20	Lens Structure		6G
21	IR-Filter		Non-IR
22	Waterproof		IP67
23	Weight		16.6g
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-20° ~+85°
28	Storage Temperature		-20° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2023-09-28	CH8057B Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2023-03-12	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2023-04-24	
mm	Angle	±0.5°	Approval	Sanmu	2023-05-16	