
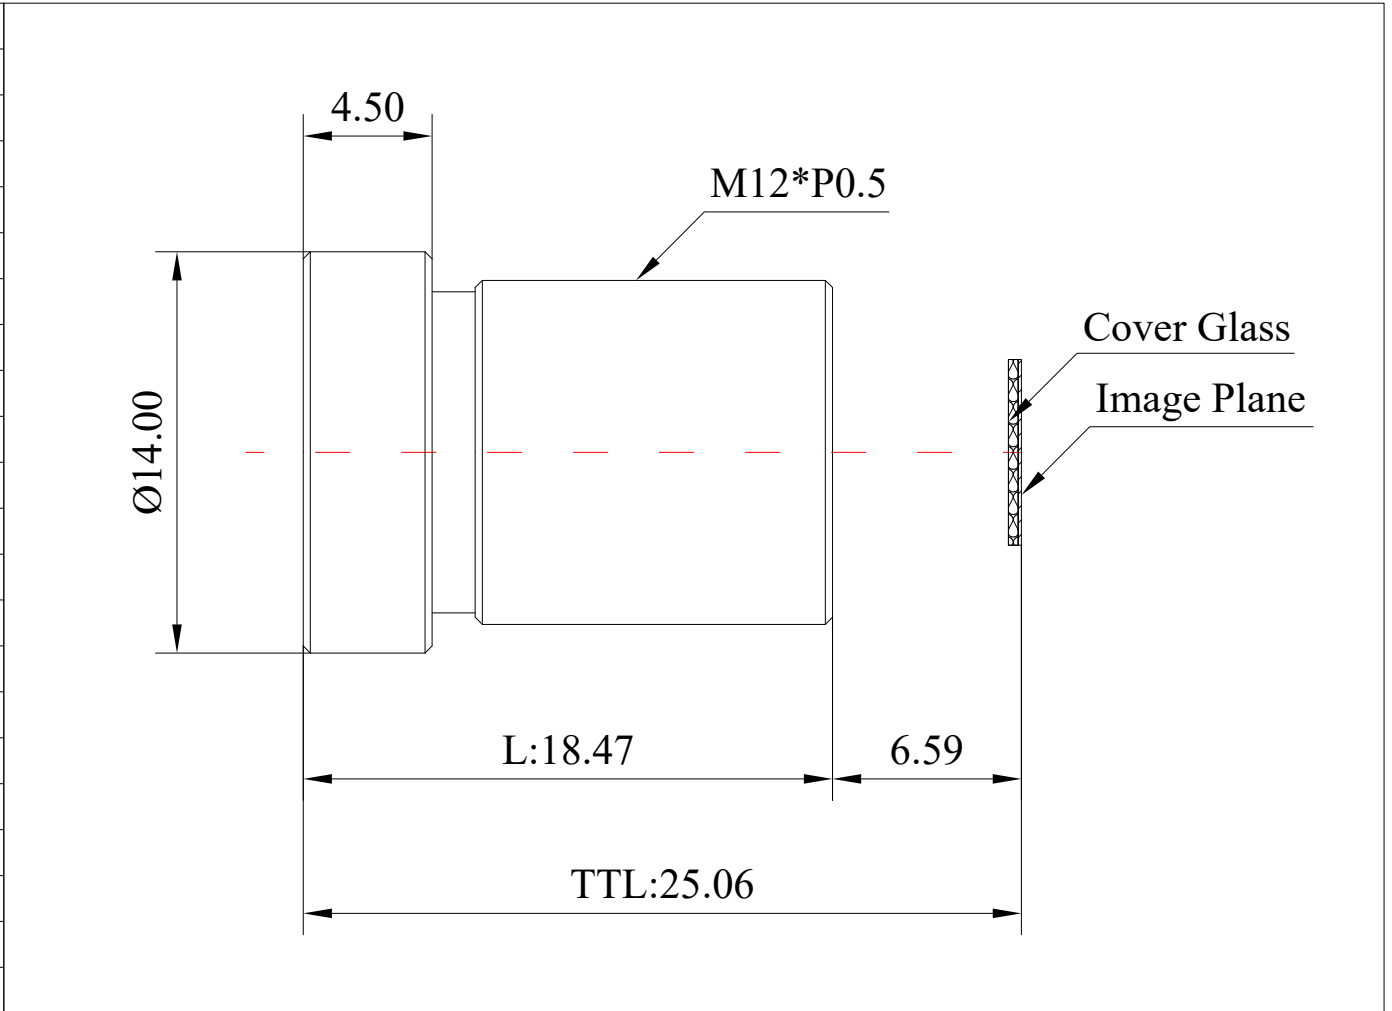


1	Type	M12 Lens	
2	Resolution	4MP	
3	Image Format	1/1.8"	
4	Image Circle	φ9.6mm(MAX)	
5	EFL	8.5mm	
6	TTL	25.06mm	
7	F/NO.	F1.6	
8	FFL (M)	6.59mm	
9	BFL (O)	7.76mm	
10	For Sensor	1/1.8"	OS04A10
11	F.O.V	Horizontal	51.6° 52.2°
12		Vertical	29.2° 29.6°
13		Diagonal	59.4° 60°
14	OPT Distortion	<-8.8%	
15	Relative Ill.	>40%	
16	Chief Ray Angle	<9.8°	
17	M.O.D	0.1m~∞	
18	Mount Type	M12*P0.5	
19	Dimension Figure	φ14.0*L18.47mm	
20	Lens Structure	7G	
21	IR-Filter	IR650nm	
22	Waterproof	No	
23	Weight	---	
24	Iris Operation	Fixed	
25	Zoom Operation	Fixed	
26	Focus Operation	Manual	
27	Operating Temperature	-25° ~+85°	
28	Storage Temperature	-25° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2024-03-18	CH8073AB Rev1.0		
Units	X.00	±0.10	Design	Linda	2024-02-27	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2024-03-11	
mm	Angle	±0.5°	Approval	Sanmu	2024-03-17	