
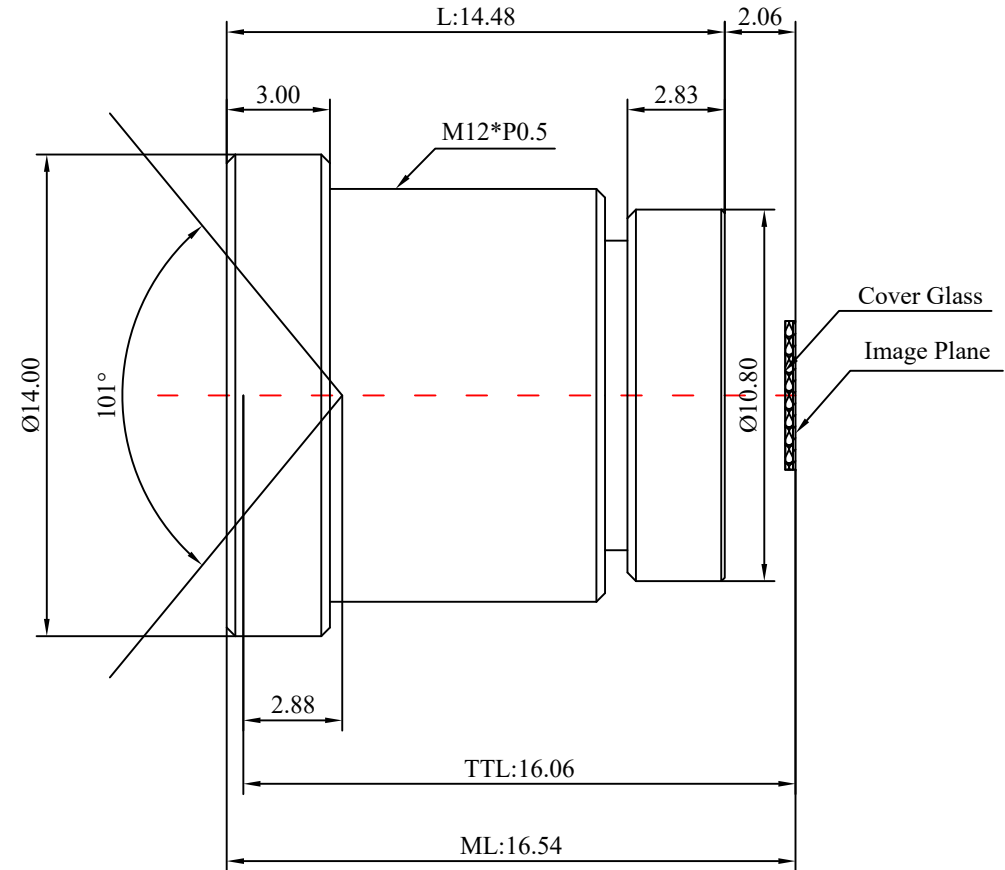


1	Type		M12 Lens
2	Resolution		8MP
3	Image Format		1/1.8"
4	Image Circle		φ9.0mm(MAX)
5	EFL		5.0mm
6	TTL		16.06mm
7	F/NO.		F2.4
8	FFL (M)		2.06mm
9	BFL (O)		2.47mm
10	For Sensor		IMX334
11	F.O.V	Horizontal	88°
12		Vertical	51°
13		Diagonal	101°
14	TV Distortion		<-10%
15	Relative Ill.		>60%
16	Chief Ray Angle		<30°
17	M.O.D		0.1m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		φ14.0*L14.48mm
20	Lens Structure		6G
21	IR-Filter		Non-IR
22	Waterproof		No
23	Weight		4.1g
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-25° ~+85°
28	Storage Temperature		-25° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2024-04-06	CH8095A Rev1.0		
	4:1	X.0	±0.15			
Units	X.00	±0.10	Design	Linda	2024-03-03	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2024-03-12	
mm	Angle	±0.5°	Approval	Sanmu	2024-04-03	