
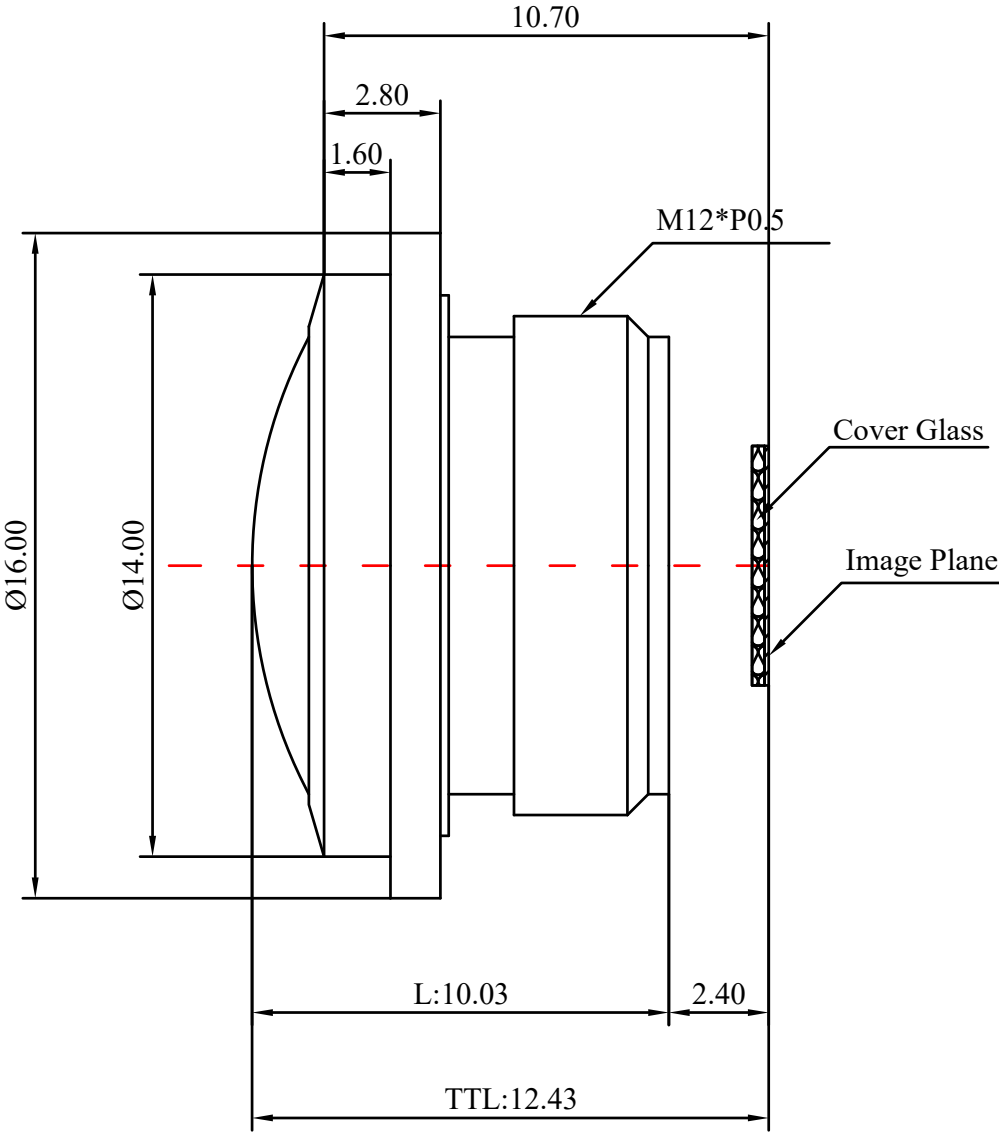


1	Type		Fisheye Lens
2	Resolution		2MP
3	Image Format		1/4"
4	Image Circle		φ4.85mm(MAX)
5	EFL		1.05mm
6	TTL		12.43mm
7	F/NO.		F1.8
8	FFL (M)		2.40mm
9	BFL (O)		2.75mm
10	For Sensor		PB030K
11	F.O.V	Horizontal	150°
12		Vertical	114°
13		Diagonal	200°
14	TV Distortion		<-43%
15	Relative Ill.		>50%
16	Chief Ray Angle		<22°
17	M.O.D		0.1m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		φ16.00*L10.03mm
20	Lens Structure		1G4P
21	IR-Filter		IR650nm
22	Waterproof		No
23	Weight		/
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-25° ~+85°
28	Storage Temperature		-25° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2025-04-17	CH8125AB Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2025-02-27	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2025-03-13	
mm	Angle	±0.5°	Approval	Sanmu	2025-04-02	