
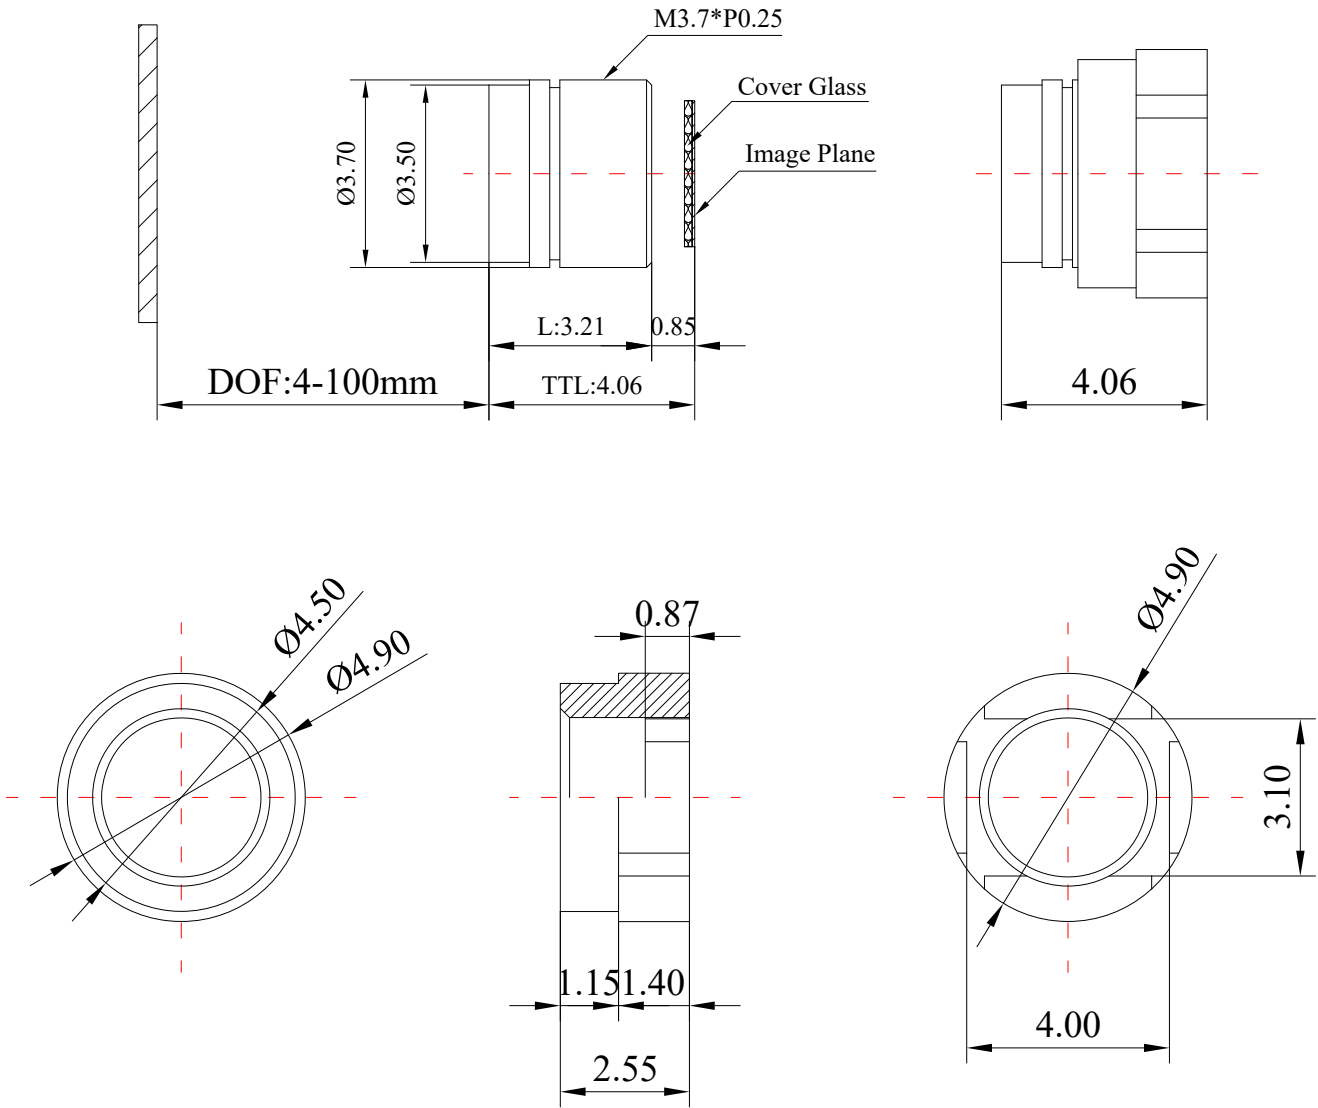


1	Type		Macro Lens
2	Resolution		MP
3	Image Format		1/6"
4	Image Circle		φ3.2mm(MAX)
5	EFL		0.75mm
6	TTL		4.06mm
7	F/NO.		F4.5
8	FFL (M)		0.85mm
9	BFL (O)		1.04mm
10	For Sensor		OV2740
11	F.O.V	Horizontal	145°
12		Vertical	84°
13		Diagonal	165°
14	TV Distortion		<-20%
15	Relative Ill.		>76%
16	Chief Ray Angle		<33°
17	M.O.D		0.05m~∞
18	Mount Type		M3.7*P0.25
19	Dimension Figure		Ø3.7*L3.21mm
20	Lens Structure		2G3P
21	IR-Filter		Non-IR
22	Waterproof		IP67
23	Weight		/
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-25° ~+85°
28	Storage Temperature		-25° ~+85°



Scale	Remark	Tolerances	Date	Revsied		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4: 1	X	±0.2	2025-09-30	CH8153A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2025-06-08	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2025-08-21	
mm	Angle	±0.05°	Approval	Sanmu	2025-08-25	