
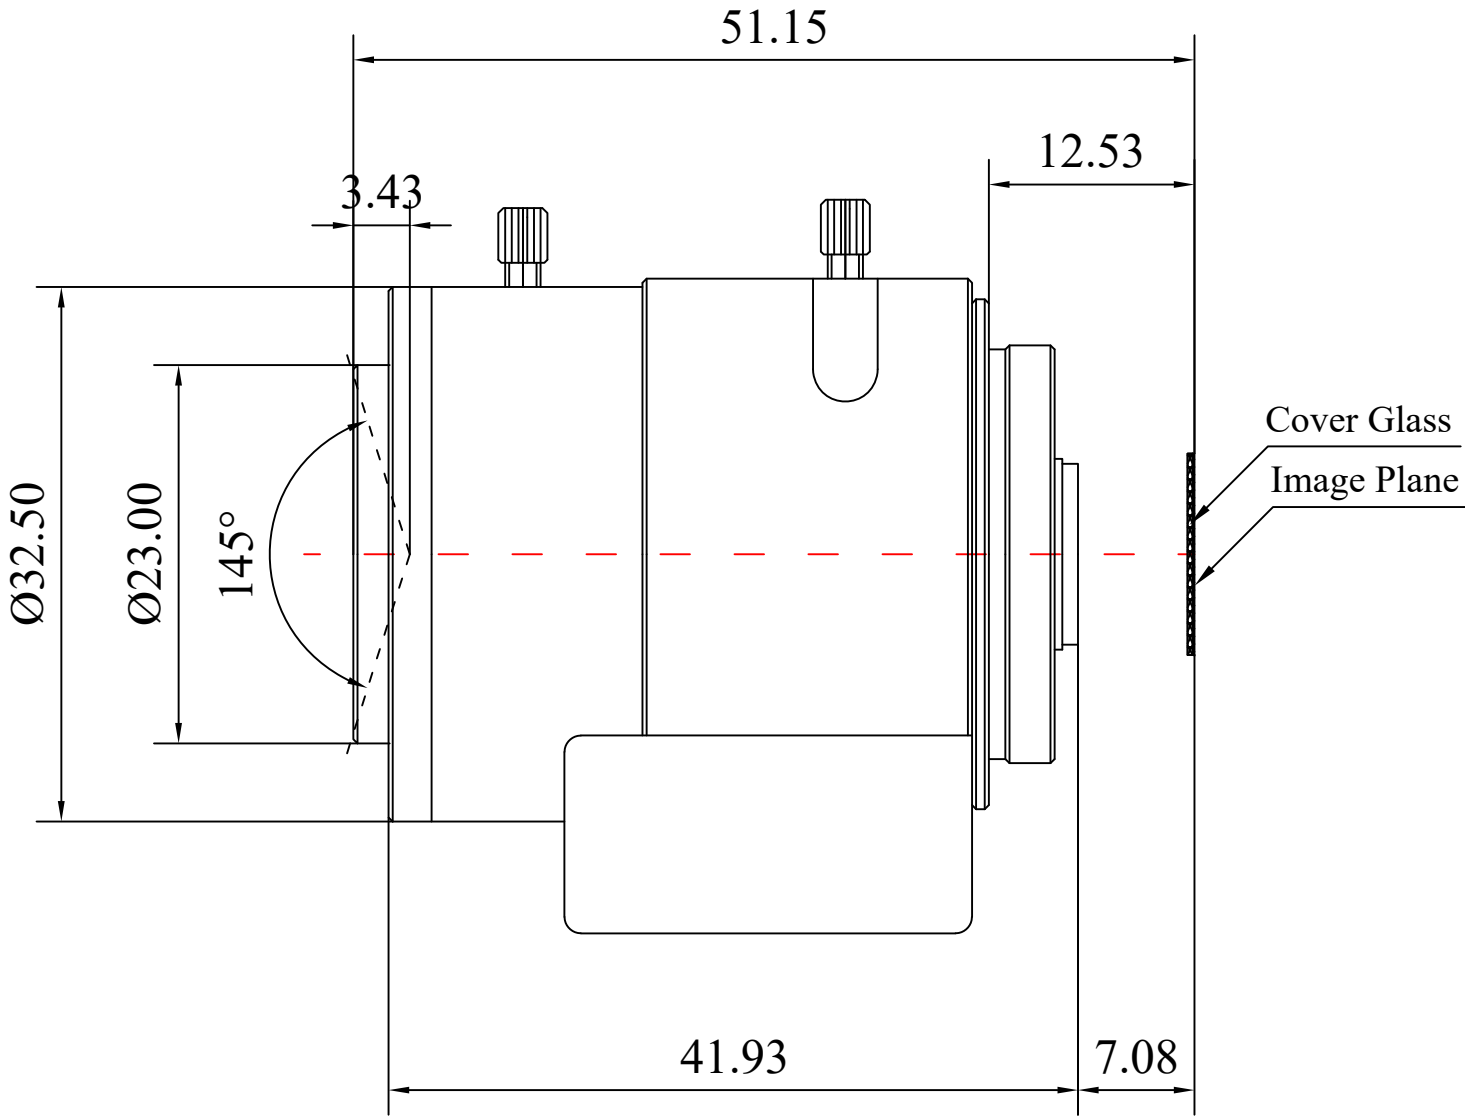


1	Type		Vari-Focal Lens	
2	Image Format		1/1.8"	
3	Image Circle		Ø9.4(Max)	
4	Optical EFL		3.6-10mm(In Air)	
5	Aperture		1.7 (W-T)	
6	Resolution		8MP	
7	System TTL		51.15mm	
8	For Sensor	W-T	1/1.8"(16:9)	1/3"(4:3)
9	F.O.V	H	113.5°~46.3°	65.0°~28.9°
10		V	57.5°~25.9°	48.0°~21.7°
11		D	145.0°~53.4°	83.2°~36.2°
12	C.R.A		10.6°(W)~10.92°(T)	
13	Illumination		38%(W)~75.0%(T)	
14	Distortion		-67.2%(W)~-8.24%(T)	
15	Optical BFL		---	
16	Mechanical BFL		6.99	
17	Dimension Figure		Ø32.5*41.93mm	
18	Mount Type		CS	
19	IR Correction		Yes	
20	Element		---	
21	Wavelength		430-650&850	
22	M.O.D		0.5m(W)~1.5m(T)	
23	Weight		---	
24	Iris Operation		Auto	
25	Zoom Operation		Manual	
26	Focus Operation		Manual	
27	Operating Temperature		-20° ~ +85°	
28	Storage Temperature		-20° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2022-01-24	CH905C Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2019-05-26	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2019-07-20	
mm	Angle	±0.5°	Approval	Sanmu	2019-07-20	