
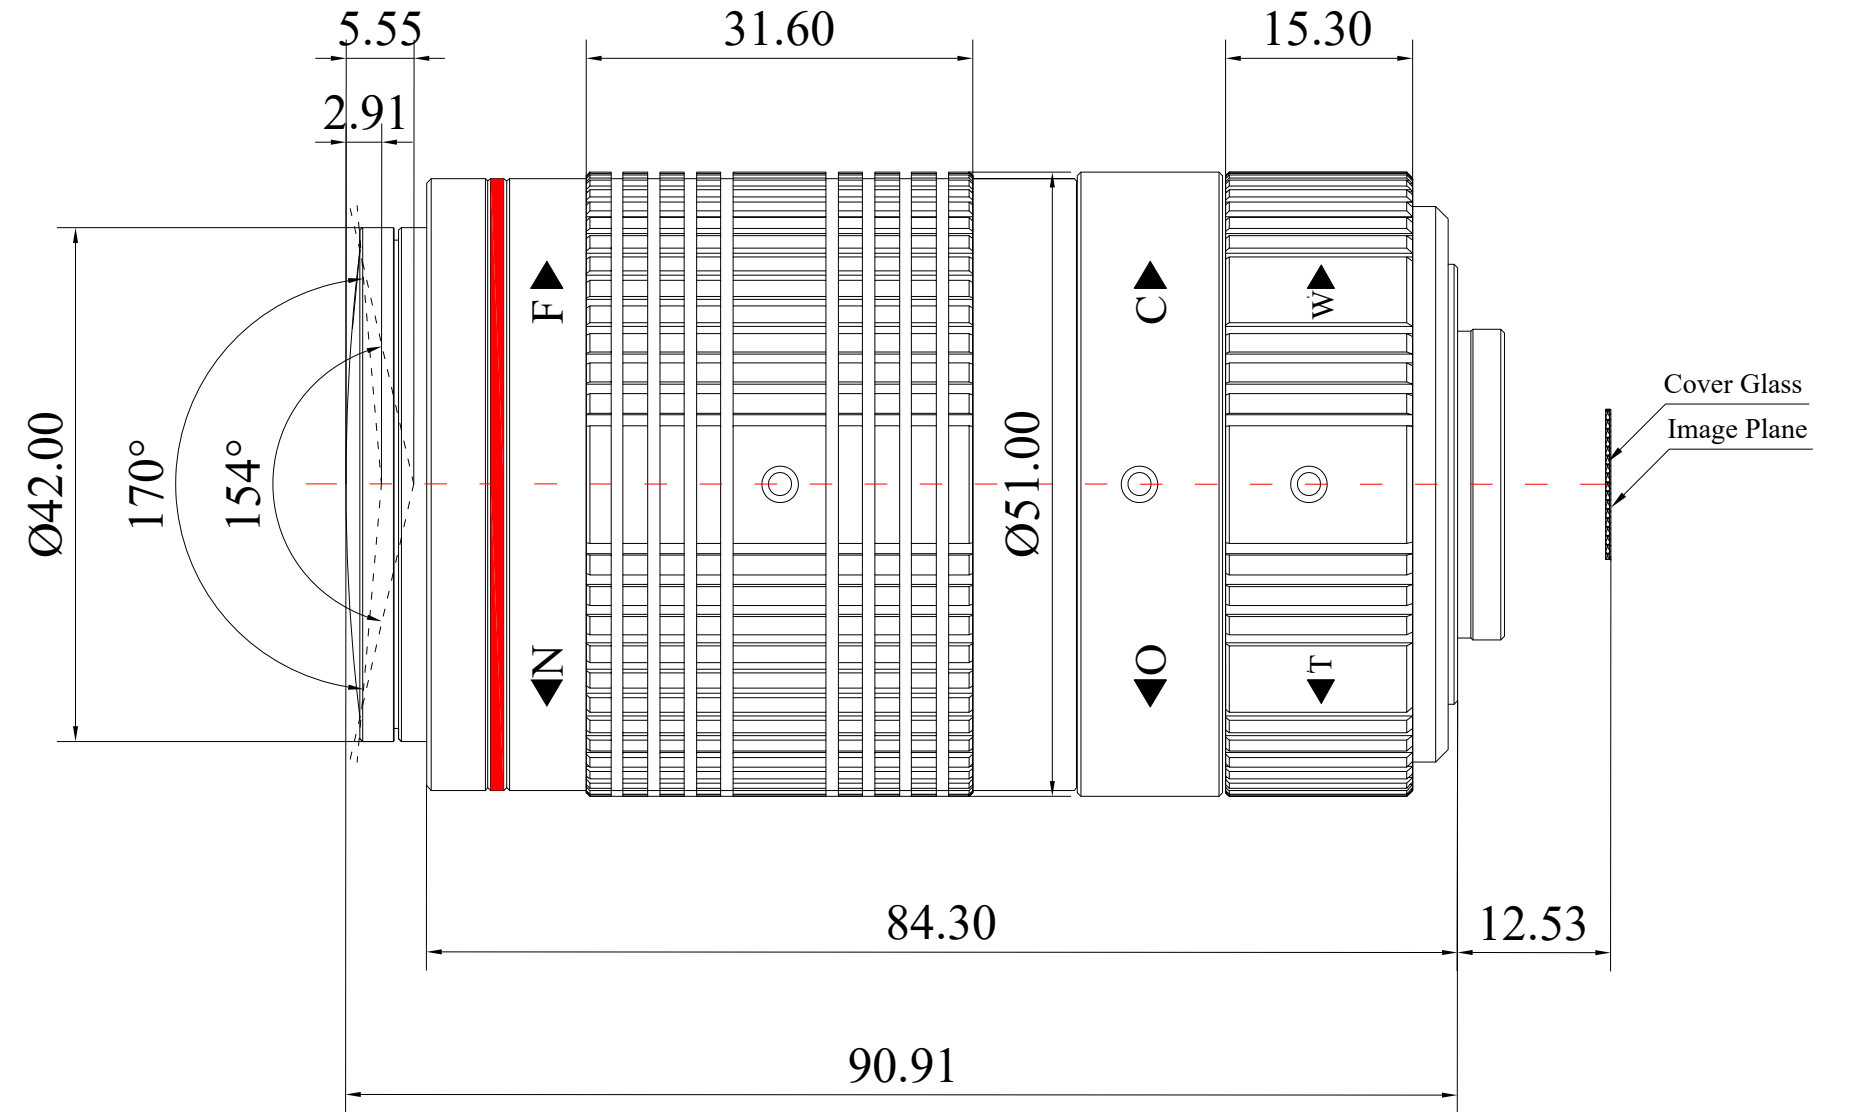


1	Type	Vari-Focal Lens			
2	Image Format	1/1.7"			
3	Image Circle	Ø9.5(Max)			
4	Optical EFL	3.6-18mm(In Air)			
5	Aperture	1.6 (W)			
6	Resolution	12MP			
7	System TTL	103.44mm			
8	For Sensor	16:9	W-T	1/1.7"	1/1.8"
9	F.O.V	H		128°~30.5°	120°~29.2°
10		V		63°~17.1°	61°~16.4°
11		D		170°~35°	154°~33.6°
12	C.R.A	13.2°(W)~9.7°(T)			
13	Illumination	45%(W)~77.0%(T)			
14	Distortion	-75.67%(W)~-2.69%(T)			
15	Optical BFL	9.2(W)~20.42(T)			
16	Mechanical BFL	8.7(W)~19.92(T)			
17	Dimension Figure	Ø51.00*84.30mm			
18	Mount Type	CS			
19	IR Correction	Yes			
20	Element	---			
21	Wavelength	430-650&850			
22	M.O.D	0.5m(W)~1.5m(T)			
23	Weight	---			
24	Iris Operation	Manual			
25	Zoom Operation	Manual			
26	Focus Operation	Manual			
27	Operating Temperature	-20° ~ +85°			
28	Storage Temperature	-20° ~+85°			



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2022-01-10	CH936BD Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2019-05-26	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2019-07-20	
mm	Angle	±0.5°	Approval	Sanmu	2019-07-20	