
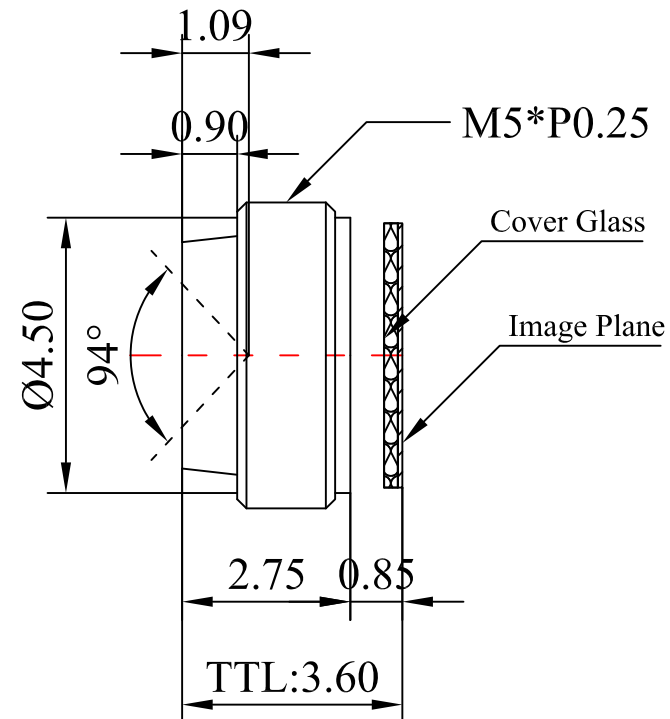
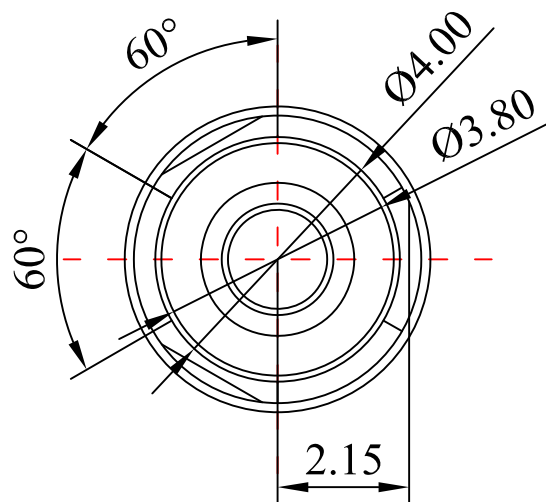


1	Type		M5 Lens
2	Resolution		5MP
3	Image Format		1/5"
4	Image Circle		φ3.90mm(MAX)
5	EFL		1.83mm
6	TTL		3.6mm
7	F/NO.		2.0
8	FFL (M)		0.85mm
9	BFL (O)		0.90mm
10	For Sensor		1/5"
11	F.O.V	Horizontal	75.1°
12		Vertical	59.9°
13		Diagonal	88.1°
14	TV Distortion		<-1.5%
15	Relative Ill.		>30%
16	Chief Ray Angle		<30°
17	M.O.D		0.1m~∞
18	Mount Type		M5*P0.25
19	Dimension Figure		φ5*L2.75mm
20	Lens Structure		5P
21	IR-Filter		T=50%&IR650±10nm
22	Waterproof		---
23	Weight		---
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-15° ~+45°
28	Storage Temperature		-15° ~+45°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2022-04-13	CH2023AB Rev1.0		
	4:1	X.0	±0.15			
Units	X.00	±0.10	Design	Linda	2022-02-27	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2022-03-16	
mm	Angle	±0.5°	Approval	Sanmu	2022-04-12	