
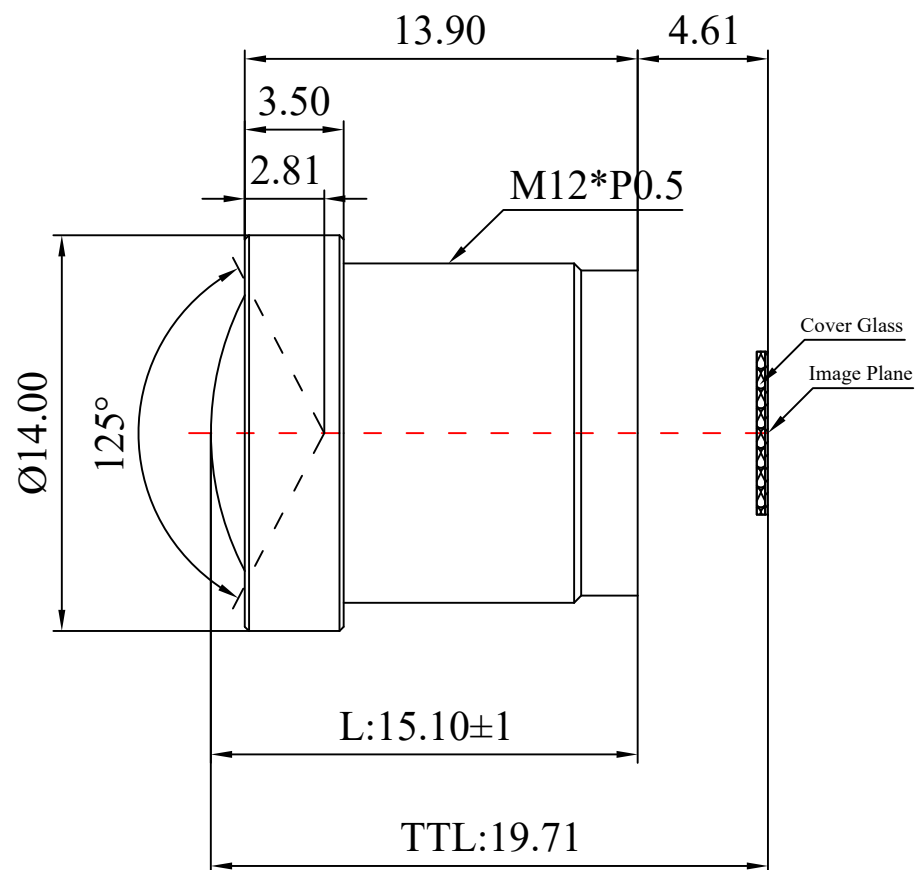


1	Type		Low Distortion Lens			
2	Resolution		8MP			
3	Image Format		1/2.5"			
4	Image Circle		φ7.3mm(MAX)			
5	EFL		2.47mm			
6	TTL		19.71mm			
7	F/NO.		F2.4			
8	FFL (M)		4.61mm			
9	BFL (O)		5.13mm			
10	For Sensor		IMX274	OV2710	IMX335	AR0234CS
11	F.O.V	H	107°	105°	100°	108°
12		V	86°	66°	80°	74°
13		D	125°	117°	118°	121°
14	OPT Distortion		<-8%(H)	<-7%(H)	<-6.5%(H)	
15	Relative Ill.		>65%			
16	Chief Ray Angle		<12.3°			
17	M.O.D		0.1m~∞			
18	Mount Type		M12*P0.5			
19	Dimension Figure		φ14.0*L15.10mm			
20	Lens Structure		4G2P			
21	IR-Filter		Non-IR			
22	Weight		---			
23	Iris Operation		Fixed			
24	Zoom Operation		Fixed			
25	Focus Operation		Manual			
26	Operating Temperature		-15° ~+65°			
27	Storage Temperature		-15° ~+65°			



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	± 0.2	2021-09-28	CH3748A Rev1.0		
4: 1	X.0	± 0.15				
Units	X.00	± 0.10	Design	Linda	2021-08-19	 3D Angle Projection
	X.000	± 0.001	Checked	Anna	2021-09-21	
mm	Angle	± 0.5 °	Approval	Sanmu	2021-09-23	