

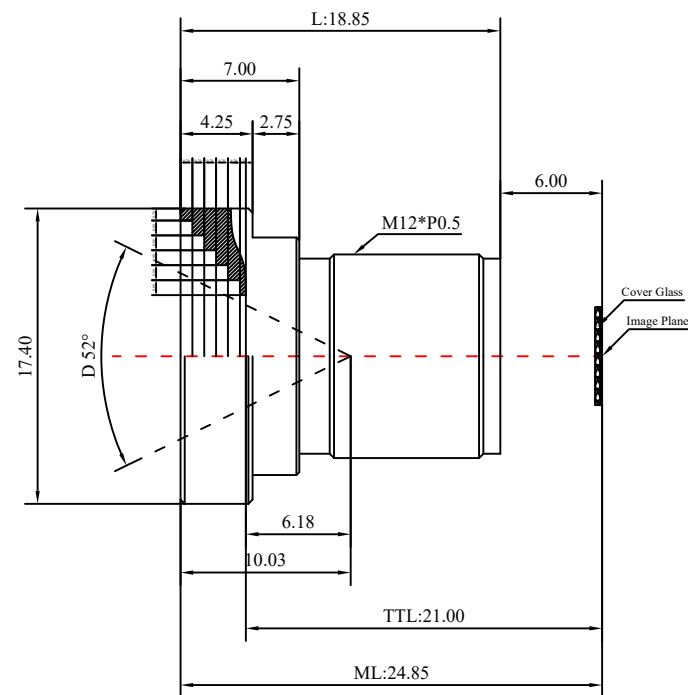


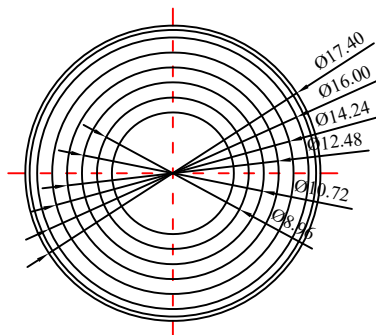


1	Type		Low Distortion Lens
2	Resolution		16MP
3	Image Format		1/2.3"
4	Image Circle		φ8.0mm(MAX)
5	EFL		8.36mm
6	ML		25.70mm
7	F/NO.		2.8
8	FFL (M)		6.50mm
9	BFL (O)		7.89mm
10	For Sensor		IMX577
11	F.O.V	Horizontal	41.3°
12		Vertical	31.8°
13		Diagonal	50.7°
14	TV Distortion		<-1%
15	Relative Ill.		>70%
16	Chief Ray Angle		<15°
17	M.O.D		0.1m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		φ17.4*L18.85mm
20	Lens Structure		7G
21	IR-Filter		NDVI
22	Weight		3.6g
23	Iris Operation		Fixed
24	Zoom Operation		Fixed
25	Focus Operation		Manual
26	Operating Temperature		-20° ~+85°
27	Storage Temperature		-20° ~+85°



IR No.:CH6087A

Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4: 1	X	± 0.2	2022-01-12	CH3769AF Rev1.0		
	X.0	± 0.15				
Units	X.00	± 0.10	Design	Linda	2021-12-05	 3D Angle Projection
mm	X.000	± 0.001	Checked	Anna	2021-12-26	
	Angle	± 0.5 °	Approval	Sanmu	2022-01-10	



3D Angle Projection