
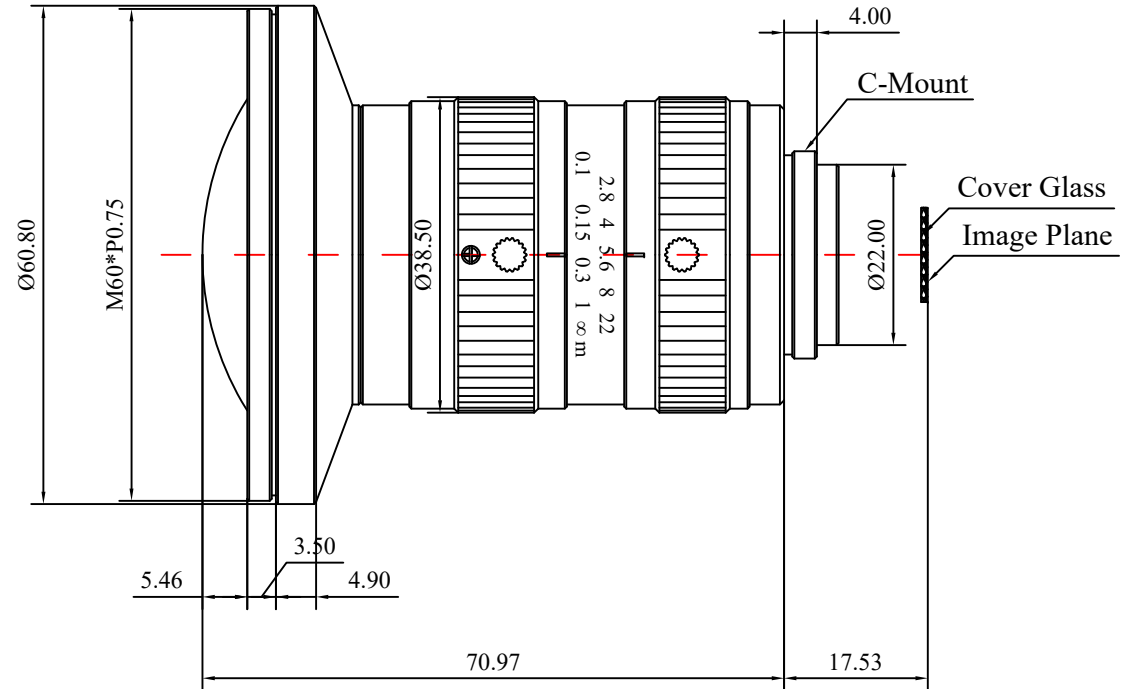


1	Type	Machine Vision Lens		
2	Resolution	25MP		
3	Image Format	1.1"		
4	Image Circle	Ø18.0mm		
5	EFL	8mm		
6	F/No.	F2.8-22		
7	FFL	17.53mm		
8	BFL	13.29mm		
9	For Sensor	1.1" 14.13x10.35mm	1" 11.2x11.26mm	2/3" 8.4x7.1mm
10	F.O.V	Horizontal	82.8°	70.35°
11		Vertical	65.8°	70.35°
12		Diagonal	94.4°	89.55°
13	TV Distortion	<3.2%	<3.2%	<3.2%
14	Relative Ill.	---		
15	M.O.D	0.3m~∞		
16	Mount Type	C-Mount		
17	Dimension	Ø60.8*70.97mm		
18	Lens Structure	---		
19	Weight	---		
20	Iris Operation	Manual		
21	Zoom Operation	Fixed		
22	Focus Operation	Manual		
23	Operating Temperature	-20°C~-+85°C		
24	Storage Temperature	-20°C ~+85°C		



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2024-04-07	CH663A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2024-01-02	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2024-02-01	
mm	Angle	±0.5°	Approval	Sanmu	2024-03-18	