


1	Type	Fisheye Lens	
2	Resolution	16MP	
3	Image Format	1/1.8"	
4	Image Circle	φ7.72mm(MAX)	
5	EFL	2.2mm	
6	TTL	30.39mm	
7	F/NO.	F2.8	
8	FFL (M)	3.79mm	
9	BFL (O)	4.16mm	
10	For Sensor	1/1.8"	
11	F.O.V	Horizontal	217.8° Φ7.68
12		Vertical	114.5° Φ4.35
13		Diagonal	217.8° Φ7.68
14	F-Theta Distortion	<-9.84%	
15	Relative Ill.	>80%	
16	Chief Ray Angle	<12°	
17	M.O.D	0.1m~∞	
18	Mount Type	M12*P0.5	
19	Dimension Figure	Φ25.0*L27.40mm	
20	Lens Structure	8G	
21	IR-Filter	IR650nm	
22	Waterproof	No	
23	Weight	15.2g	
24	Iris Operation	Fixed	
25	Zoom Operation	Fixed	
26	Focus Operation	Manual	
27	Operating Temperature	-20° ~+85°	
28	Storage Temperature	-20° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2022-10-20	CH8045AB Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2022-07-01	
	X.000	±0.001	Checked	Anna	2022-07-09	
mm	Angle	±0.5°	Approval	Sanmu	2022-09-10	

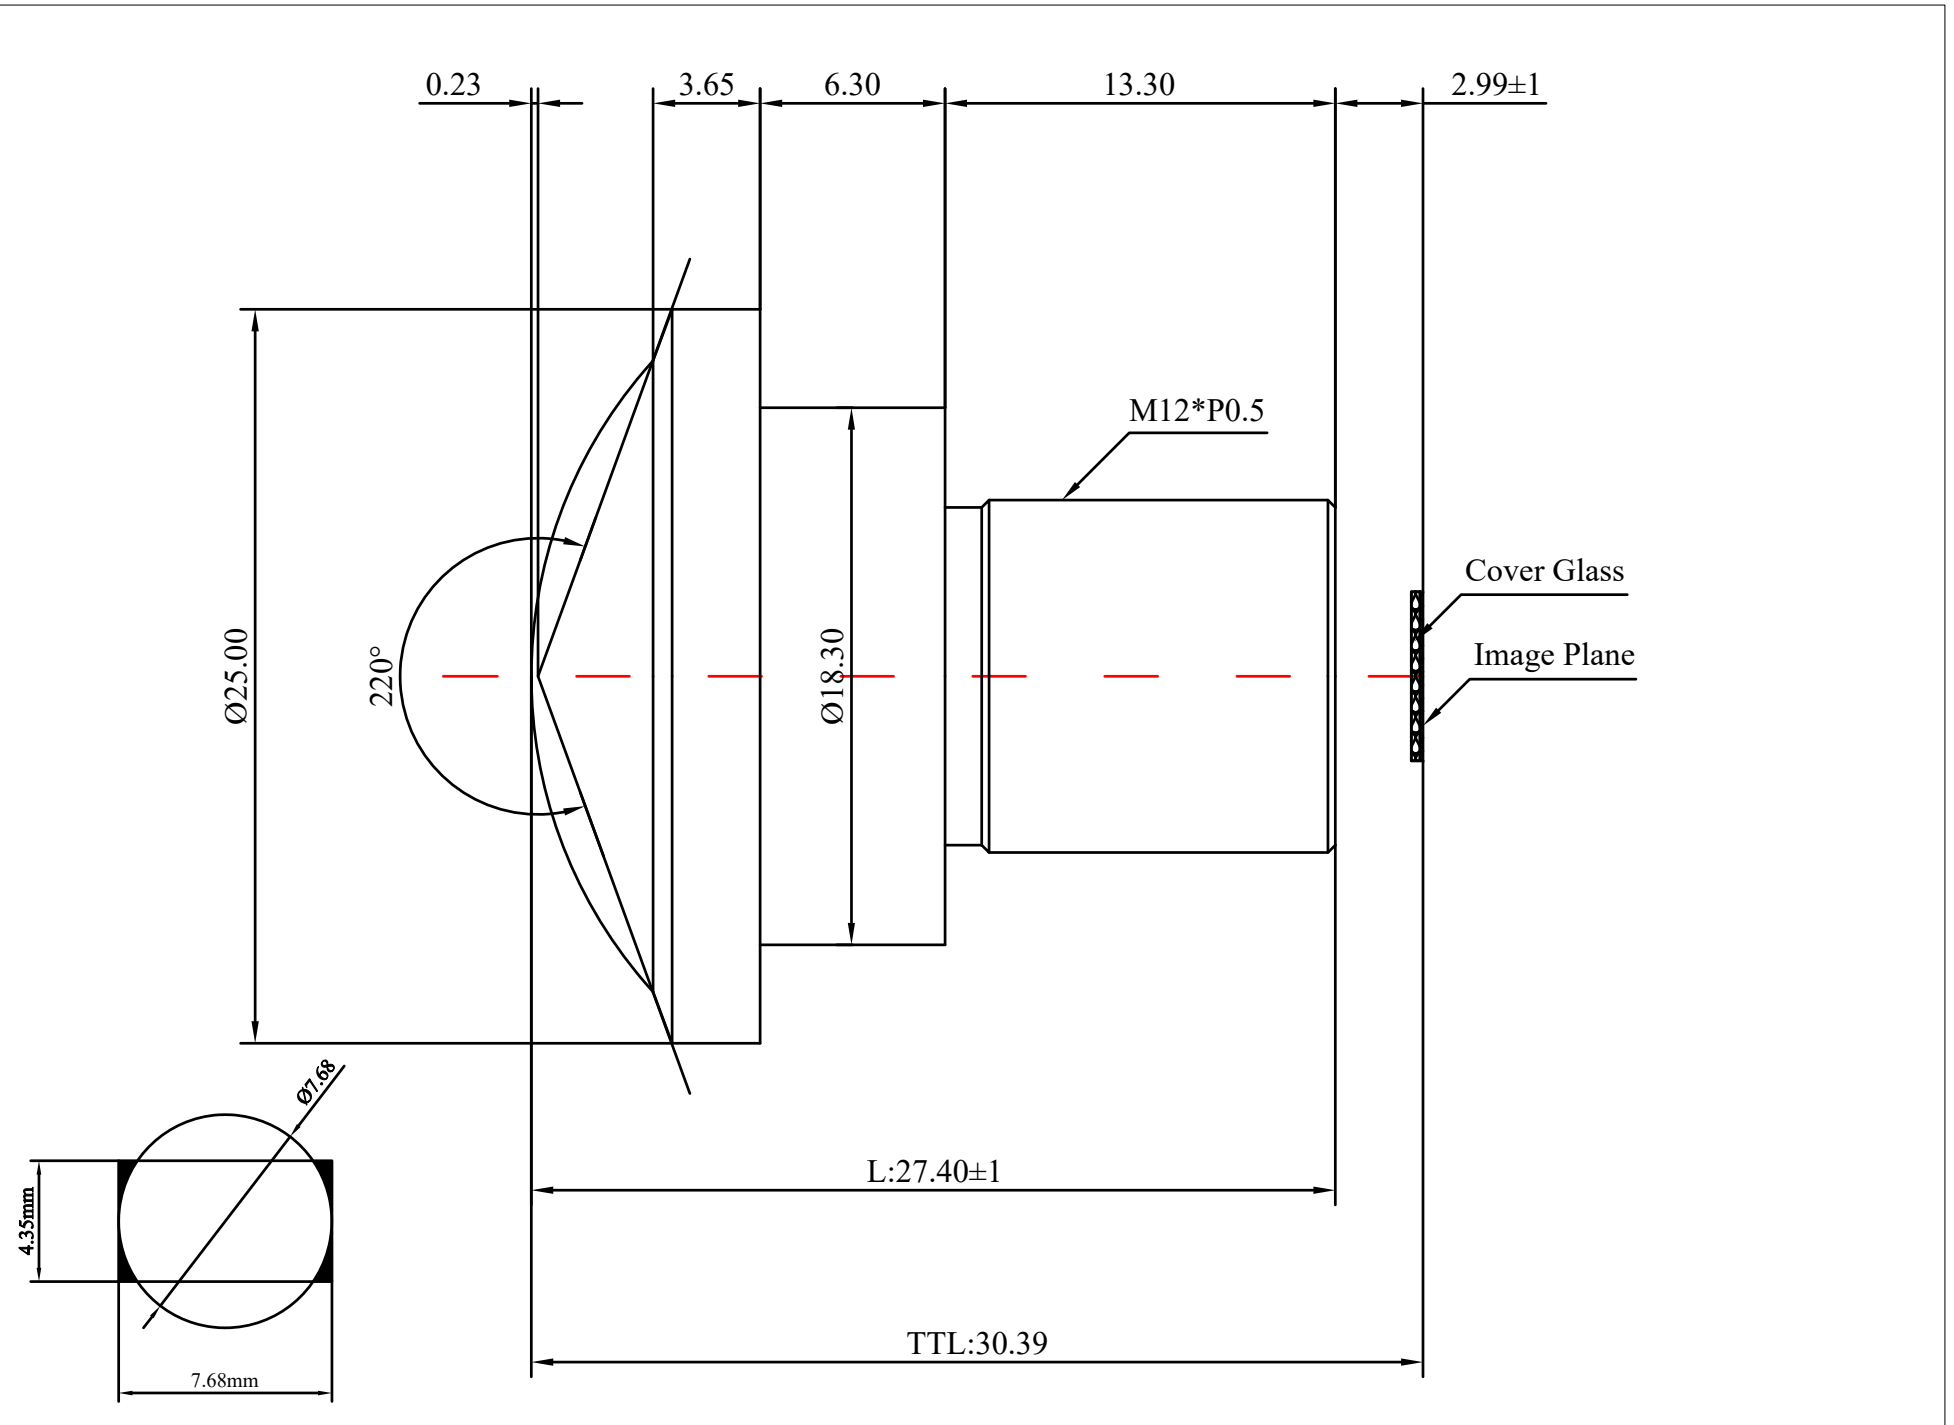