
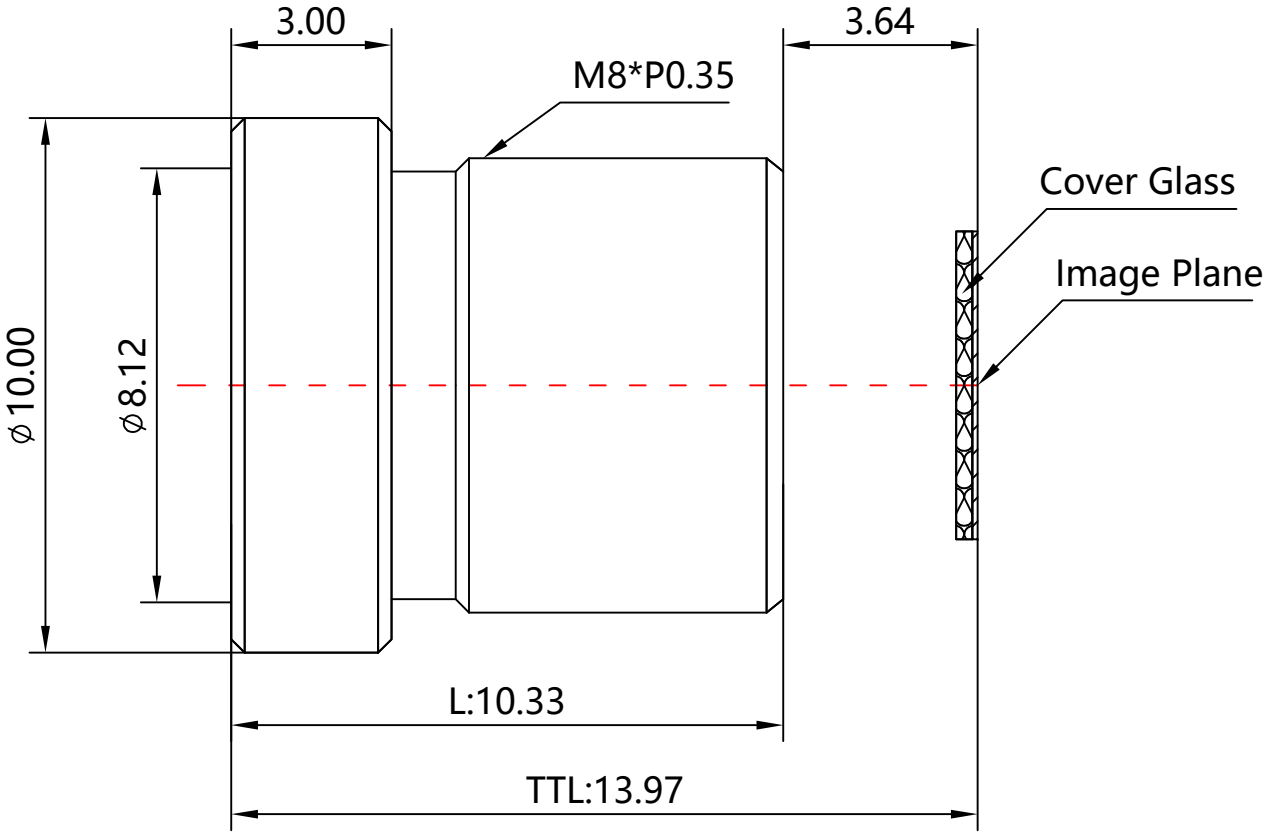


1	Type		Wide Angle Lens		
2	Resolution		MP		
3	Image Format		1/2.7"		
4	Image Circle		φ6.8mm(MAX)		
5	EFL		2.92mm		
6	TTL		13.97mm		
7	F/NO.		2.4		
8	FFL (M)		3.64mm		
9	BFL (O)		5.26mm		
10	For Sensor		OV2710	OV4689	OV5640
11	F.O.V	Horizontal	132°	114°	85°
12		Vertical	66°	71°	62°
13		Diagonal	163°	146°	114°
14	TV Distortion		<-24%		
15	Relative Ill.		>63%		
16	Chief Ray Angle		<11°		
17	M.O.D		0.1m~∞		
18	Mount Type		M8*P0.35		
19	Dimension Figure		φ10.0*L10.33mm		
20	Lens Structure		5G		
21	IR-Filter		T=50% &650±10nm		
22	Waterproof		No		
23	Weight		3g		
24	Iris Operation		Fixed		
25	Zoom Operation		Fixed		
26	Focus Operation		Manual		
27	Operating Temperature		-20° ~+85°		
28	Storage Temperature		-20° ~+85°		



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2019-05-07	CH1300BB Rev1.2		
5 :1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2016-06-15	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2016-08-05	
mm	Angle	±0.5°	Approval	Sanmu	2016-10-25	