
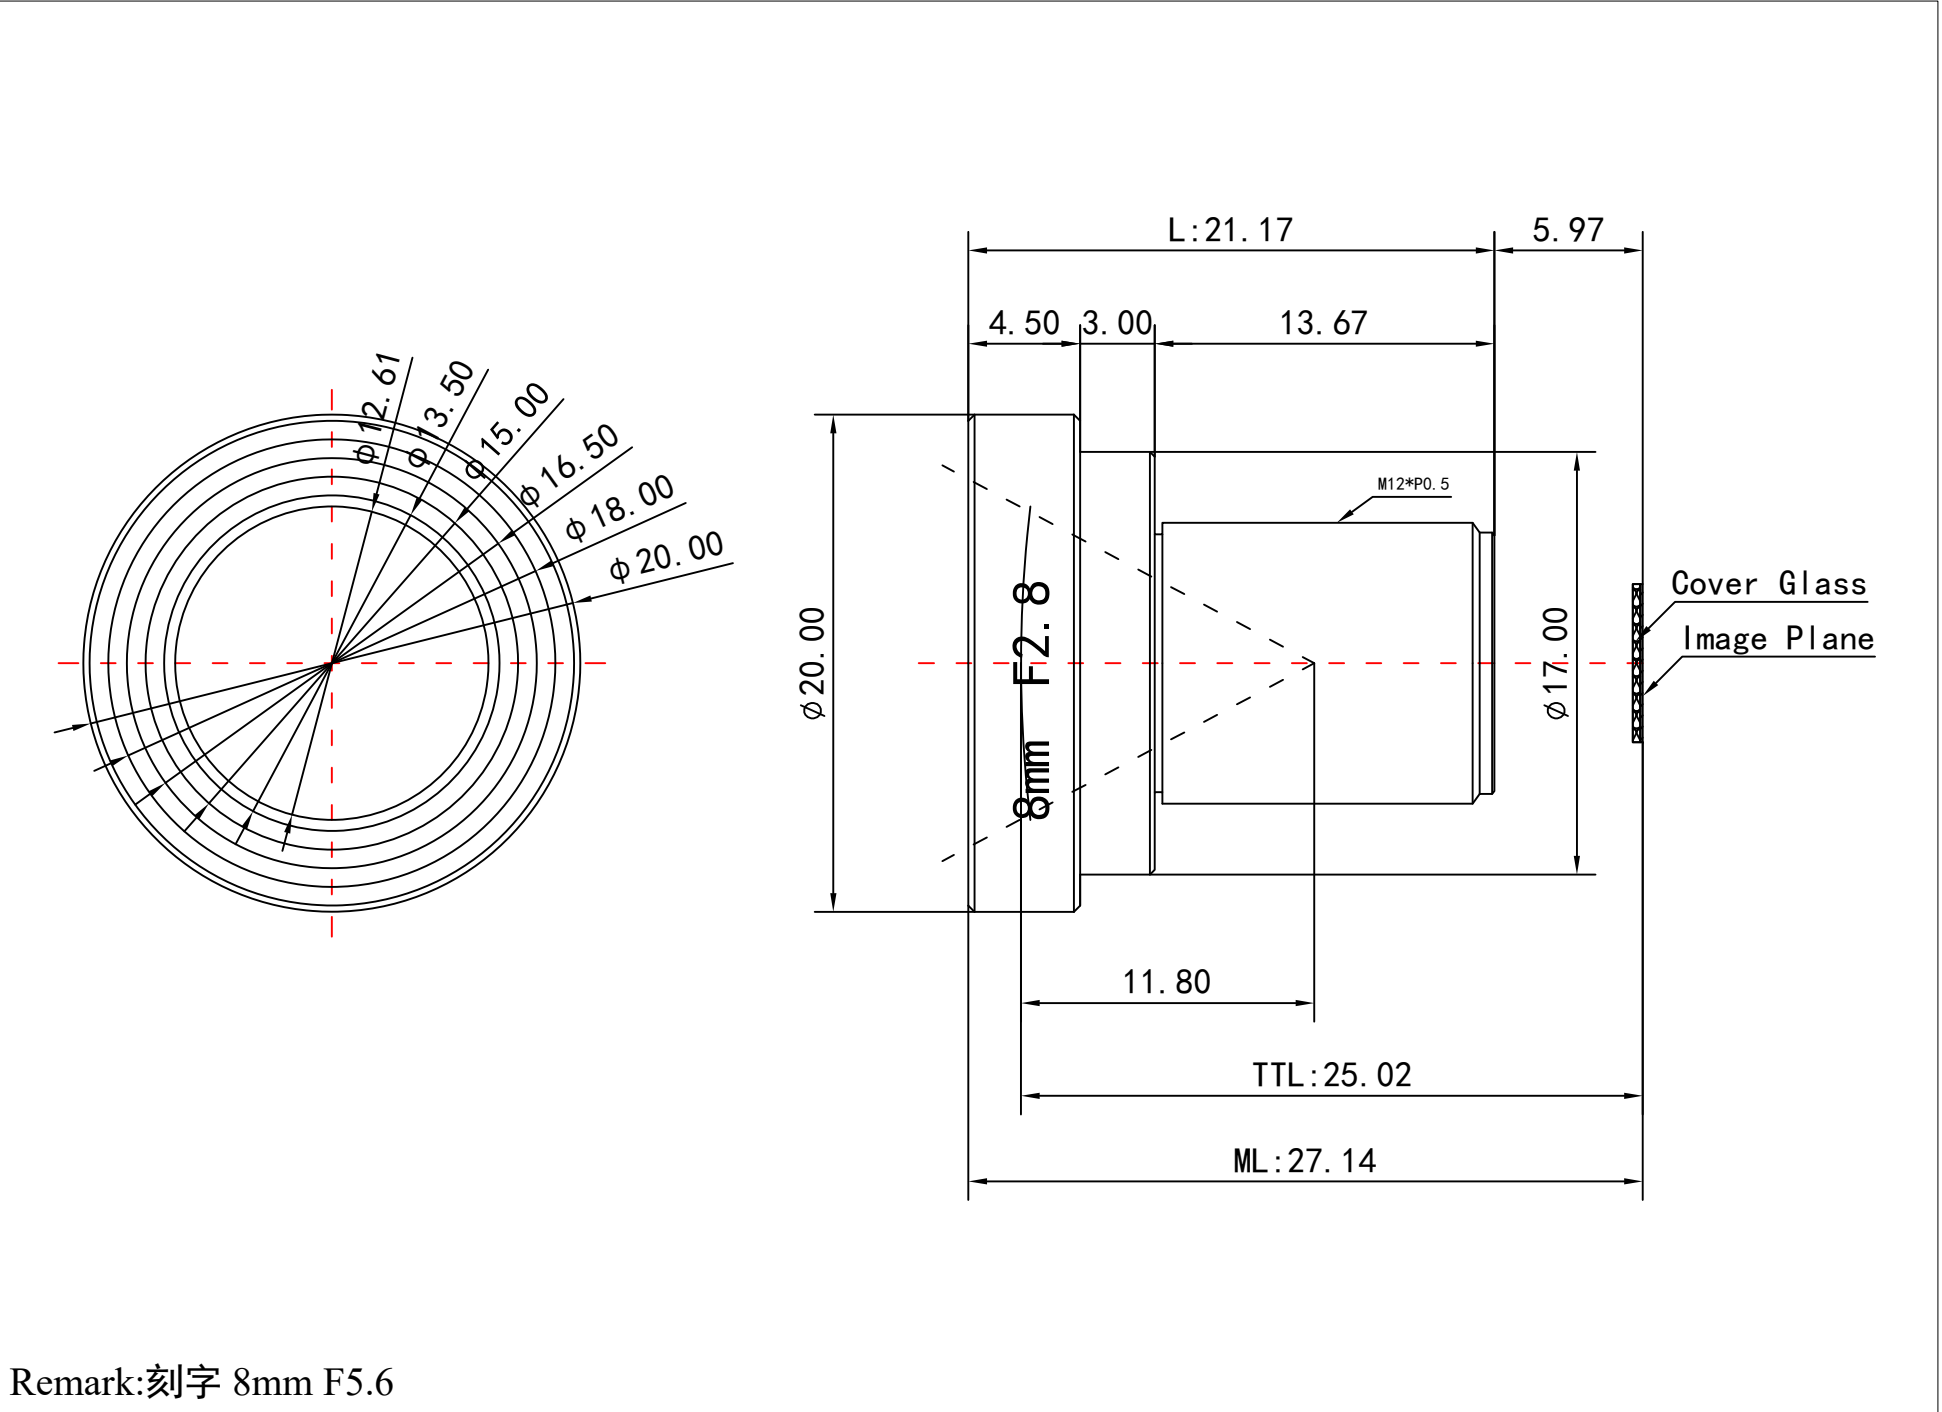


1	Type		Low Distortion Lens	
2	Resolution		8.8MP	
3	Image Format		1/1.8"	
4	Image Circle		φ9.0mm(MAX)	
5	EFL		8.0mm	
6	TTL		25.02mm	
7	F/NO.		5.6	
8	FFL (M)		5.97mm	
9	BFL (O)		9.38mm	
10	For Sensor		1/1.8"	1/3"
11	F.O.V	Horizontal	47°	32°
12		Vertical	35°	25°
13		Diagonal	56°	40°
14	TV Distortion		<-0.3%	<-0.2%
15	Relative Ill.		>60%	>65%
16	Chief Ray Angle		<24°	<24°
17	M.O.D		0.15m~∞	
18	Mount Type		M12*P0.5	
19	Dimension Figure		φ20.0*L21.17mm	
20	Lens Structure		7G8E All Glass	
21	Filter		Non-IR	
22	Weight		7.4g	
23	Iris Operation		Fixed	
24	Zoom Operation		Fixed	
25	Focus Operation		Manual	
26	Operating Temperature		-20° +65°	
27	Storage Temperature		-20° +85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	± 0.1	2017-04-11	CH162G Rev1. 0		
4: 1	X.0	± 0.05				
Units	X.00	± 0.03	Design	Linda	2017-02-10	 3D Angle Projection
	X.000	± 0.001	Checked	Anna	2017-03-10	
mm	Angle	± 0.5°	Approval	Sanmu	2017-03-28	