


1	Type	Scan Lens	
2	Resolution	MP	
3	Image Format	1/4"	
4	Image Circle	φ4.8mm(MAX)	
5	EFL	3.55mm	
6	TTL	10.58mm	
7	F/NO.	3.0	
8	FFL (M)	1.39mm	
9	BFL (O)	2.16mm	
10	For Sensor	1/4"	
11	F.O.V	Horizontal	54°
12		Vertical	43°
13		Diagonal	70°
14	TV Distortion	<1%	
15	Relative Ill.	>50%	
16	Chief Ray Angle	<10°	
17	M.O.D	0.01m~∞	
18	Mount Type	M12*P0.5	
19	Dimension Figure	φ14.0*L9.19mm	
20	Lens Structure	4E+IR	
21	IR-Filter	T=50%&IR650nm±10nm	



22	Weight	1.1g	Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
23	Iris Operation	Fixed		4: 1	X	± 0.2	2019-10-14	CH1950A Rev1.1	
24	Zoom Operation	Fixed	Units		X.0	± 0.15			
25	Focus Operation	Manual		mm	X.00	± 0.10	Design	Linda	2015-07-08
26	Operating Temperature	-20° ~+85°	X.000		± 0.001	Checked	Anna	2015-09-17	
27	Storage Temperature	-20° ~+85°	Angle		± 0.5°	Approval	Sanmu	2015-09-22	

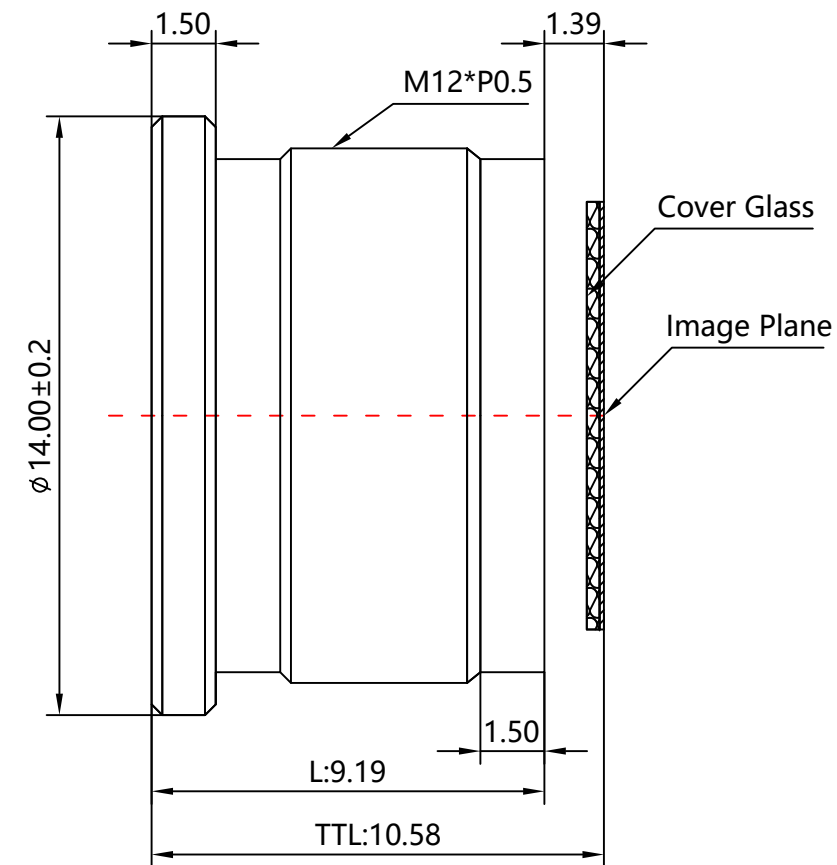