
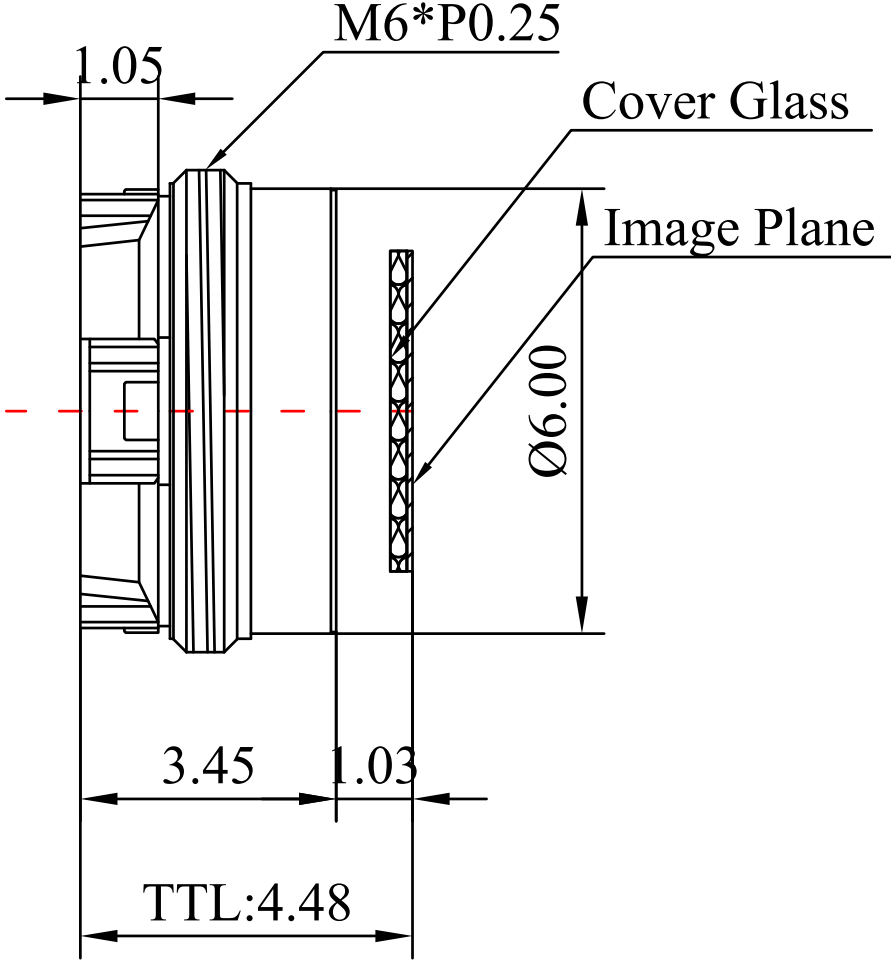
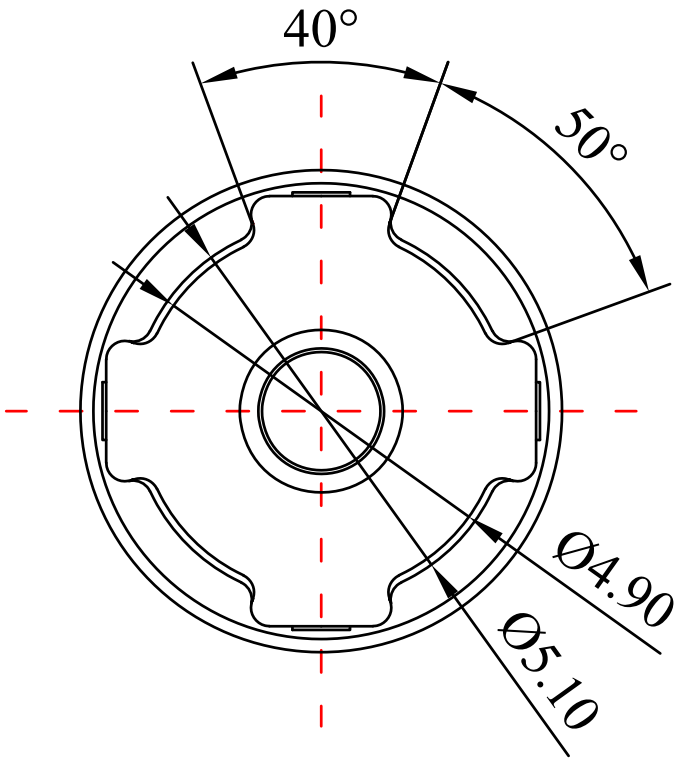


1	Type		M6 Lens
2	Resolution		13MP
3	Image Format		1/3"
4	Image Circle		φ6.17mm(MAX)
5	EFL		4.22mm
6	TTL		3.789mm
7	F/NO.		2.2
8	FFL (M)		1.03mm
9	BFL (O)		1.20mm
10	For Sensor		IMX214
11	F.O.V	Horizontal	62.0°
12		Vertical	48.5°
13		Diagonal	73.8°
14	TV Distortion		<-1%
15	Relative Ill.		>33.2%
16	Chief Ray Angle		<33.9°
17	M.O.D		0.1m~∞
18	Mount Type		M6.5*P0.35
19	Dimension Figure		φ6.5*L3.45mm
20	Lens Structure		5P
21	IR-Filter		Non-IR
22	Waterproof		No
23	Weight		---
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-15° ~+45°
28	Storage Temperature		-15° ~+45°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2025-06-12	CH2020B Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2021-07-03	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2021-07-09	
mm	Angle	±0.5°	Approval	Sanmu	2021-07-12	