



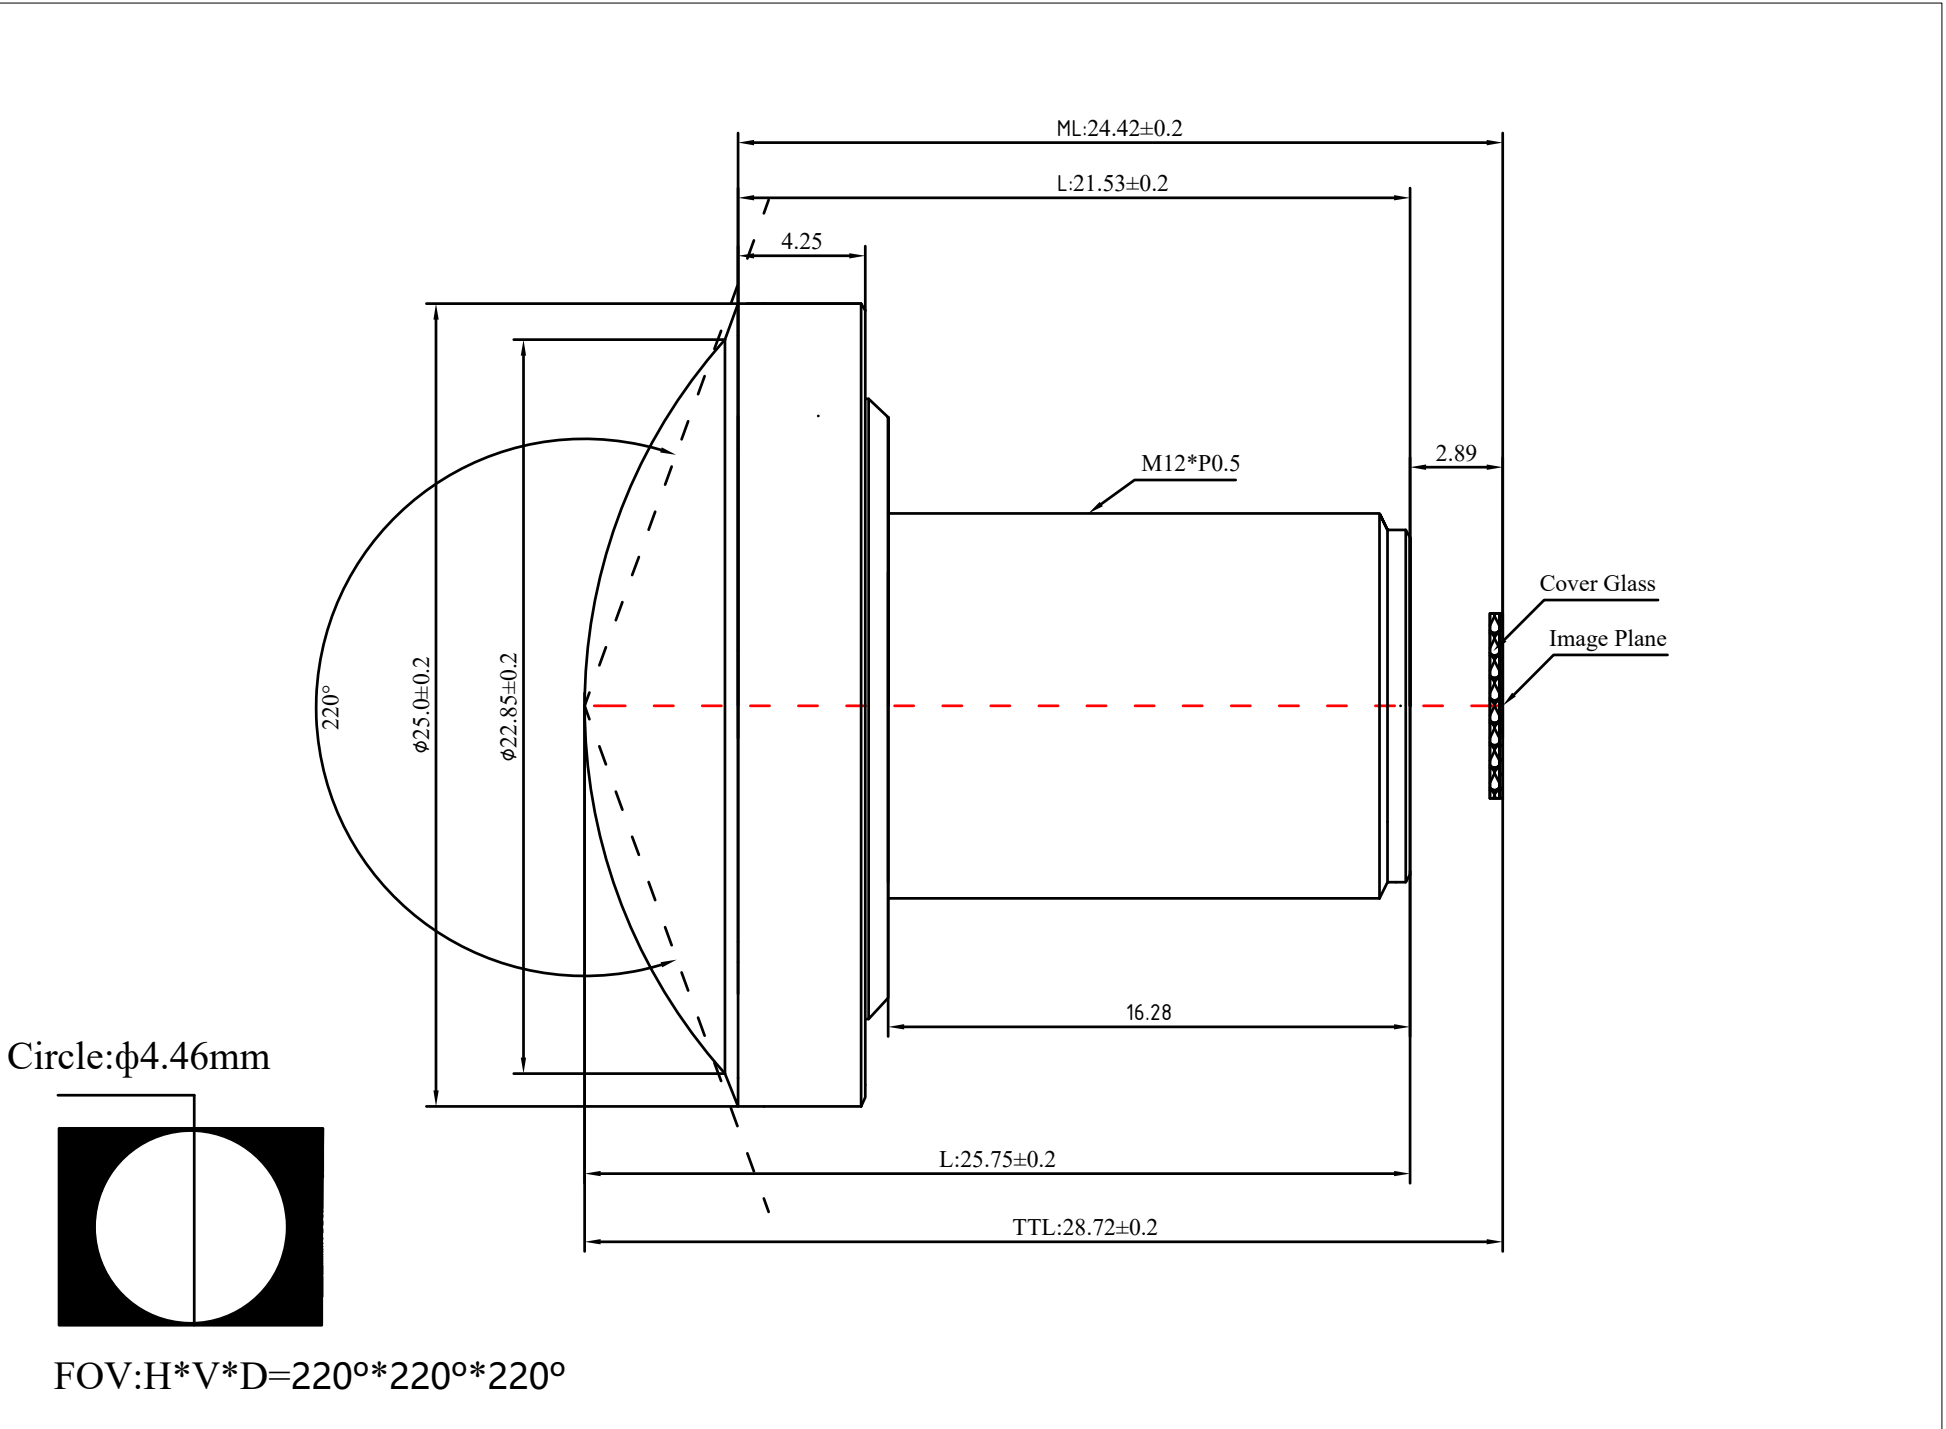

PRODUCT: CH308A

1	Type		Fisheye Lens
2	Resolution		16MP
3	Image Format		1/2.3"&1/3"
4	Image Circle		φ4.46mm(MAX)
5	EFL		1.21mm
6	TTL		28.72mm
7	F/NO.		2.0
8	FFL (M)		2.89mm
9	BFL (O)		3.95mm
10	For Sensor		1/2.3"
11	F.O.V	Horizontal	220°
12		Vertical	220°
13		Diagonal	220°
14	TV Distortion		<-100%
15	Relative Ill.		>81%
16	Chief Ray Angle		<24°
17	M.O.D		0.1m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		φ25.00*L25.75mm
20	Lens Structure		10G
21	IR-Filter		Non-IR
22	Waterproof		No
23	Weight		14.8g
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-20° ~+85°
28	Storage Temperature		-20° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
3 :1	X	±0.2	2019-04-26	CH308A Rev1.0		
	X.0	±0.15				
Untis	X.00	±0.10	Design	Linda	2016-09-05	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2016-11-16	
mm	Angle	±0.5°	Approval	Sanmu	2016-11-19	