


1	Type	Board Lens	
2	Resolution	MP	
3	Image Format	1/4"	
4	Image Circle	φ4.6mm(MAX)	
5	EFL	3.7mm	
6	TTL	11.86mm	
7	F/NO.	2.4	
8	FFL (M)	2.4mm	
9	BFL (O)	3.64mm	
10	For Sensor	1/4"	
11	F.O.V	Horizontal	65°
12		Vertical	46°
13		Diagonal	88°
14	TV Distortion	---	
15	Relative Ill.	>50%	
16	Chief Ray Angle	<17°	
17	M.O.D	0.1m~∞	
18	Mount Type	M10*P0.5	
19	Dimension Figure	φ10.00*L9.46mm	
20	Lens Structure	4G	
21	IR-Filter	Non-IR	
22	Waterproof	No	
23	Weight	---	
24	Iris Operation	Fixed	
25	Zoom Operation	Fixed	
26	Focus Operation	Manual	
27	Operating Temperature	-20° ~+85°	
28	Storage Temperature	-20° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2023-04-07	CH3328B Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2023-03-16	
	X.000	±0.001	Checked	Anna	2023-03-24	
mm	Angle	±0.5°	Approval	Sanmu	2023-03-29	

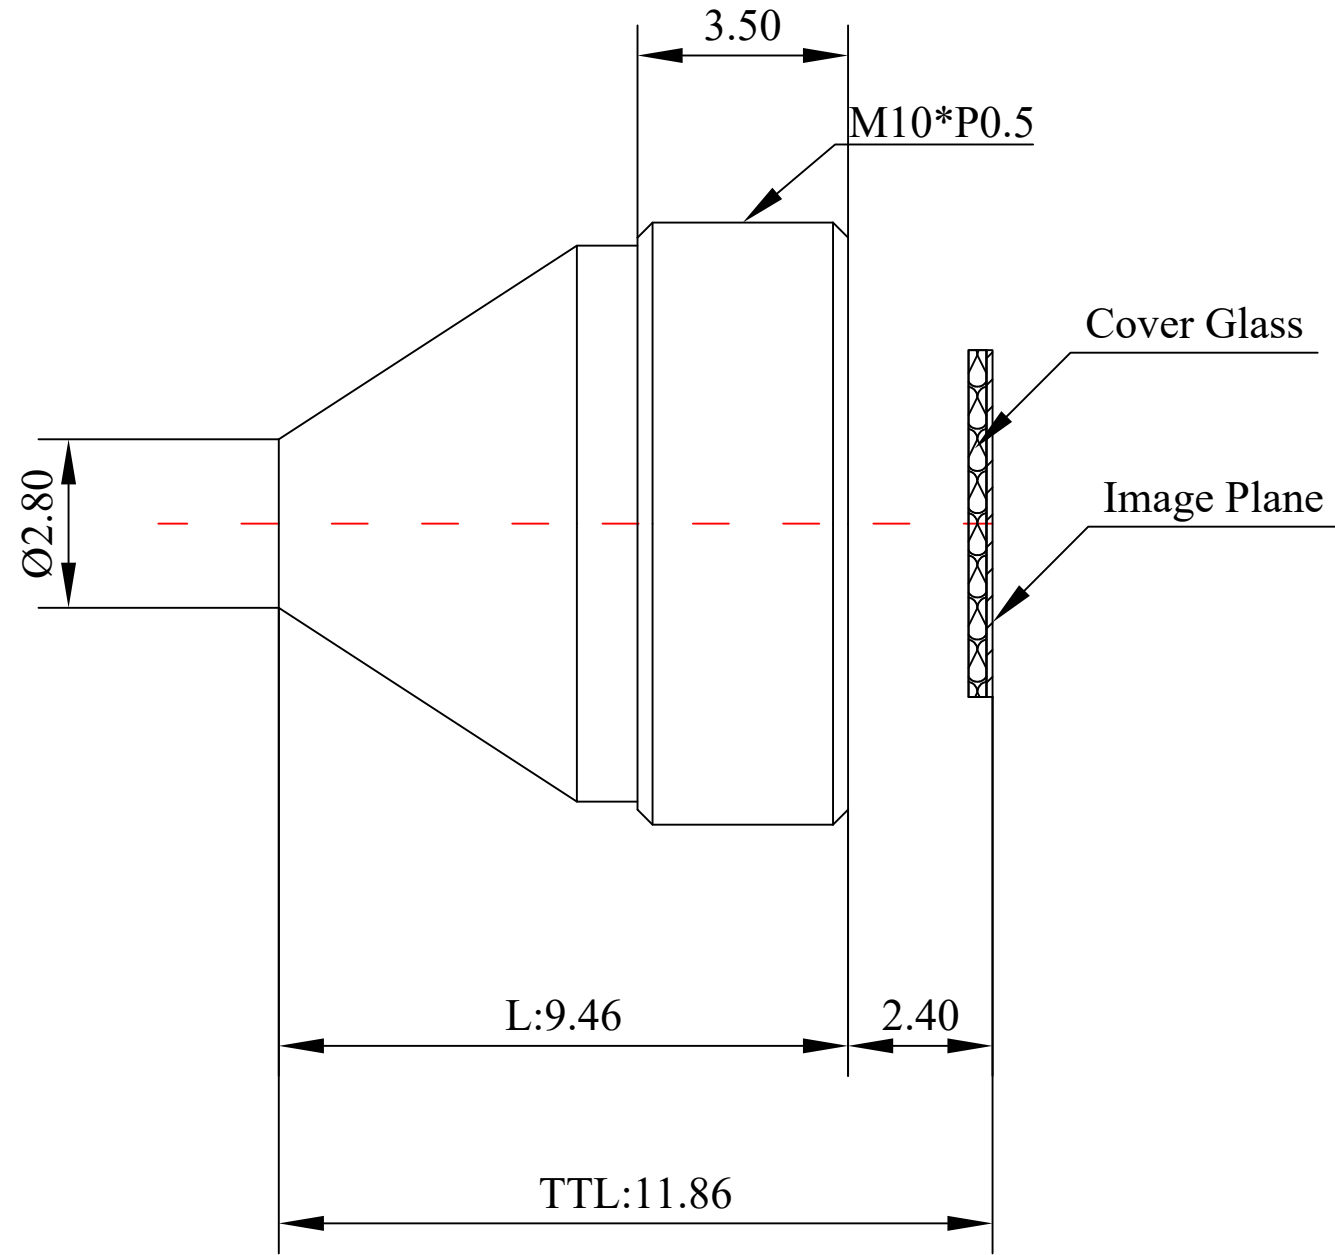