
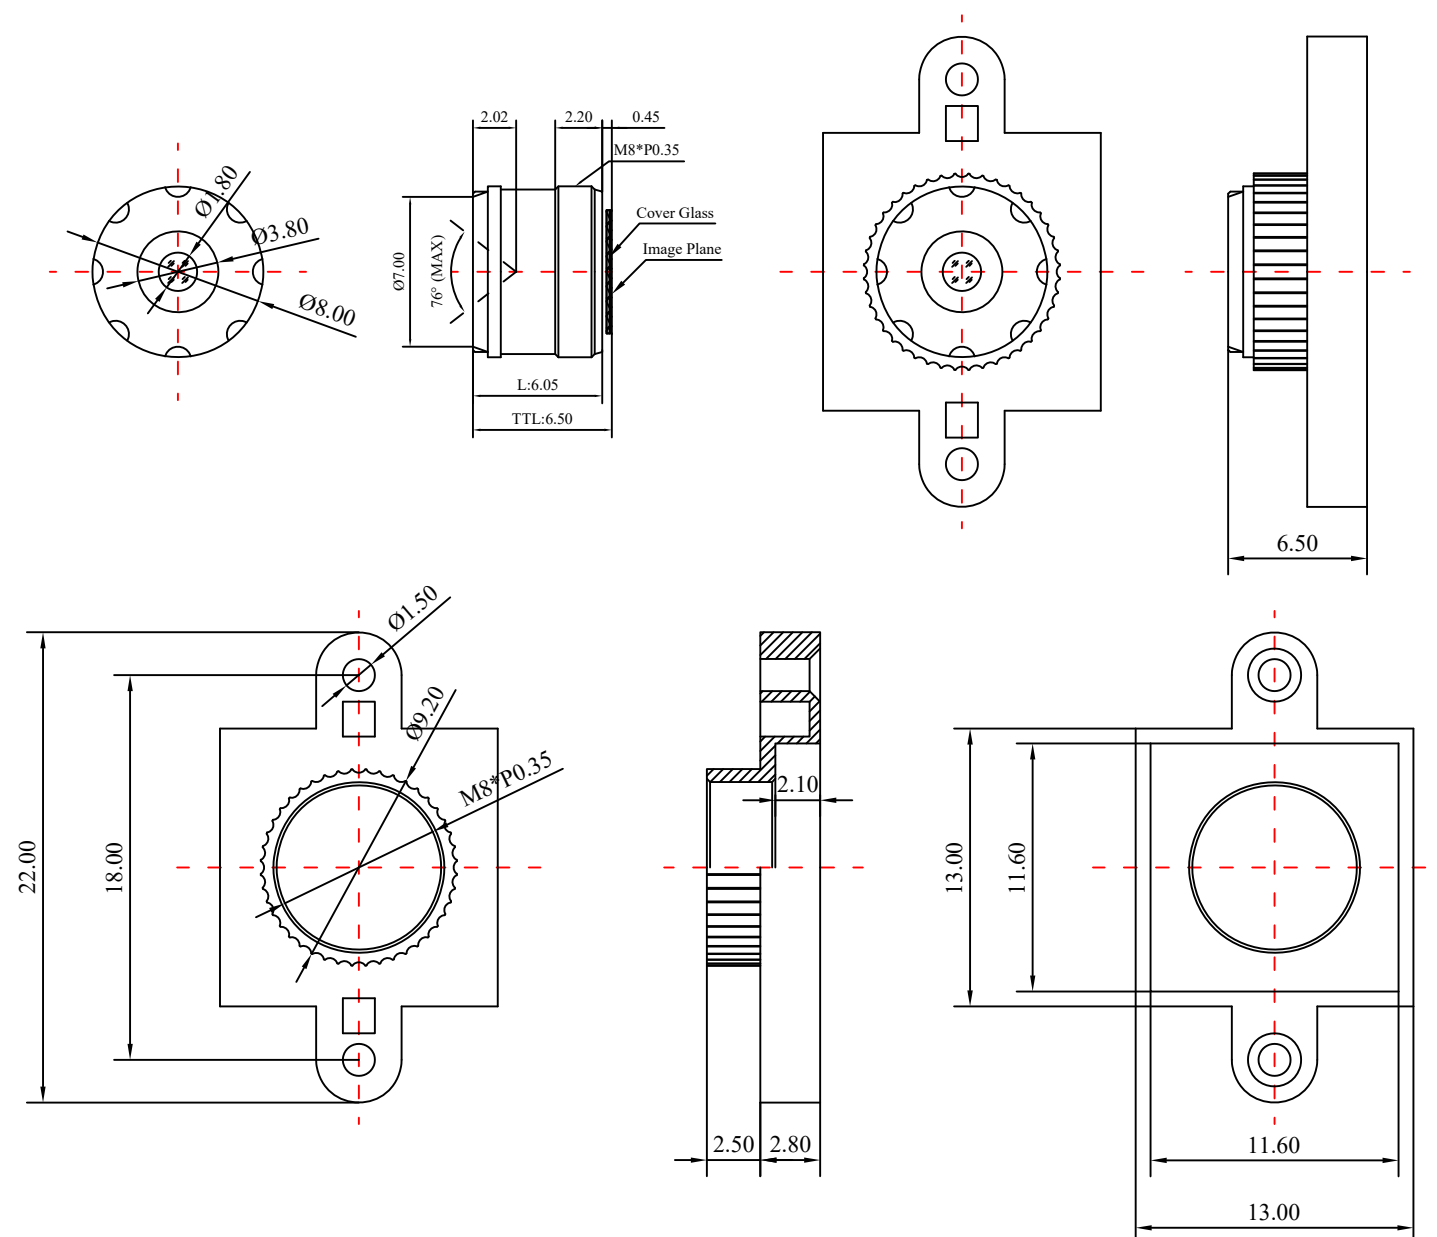


1	Type		Non Distortion Lens	
2	Resolution		5MP	
3	Image Format		1/2.7"	
4	Image Circle		φ6.8mm(MAX)	
5	EFL		4.57mm	
6	TTL		6.5mm	
7	F/NO.		2.3	
8	FFL (M)		0.45mm	
9	BFL (O)		1.05mm	
10	For Sensor		IMX335	OV2710
11	F.O.V	Horizontal	62°	65°
12		Vertical	36°	39°
13		Diagonal	70°	73°
14	OPT Distortion		<-1.0%	
15	Relative Ill.		>50%	
16	Chief Ray Angle		<16.7°	
17	M.O.D		0.1m~∞	
18	Mount Type		M8*P0.35	
19	Dimension Figure		φ8.0*L6.05mm	
20	Lens Structure		1G3P	
21	IR-Filter		T=50%&IR650±10nm	
22	Waterproof		No	
23	Weight		1.0g	
24	Iris Operation		Fixed	
25	Zoom Operation		Fixed	
26	Focus Operation		Manual	
27	Operating Temperature		-30° ~+75°	
28	Storage Temperature		-30° ~+75°	



Remark: Holder CH5311A

Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
2:1	X	±0.2	2022-11-29	CH3644HB+5311A Rev1.1		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2019-06-17	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2019-08-14	
mm	Angle	±0.5°	Approval	Sanmu	2019-08-21	