
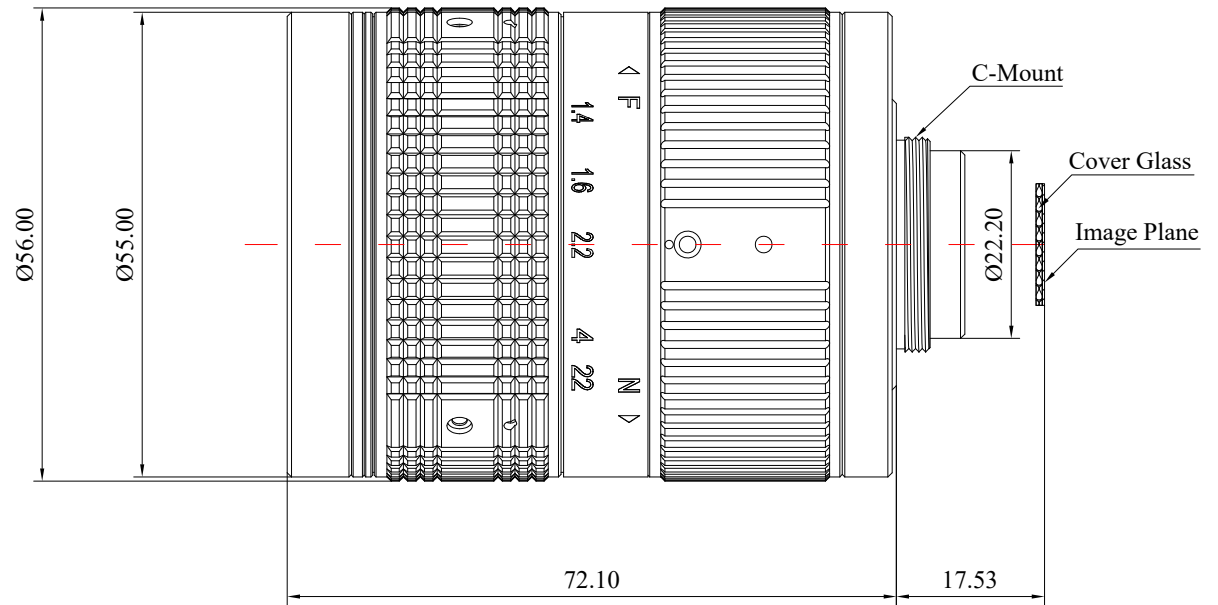


1	Type	ITS Lens	
2	Resolution	12MP	
3	Image Format	1.1"	
4	Image Circle	φ17.6mm(MAX)	
5	EFL	50mm	
6	Flange BFL	17.53mm	
7	F/NO.	F1.4-22	
8	FFL (M)	9.872mm	
9	BFL (O)	11.453mm	
10	For Sensor	IMX533	
11	F.O.V	Horizontal	13.6°
12		Vertical	13.3°
13		Diagonal	19.1°
14	OPT Distortion	<-2.13%@17.6mm	
15	Relative Ill.	---	
16	Chief Ray Angle	<10.5°	
17	M.O.D	1m~∞	
18	Mount Type	C-Mount	
19	Dimension Figure	φ55*L72.10mm	
20	Lens Structure	---	
21	IR-Filter	---	
22	IR-Correction	Yes	
23	Weight	335g	
24	Iris Operation	Manual	
25	Zoom Operation	Fixed	
26	Focus Operation	Manual	
27	Operating Temperature	-20° ~+85°	
28	Storage Temperature	-20° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2020-05-14	CH3686B Rev1.0		
Units	X.00	±0.10	Design	Linda	2018-03-13	
mm	X.000	±0.001	Checked	Anna	2018-04-09	 3D Angle Projection
	Angle	±0.5°	Approval	Sanmu	2018-04-19	