


1	Type		Wide Angle Lens		
2	Resolution		6MP		
3	Image Format		1/2.8"		
4	Image Circle		φ6.9mm(MAX)		
5	EFL		2.6mm		
6	TTL		16.77mm		
7	F/NO.		2.0		
8	FFL (M)		2.94mm		
9	BFL (O)		3.70mm		
10	For Sensor		IMX335	IMX307	IMX415
11	F.O.V	Horizontal	124°	138°	137°
12		Vertical	89°	70°	70°
13		Diagonal	172.2°	168°	168°
14	OPT Distortion		<-88%		
15	Relative Ill.		>60%		
16	Chief Ray Angle		<10°		
17	M.O.D		0.1m~∞		
18	Mount Type		M12*P0.5		
19	Dimension Figure		φ14.00*L13.83mm		
20	Lens Structure		6G		
21	IR-Filter		T=50%&IR650±10nm		
22	Waterproof		IP67		
23	Weight		---		
24	Iris Operation		Fixed		
25	Zoom Operation		Fixed		
26	Focus Operation		Manual		
27	Operating Temperature		-20° ~+85°		
28	Storage Temperature		-20° ~+85°		

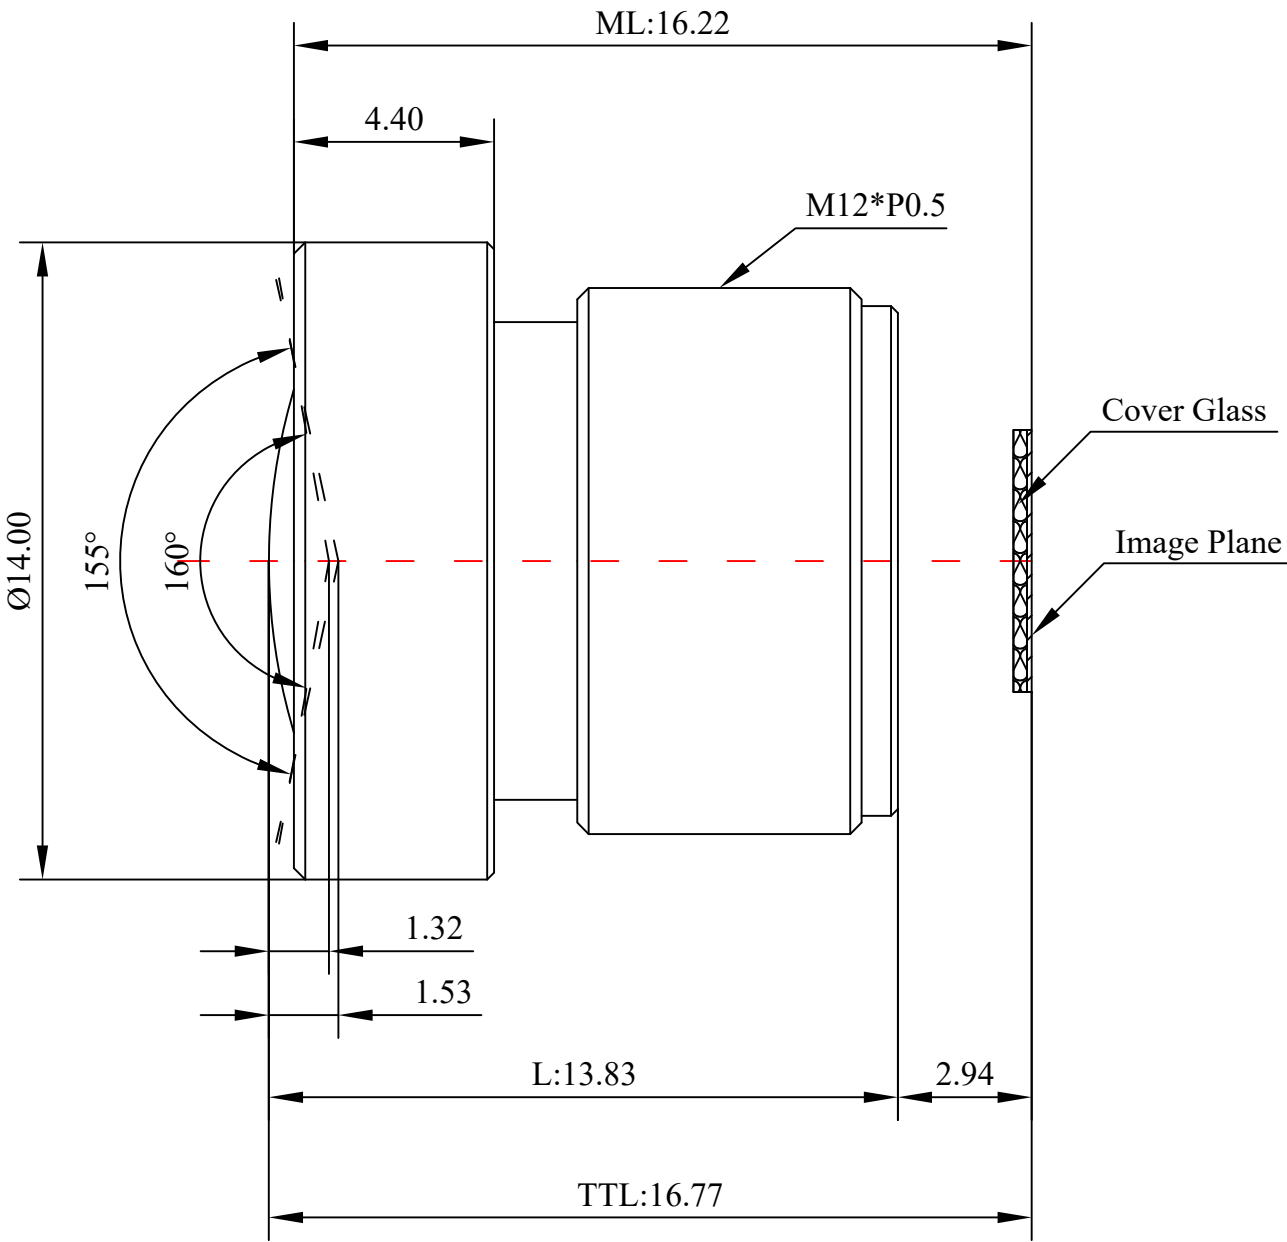

Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2021-11-03	CH3716EB Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2020-03-26	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2020-04-20	
mm	Angle	±0.5°	Approval	Sanmu	2020-05-13	