
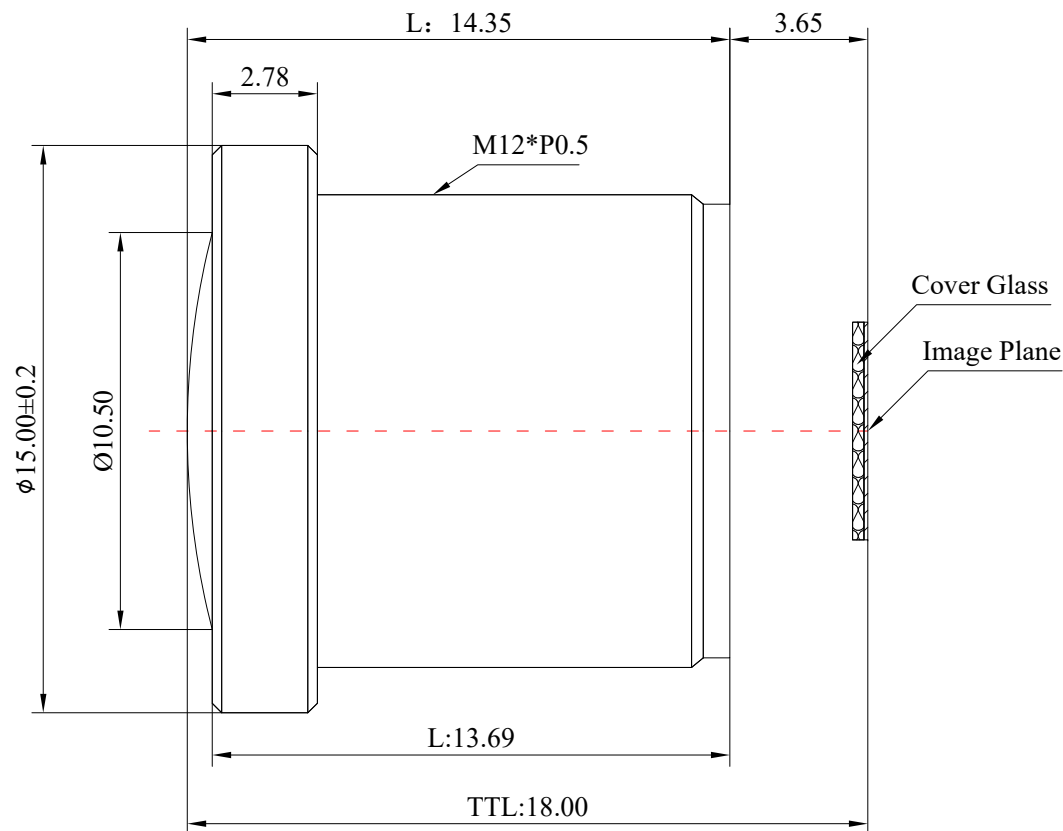


1	Type		Wide Angle Lens
2	Resolution		MP
3	Image Format		1/3" & 1/4"
4	Image Circle		φ6.7mm(MAX)
5	EFL		2.33mm
6	TTL		18.00mm
7	F/NO.		2.5
8	FFL (M)		3.65mm
9	BFL (O)		4.53mm
10	For Sensor		1/3"
11	F.O.V	Horizontal	133.1°
12		Vertical	69.3°
13		Diagonal	161.4°
14	TV Distortion		<-20%
15	Relative Ill.		>85%
16	Chief Ray Angle		<12.5°
17	M.O.D		0.1m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		φ15.00*L14.35mm
20	Lens Structure		6G
21	IR-Filter		IR650-850nm/DN
22	Waterproof		IP67
23	Weight		5g
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-20° ~+85°
28	Storage Temperature		-20° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2019-07-22	CH373D Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2015-05-26	
	X.000	±0.001	Checked	Anna	2015-07-20	
mm	Angle	±0.5°	Approval	Sanmu	2015-07-20	