
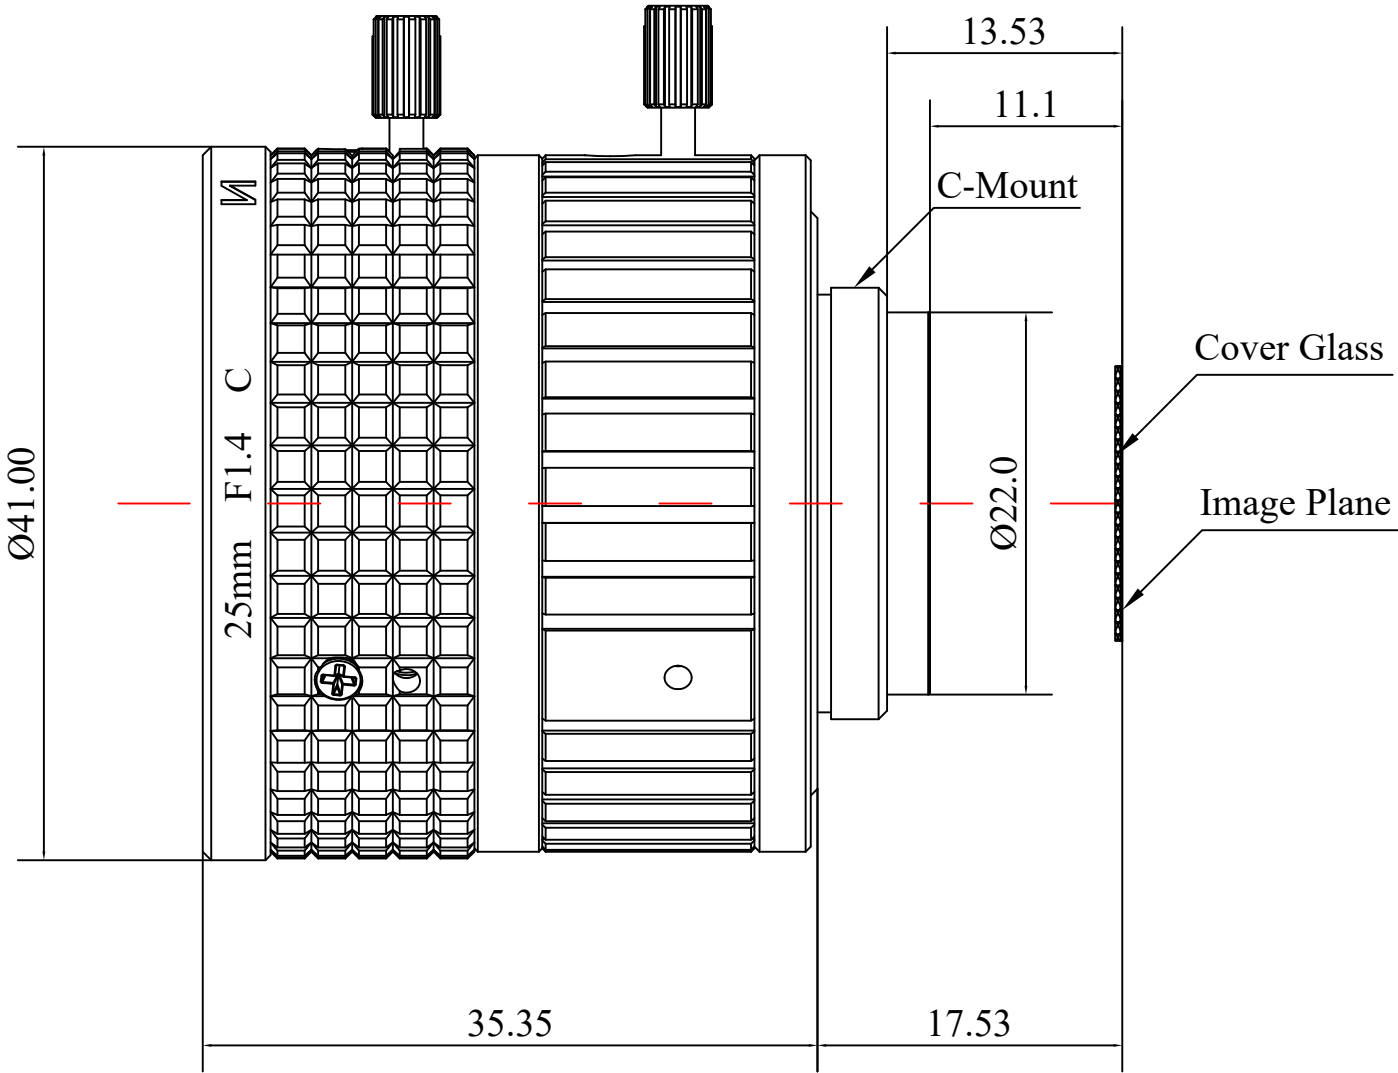


1	Type		SWIR Lens
2	Resolution		5MP
3	Image Format		1"
4	Image Circle		φ16.0mm(MAX)
5	EFL		25mm
6	TTL		53.75mm
7	F/NO.		1.4
8	FFL (M)		17.53mm
9	BFL (O)		11.1mm
10	For Sensor		1"
11	F.O.V	Horizontal	28.6°
12		Vertical	21.5°
13		Diagonal	35.4°
14	OPT Distortion		<-1.39%
15	Relative Ill.		---
16	Chief Ray Angle		---
17	M.O.D		0.3m~∞
18	Mount Type		C-Mount
19	Dimension Figure		φ41.0*L35.35mm
20	Lens Structure		12G
21	IR-Filter		Non-IR
22	IR Correction		900-1700nm
23	Waterproof		No
24	Weight		115g
25	Iris Operation		Fixed
26	Zoom Operation		Fixed
27	Focus Operation		Manual



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	± 0.2	2022-08-15	CH3808B Rev1.0		
4: 1	X.0	± 0.15				
Units	X.00	± 0.10	Design	Linda	2019-06-11	 3D Angle Projection
	X.000	± 0.001	Checked	Anna	2019-08-12	
mm	Angle	± 0.5 °	Approval	Sanmu	2019-08-15	