
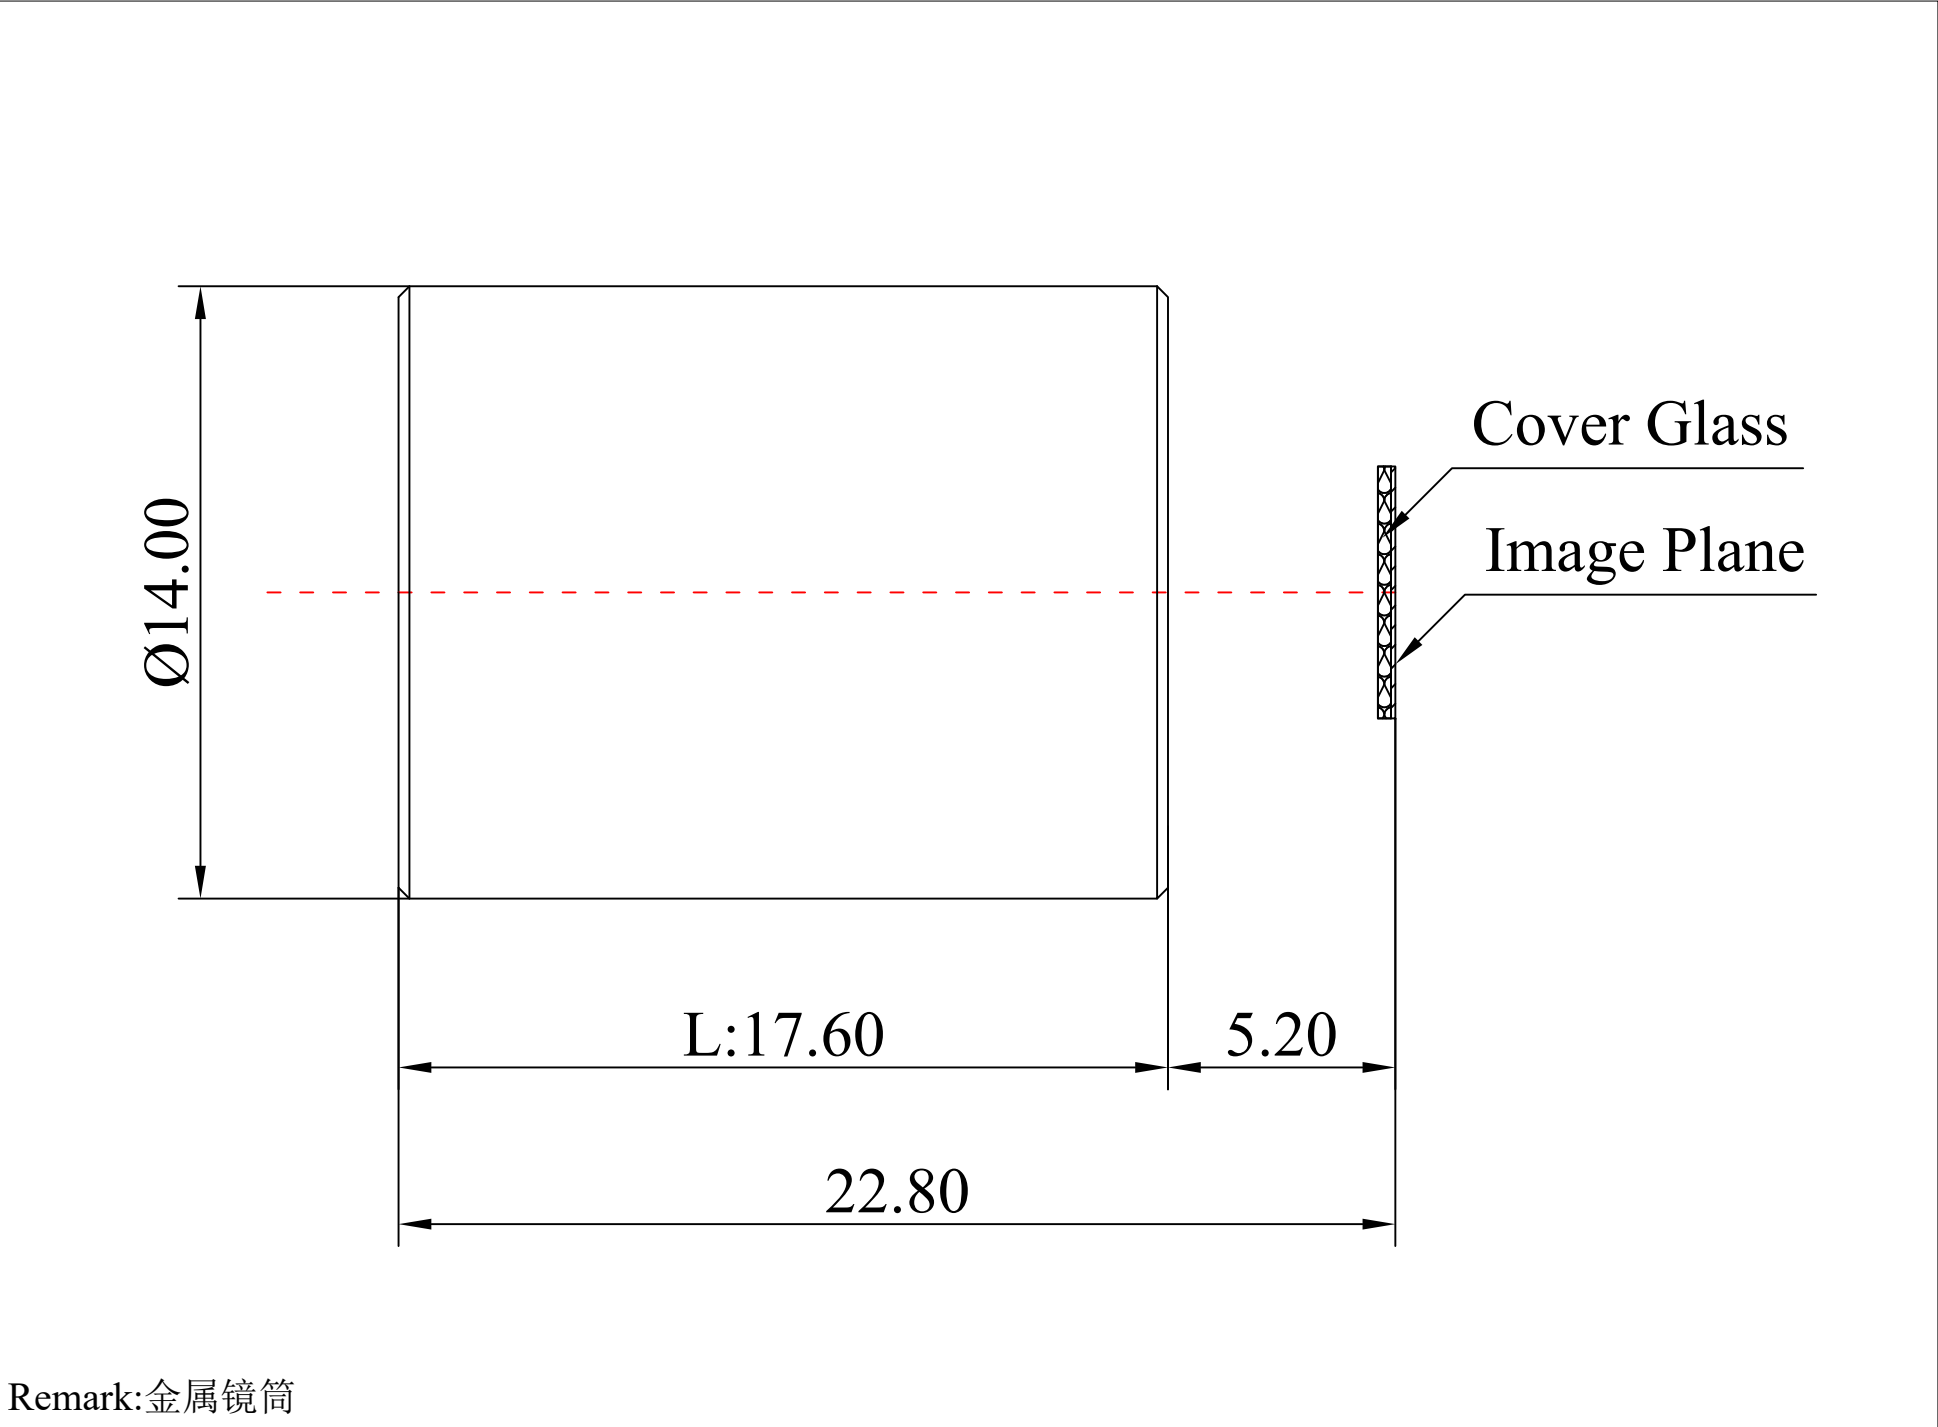


1	Type		M12 Lens
2	Resolution		5MP
3	Image Format		1/2.7"
4	Image Circle		φ7.0mm(MAX)
5	EFL		6.0mm
6	TTL		22.80mm
7	F/NO.		1.6
8	FFL (M)		5.20mm
9	BFL (O)		6.35mm
10	For Sensor		1/2.7"
11	F.O.V	Horizontal	61°
12		Vertical	32°
13		Diagonal	72°
14	TV Distortion		<-11%
15	Relative Ill.		>51%
16	Chief Ray Angle		<15.0°
17	M.O.D		0.1m~∞
18	Mount Type		AA Ø14.0
19	Dimension Figure		φ14.0*L17.60mm
20	Lens Structure		1G4P
21	IR-Filter		Non-IR
22	Waterproof		No
23	Weight		---
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-15° ~+65°
28	Storage Temperature		-15° ~+65°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2022-10-17	CH3818B Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2020-05-10	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2020-06-08	
mm	Angle	±0.5°	Approval	Sanmu	2020-06-13	