
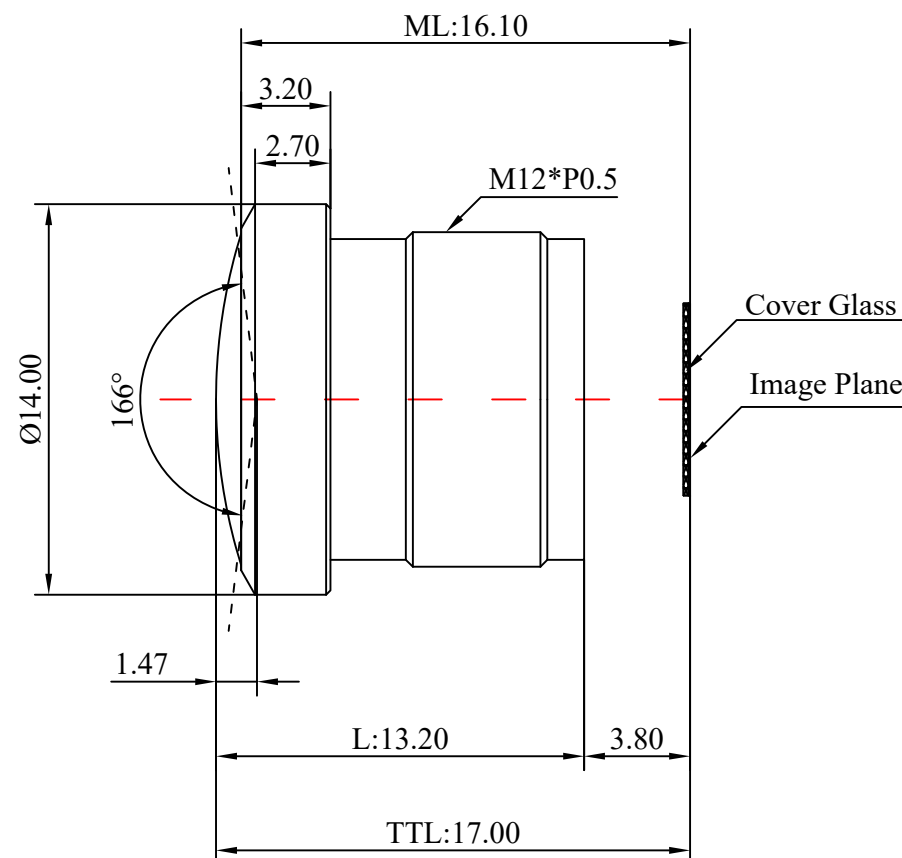


1	Type			Wide Angle Lens		
2	Resolution			5MP		
3	Image Format			1/2.7"		
4	Image Circle			φ6.42mm(MAX)		
5	EFL			2.4mm		
6	TTL			17.0mm		
7	F/NO.			F1.8		
8	FFL (M)			3.8mm		
9	BFL (O)			5.3mm		
10	For Sensor		AR0237	IMX335	GC2053	OV4689
11	F.O.V	H	140°	130°	125°	115°
12		V	90°	82°	78°	75°
13		D	170°	162°	152°	140°
14	TV Distortion			<-10.2%		
15	Relative Ill.			>72%		
16	Chief Ray Angle			<16°		
17	M.O.D			0.1m~∞		
18	Mount Type			M12*P0.5		
19	Dimension Figure			φ14.00*L13.20mm		
20	Lens Structure			6G		
21	IR-Filter			T=50%&IR650±10nm		
22	Waterproof			IP68		
23	Weight			5.5g		
24	Iris Operation			Fixed		
25	Zoom Operation			Fixed		
26	Focus Operation			Manual		
27	Operating Temperature			-20° ~+85°		
28	Storage Temperature			-20° ~+85°		



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2022-12-22	CH3826AB Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2022-11-03	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2022-11-26	
mm	Angle	±0.5°	Approval	Sanmu	2022-11-28	