
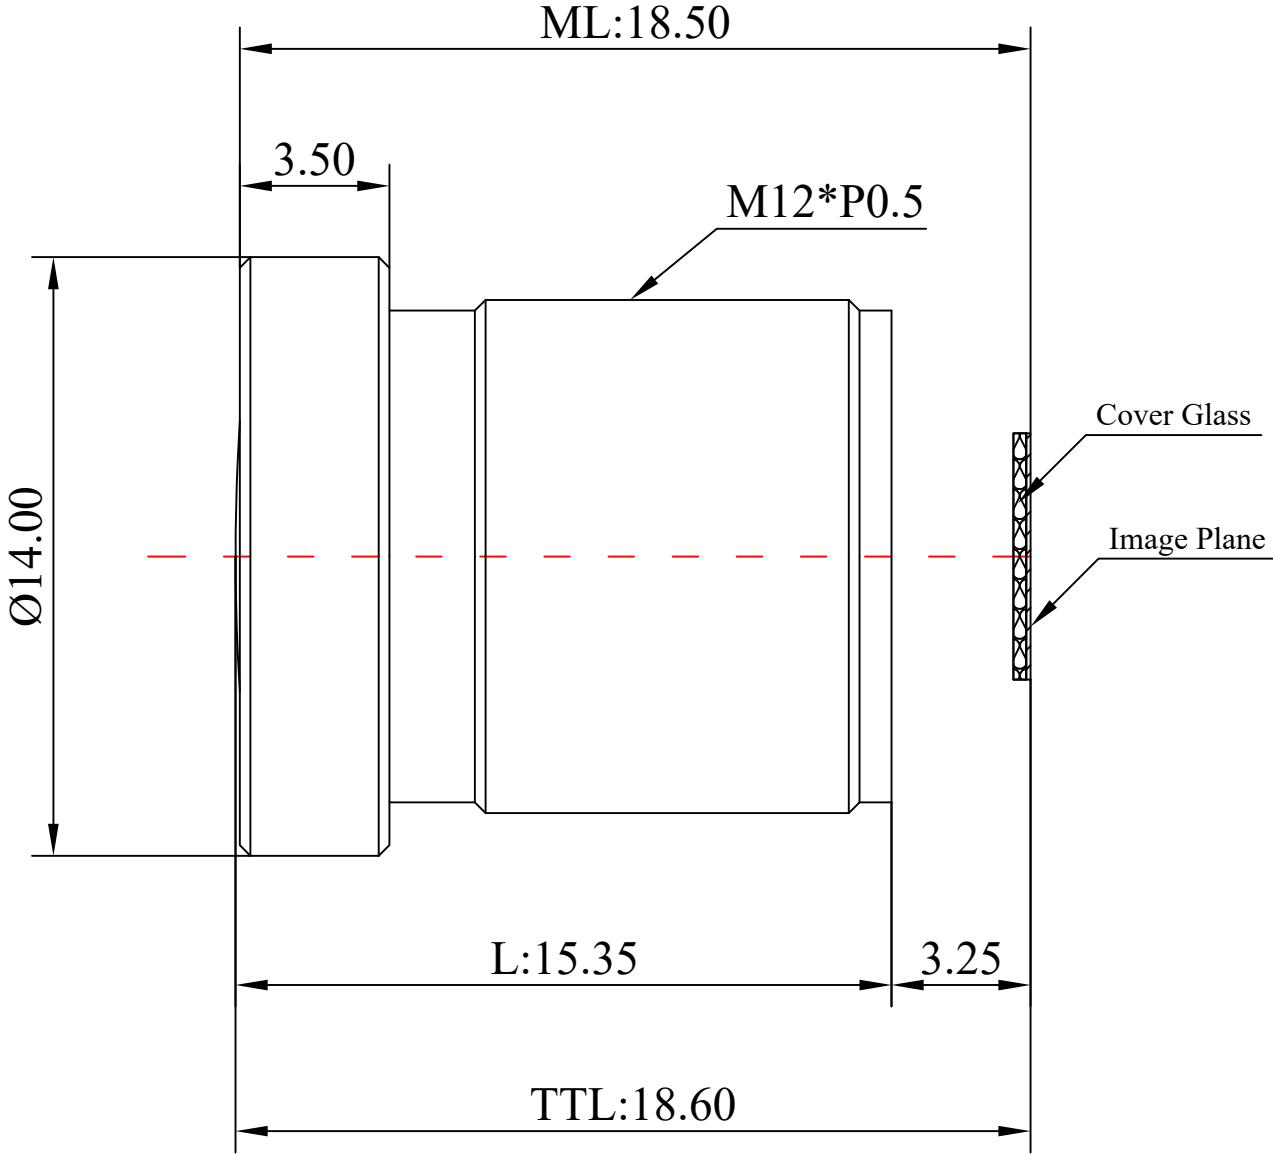


1	Type		Wide Angle Lens
2	Resolution		MP
3	Image Format		1/4"
4	Image Circle		φ5.30mm(MAX)
5	EFL		2.15mm
6	TTL		18.60mm
7	F/NO.		2.3
8	FFL (M)		3.25mm
9	BFL (O)		4.50mm
10	For Sensor		1/4"
11	F.O.V	Horizontal	116°
12		Vertical	58°
13		Diagonal	146°
14	TV Distortion		<-22.5%
15	Relative Ill.		>68%
16	Chief Ray Angle		<13.5°
17	M.O.D		0.1m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		φ14.00*L15.35mm
20	Lens Structure		4G
21	IR-Filter		T=50%&IR650±10nm
22	Waterproof		No
23	Weight		---
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-20° ~+85°
28	Storage Temperature		-20° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2023-03-31	CH3835AB Rev1.0		
	4:1	X.0	±0.15			
Units	X.00	±0.10	Design	Linda	2023-02-16	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2023-03-24	
mm	Angle	±0.5°	Approval	Sanmu	2023-03-29	