


1	Type	Objective Lens			
2	Resolution	5MP			
3	Image Format	1/1.8"			
4	Image Circle	Ø9.0mm (Max)			
5	EFL	35mm			
6	TTL	60.0mm			
7	F/NO.	F1.0			
8	FFL (M)	9.0mm			
9	BFL (O)	12.4mm			
10	For Sensor	1/1.8"	1/2"	1/2.7"	
11	F.O.V	Horizontal	11.2°	10.6°	9.6°
12		Vertical	8.8°	8°	5.4°
13		Diagonal	13.8°	13°	10.8°
14	TV Distortion	<-0.1%			
15	Chief Ray Angle	---			
16	M.O.D	0.2m~∞			
17	Mount Type	M34*P0.75			
18	Dimension Figure	Ø40.0mm*59.5mm			
19	Lens Structure	6E6G			
20	IR Sensitive	Yes			
21	Waterproof	No			
22	Weight	116g			
23	Iris Operation	Fixed			
24	Zoom Operation	Fixed			
25	Focus Operation	Manual			
26	Operating Temperature	-20° ~+80°			
27	Storage Temperature	-20° ~+80°			



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4: 1	X	± 0.2	2023-06-08	CH3888A Rev1.0		
	X.0	± 0.15				
Units	X.00	± 0.10	Design	Linda	2023-03-11	
	X.000	± 0.001	Checked	Anna	2023-04-12	
mm	Angle	± 0.5°	Approval	Sanmu	2023-06-05	

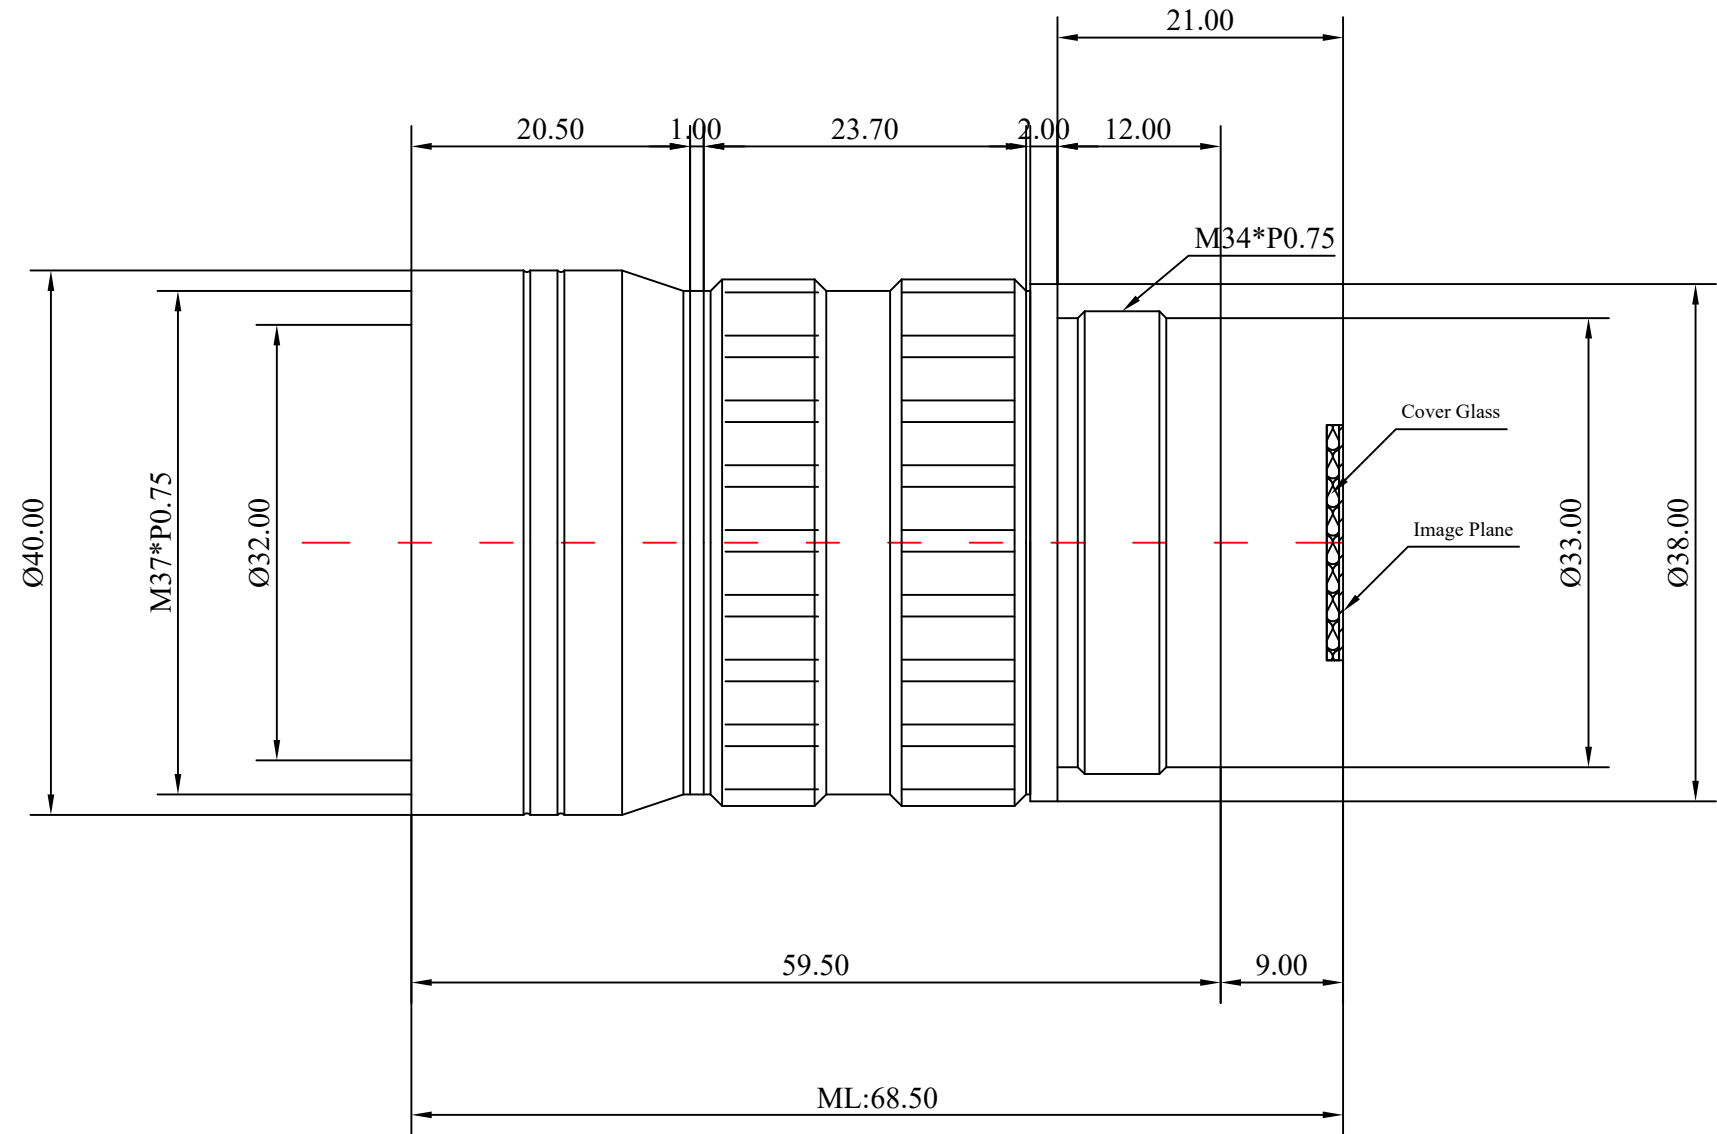