


Type		Macro Lens					
EFL		75mm					
F.No		F3.8~16					
Flange Back		17.526mm					
Mount		C-Mount					
O/I		357~557mm					
Distartion(TV)		<0.05%					
Iris Operation		Manual					
Zoom Operation		Fixed					
Focus Operation		Manual					
Operating Temperature		-20~60°C					
Storage Temperature		-20~60°C					
Wordking Distance	Optical Magnifcation	F.O.V(mm)					
		1.1"(H*V)		1"(H*V)		2/3"(H*V)	
257	-0.38X	37.05	27.78	33.68	25.26	23.15	17.36
282	-0.337X	41.78	31.33	37.98	28.48	26.11	19.58
307	-0.302X	46.62	34.96	42.38	31.78	29.13	21.85
332	-0.274X	51.38	38.54	46.71	35.03	32.11	24.08
357	-0.25X	56.32	42.24	51.2	38.4	35.2	26.4
382	-0.231X	60.95	45.71	55.41	41.55	38.09	28.57
407	-0.214X	65.79	45.71	59.81	44.85	41.12	30.84
432	-0.2X	70.4	52.8	64	48	44	33
457	-0.186X	75.69	56.77	68.81	51.61	47.31	35.48
471	-0.18X	78.22	58.66	71.11	53.33	48.88	36.66



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2024-05-08	CH696A Rev1.0		
4:1	X.0	±0.15				
	X.00	±0.10	Design	Linda	2024-03-16	
Units	X.000	±0.001	Checked	Anna	2024-03-21	
	Angle	±0.5°	Approval	Sanmu	2024-04-26	

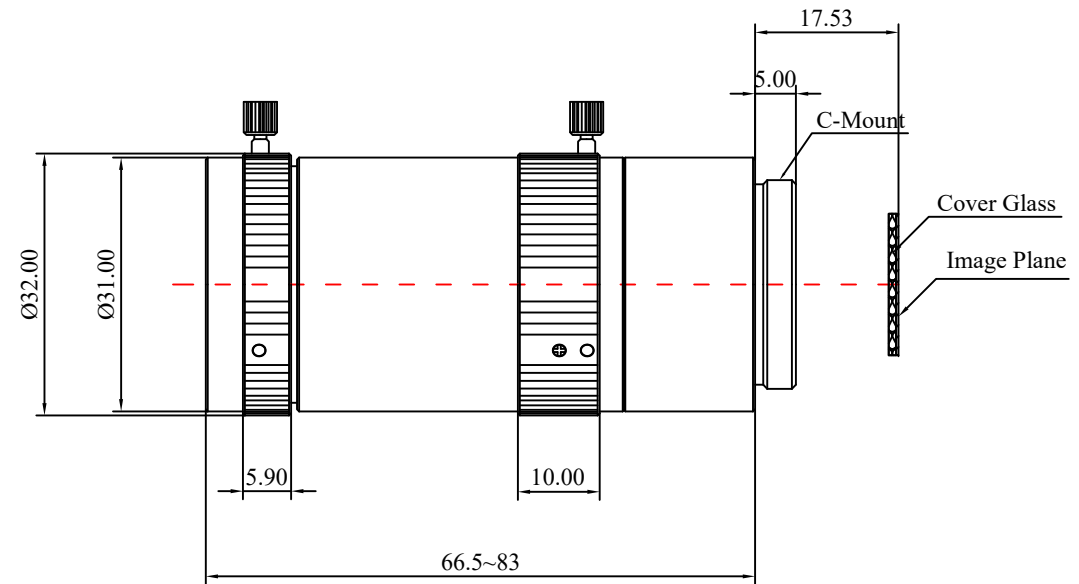