
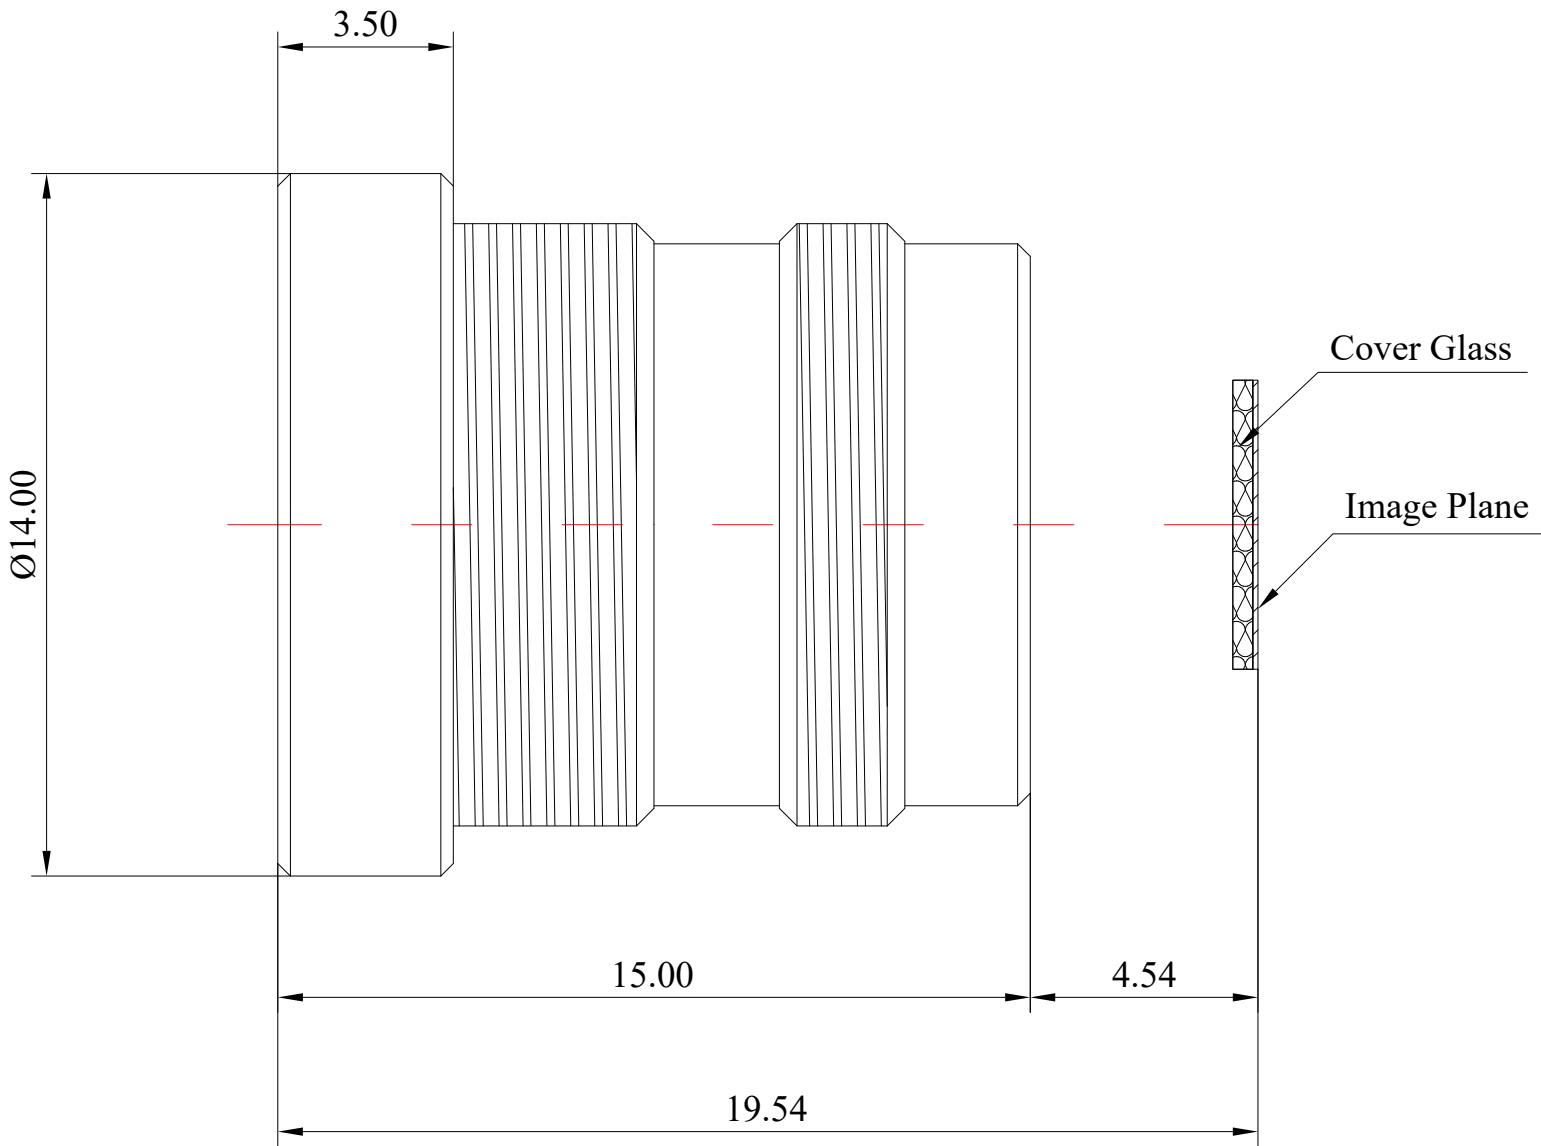


1	Type		M12 Lens	
2	Resolution		0.8MP	
3	Image Format		1/3"	
4	Image Circle		Ø7.0mm(MAX)	
5	EFL		6mm	
6	TTL		19.54mm	
7	F/NO.		F2.0	
8	FFL (M)		4.54mm	
9	BFL (O)		6.5mm	
10	For Sensor		1/3"	1/4"
11	F.O.V	Horizontal	39.9°	30.2°
12		Vertical	30.3°	30.2°
13		Diagonal	48.9°	37.4°
14	TV Distortion		<-0.6%	<-0.5%
15	Relative Ill.		>43.3%	>87%
16	Chief Ray Angle		<9.6°	<7.7°
17	M.O.D		0.1m~∞	
18	Mount Type		M12*P0.5	
19	Dimension Figure		Ø14.0*L15.00mm	
20	Lens Structure		4G	
21	IR-Filter		Non-IR	
22	Waterproof		No	
23	Weight		/	
24	Iris Operation		Fixed	
25	Zoom Operation		Fixed	
26	Focus Operation		Manual	
27	Operating Temperature		-20° ~+85°	
28	Storage Temperature		-20° ~+85°	



Remark:9607CM

Scale	Remark	Tolerances	Date	Revsied		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2019-07-05	CH810F Rev1.0		
4: 1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2015-06-02	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2015-08-18	
mm	Angle	±0.05°	Approval	Sanmu	2015-08-26	